

### 2-way, Characterized Control Valve, Stainless Steel Ball and Stem







Type overview	
Туре	DN
B250	50

chnical data			
Functional data	Valve size [mm]	2" [50]	
	Fluid	chilled or hot water, up to 60% glycol	
	Fluid Temp Range (water)	0250°F [-18120°C]	
	Body Pressure Rating	400 psi	
	Close-off pressure ∆ps	200 psi	
	Flow characteristic	equal percentage	
	Leakage rate	0% for A – AB	
	Pipe connection	Internal thread	
		NPT (female)	
	Servicing	maintenance-free	
	Flow Pattern	2-way	
	Controllable flow range	75°	
	Cv	57	
	No Characterized Disc	TRUE	
Materials	Valve body	Nickel-plated brass body	
	Stem	stainless steel	
	Stem seal	EPDM (lubricated)	
	Seat	PTFE	
	Characterized disc	No Disc (full flow)	
	O-ring	EPDM (lubricated)	
	Ball	stainless steel	
Suitable actuators	Non Fail-Safe	ARB(X)	

# Safety notes



Spring

 WARNING: This product can expose you to lead which is known to the State of California to cause cancer and reproductive harm. For more information go to www.p65warnings.ca.gov

ARQB(X) ARB(X) N4 AFRB(X)



### **Product features**

# Application

This valve is typically used in air handling units on heating or cooling coils, and fan coil unit heating or cooling coils. Some other common applications include Unit Ventilators, VAV box re-heat coils and bypass loops. This valve is suitable for use in a hydronic system with variable flow.


### Flow/Mounting details


 $A \rightarrow AB = 0\%$   $A \rightarrow AB = 100\%$ 

Two-way valves should be installed with the disc upstream.


# **Dimensions**

Туре	DN	Weight	
R250	50	2 8 lh [1 3 kg]	

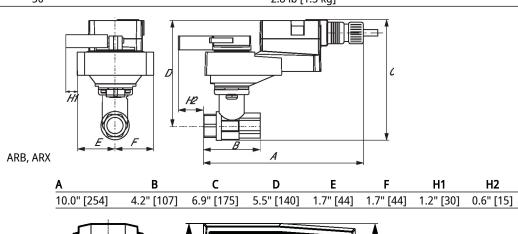

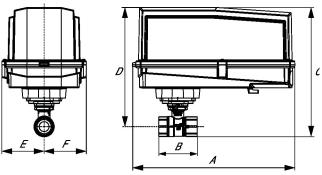


ARB N4, ARX N4, NRB N4, NRX N4

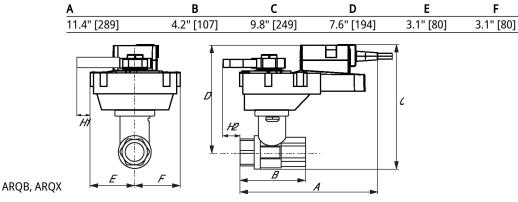



# **Dimensions**

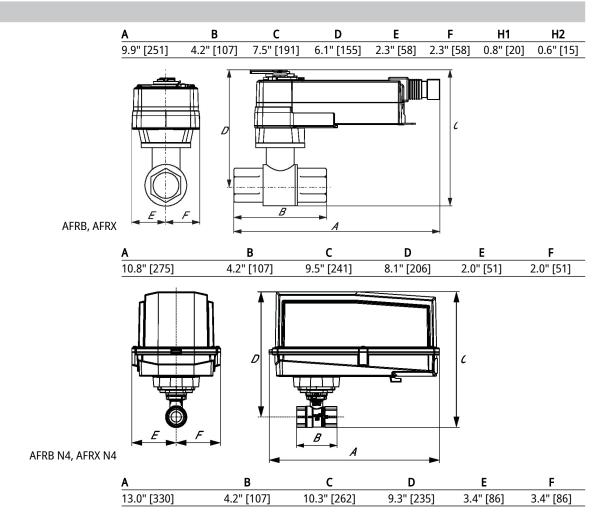









Technical data			
Electrical data	Nominal voltage	AC/DC 24 V	
	Nominal voltage frequency	50/60 Hz	
	Nominal voltage range	AC 19.228.8 V / DC 21.628.8 V	
	Power consumption in operation	2.5 W	
	Power consumption in rest position	0.4 W	
	Transformer sizing	5 VA	
	Electrical Connection	18 GA plenum cable, 1 m, with 1/2" NPT conduit connector	
	Overload Protection	electronic thoughout 090° rotation	
Functional data	Operating range Y	210 V	
	Operating range Y note	420 mA w/ ZG-R01 (500 $\Omega$ , 1/4 W resistor)	
	Input impedance	100 k $\Omega$ for 210 V (0.1 mA), 500 $\Omega$ for 420 mA	
	Position feedback U	210 V	
	Position feedback U note	Max. 1 mA	
	Direction of motion motor	selectable with switch 0/1	
	Manual override	external push button	
	Angle of rotation	90°	
	Angle of rotation note	adjustable with mechanical stop	
	Running Time (Motor)	90 s / 90°	
	Noise level, motor	45 dB(A)	
	Position indication	Mechanical, pluggable	
Safety data	Power source UL	Class 2 Supply	
	Degree of protection IEC/EN	IP54	
	Degree of protection NEMA/UL	NEMA 2	
	Enclosure	UL Enclosure Type 2	
	Agency Listing	cULus acc. to UL60730-1A/-2-14, CAN/CSA E60730-1:02, CE acc. to 2014/30/EU	
	Quality Standard	ISO 9001	
	UL 2043 Compliant	Suitable for use in air plenums per Section 300.22(C) of the NEC and Section 602 of the IMC	
	Ambient humidity	Max. 95% RH, non-condensing	
	Ambient temperature	-22122°F [-3050°C]	
	Storage temperature	-40176°F [-4080°C]	
	Servicing	maintenance-free	
Weight	Weight	2.2 lb [1 kg]	

Materials

Housing material

Galvanized steel and plastic housing



Footnotes †Rated Impulse Voltage 800 V, Type action 1, Control Pollution Degree 3.

### **Accessories**

Electrical accessories	Description	Туре
	Battery backup system, for non-spring return models	NSV24 US
	Battery, 12 V, 1.2 Ah (two required)	NSV-BAT

### **Electrical installation**

### **INSTALLATION NOTES**

Provide overload protection and disconnect as required.

Actuators may be connected in parallel. Power consumption and input impedance must be observed.

Only connect common to negative (-) leg of control circuits.  $\bigwedge$  A 500  $\Omega$  resistor (ZG-R01) converts the 4...20 mA control signal to 2...10 V.

Actuators with plenum cable do not have numbers; use color codes instead.

Meets cULus requirements without the need of an electrical ground connection.

### Warning! Live electrical components!

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

# Wiring diagrams

