



Efficiency and
reliability in versatile
applications

The complete product range of water applications

Edition 2025

50
YEARS

Together
to the Top.

BELIMO[®]

Table of contents

Control valves	Zone valves	5	4
	Pressure-independent characterised control valves	29	5
	Characterised control valves (CCV)	37	6
	Globe Valves	49	7
	Control butterfly valves	71	8
Open/close and changeover valves	Ball valves	79	9
	Potable water valves	89	10
	Open/close and changeover butterfly valves	93	11
Definitions	Formula symbols	99	

4

Zone valves**Maximum comfort, minimum consumption**


Characterised control valve (QCV)	Internal thread	2-way	PN 25	DN 15...25	6	
Changeover ball valve (QCV)		3-way			8	
Characterised control valve (QCV)	External thread	2-way	PN 25	DN 15/20	10	
Changeover ball valve (QCV)		3-way			12	
Pressure-independent characterised control valve (PIQCV)	Internal thread	2-way	PN 25	DN 15...25	14	
Pressure-independent flow limiter valve (PIFLV)					16	
Characterised Control Valve	Internal thread	6-way	PN 16	DN 15	18	
					DN 20	22
					DN 25	24
					DN 15/20	25
Electronic pressure-independent characterised control valve (EPIV)				DN 15/20	25	
Energy manifold				2...12 zones	26	

Please refer to the data sheets or notes for project planning for further technical data to be observed.

DN 15...25

Non fail-safe actuators


Field of use	Closed water circuit (pH >7)
Fluid temperature	2...90°C
Pipe connection	Internal thread Rp (ISO 7-1)
Leakage rate	Air-bubble tight, leakage rate A (EN 12266-1)
Flow characteristic	Equal percentage
Close-off pressure	Δp_s : 520 kPa
Max. differential pressure	Δp_{max} : 280 kPa
Permissible operating pressure	p_s : 1600 kPa

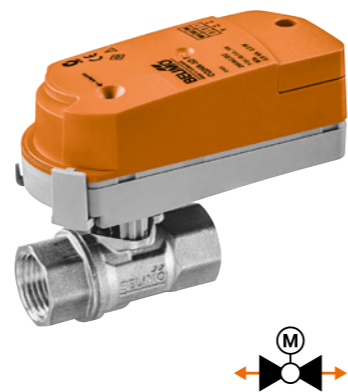

DN 15...25

Fail-safe actuators

Field of use	Closed water circuit (pH >7)
Fluid temperature	2...90°C
Pipe connection	Internal thread Rp (ISO 7-1)
Leakage rate	Air-bubble tight, leakage rate A (EN 12266-1)
Flow characteristic	Equal percentage
Close-off pressure	Δp_s : 520 kPa
Max. differential pressure	Δp_{max} : 280 kPa
Permissible operating pressure	p_s : 1600 kPa

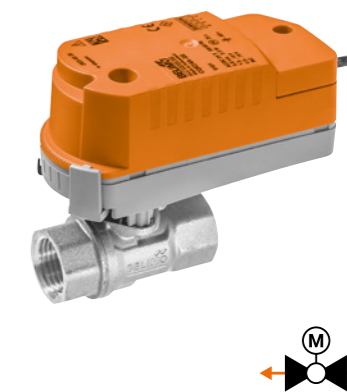

Suitable actuators	Nominal torque	Open/close	3-point	Modulating (2...10 V)	Modulating (0.5...10 V)	Communication MP-Bus	Communication Modbus	Communication BACnet	Nominal voltage AC/DC 24 V AC 230 V	Running time motor 90°	Actuator type	PN 25							
												DN 15		DN 20		DN 25			
												K_{vs} [m³/h]	Valve type	K_{vs} [m³/h]	Valve type	K_{vs} [m³/h]	Valve type		
												0.09...1.2	C215Q-F	0.5...8	C220Q-K	0.5...7	C225Q-K		
		Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa												
CQ..	1 Nm	■	■	■	■	■	■	■	24 V	15 s	CQD24A ¹⁾	520	280	520	280	520	280		
												75 s	CQ24A	520	280	520	280	520	280
												15 s	CQD24A-SR ¹⁾	520	280	520	280	520	280
												75 s	CQ24A-SR	520	280	520	280	520	280
												15 s	CQD24A-SZ ¹⁾	520	280	520	280	520	280
												75 s	CQ24A-SZ	520	280	520	280	520	280
												15 s	CQD24A-MPL ¹⁾	520	280	520	280	520	280
												75 s	CQ24A-MPL	520	280	520	280	520	280
												15 s	CQ24A-BAC	520	280	520	280	520	280
												75 s	CQ24A-BAC	520	280	520	280	520	280
												15 s	CQD230A ¹⁾	520	280	520	280	520	280
												35 s	CQC230A ¹⁾	520	280	520	280	520	280
75 s	CQ230A	520	280	520	280	520	280												
CQ..-T	1 Nm	■	■	■	■	■	■	■	24 V	15 s	CQD24A-T ¹⁾	520	280	520	280	520	280		
												75 s	CQ24A-T	520	280	520	280	520	280
												15 s	CQD24A-SR-T ¹⁾	520	280	520	280	520	280
												75 s	CQ24A-SR-T	520	280	520	280	520	280
												15 s	CQD24A-SZ-T ¹⁾	520	280	520	280	520	280
												75 s	CQ24A-SZ-T	520	280	520	280	520	280
												15 s	CQD24A-MPL-T	520	280	520	280	520	280
												75 s	CQ24A-MPL-T	520	280	520	280	520	280
												15 s	CQD230A-T	520	280	520	280	520	280
												35 s	CQC230A-T	520	280	520	280	520	280
												75 s	CQ230A-T	520	280	520	280	520	280


Suitable actuators	Nominal torque	Open/close	Modulating (2...10 V)	Modulating (0.5...10 V)	Communication MP-Bus	Nominal voltage AC/DC 24 V AC 230 V	Running time motor 90°	Actuator type	PN 25														
									DN 15		DN 20		DN 25										
									K_{vs} [m³/h]	Valve type	K_{vs} [m³/h]	Valve type	K_{vs} [m³/h]	Valve type									
									0.09...1.2	C215Q-F	0.5...8	C220Q-K	0.5...7	C225Q-K									
		Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa																
CQK..	1 Nm	■	■	■	■	24 V	15 s	CQKD24A ¹⁾	520	280	520	280	520	280									
									75 s	CQK24A	520	280	520	280	520	280							
									15 s	CQKD24A-SR ¹⁾	520	280	520	280	520	280							
									75 s	CQK24A-SR	520	280	520	280	520	280							
									15 s	CQKD24A-SZ.1 ^{1) 3)}	520	280	520	280	520	280							
									75 s	CQK24A-SZ.1 ³⁾	520	280	520	280	520	280							
									15 s	CQKD24A-MPL	520	280	520	280	520	280							
									75 s	CQK24A-MPL	520	280	520	280	520	280							
									15 s	CQKD230A ¹⁾	520	280	520	280	520	280							
									75 s	CQK230A	520	280	520	280	520	280							
									CQK..-T	1 Nm	■	■	■	■	24 V	75 s	CQK24A-T	520	280	520	280	520	280
																		CQK24A-SR-T	520	280	520	280	520
CQK24A-MPL-T	520	280	520	280	520	280																	
CQK230A-T	520	280	520	280	520	280																	

¹⁾ Fast running actuators: observe the noise level according to the associated data sheet.
²⁾ Fail-safe actuator: The fail-safe position is NC (normally closed). The NO (normally open) version is available on request.
³⁾ Actuator is delivered in multipack with 36 pieces.

DN 15...25

Non fail-safe actuators

Field of use	Closed water circuit (pH >7)
Fluid temperature	2...90°C
Pipe connection	Internal thread Rp (ISO 7-1)
Leakage rate	Air-bubble tight, leakage rate A (EN 12266-1)
Close-off pressure	Δp_s : 280 kPa
Max. differential pressure	Δp_{max} : 280 kPa
Permissible operating pressure	p_s : 1600 kPa

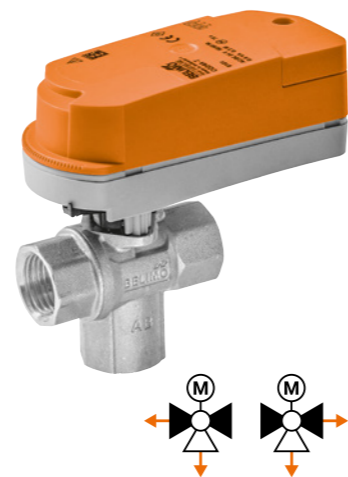


Suitable Actuators	Nominal torque	Open/close	3-point	Communication MP-Bus	Communication Modbus	Communication BACnet	Nominal voltage AC/DC 24 V AC 230 V	Running time motor 90°	Actuator type	PN 25					
										DN 15		DN 20		DN 25	
										K_{vs} [m³/h]	Valve type	K_{vs} [m³/h]	Valve type	K_{vs} [m³/h]	Valve type
										Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa
										2.5	C315Q-H	4	C320Q-J	4	C325Q-J
CQ..	1 Nm	■	■	-	-	-	24 V	15 s	CQD24A ¹⁾	280	280	280	280	280	280
								75 s	CQ24A	280	280	280	280	280	280
								15 s	CQD24A-MPL ¹⁾	280	280	280	280	280	280
								75 s	CQ24A-MPL	280	280	280	280	280	280
									CQ24A-BAC	280	280	280	280	280	280
								15 s	CQD230A ¹⁾	280	280	280	280	280	280
								35 s	CQC230A ¹⁾	280	280	280	280	280	280
CQ..-T	1 Nm	■	■	-	-	-	24 V	15 s	CQD24A-T ¹⁾	280	280	280	280	280	280
									CQ24A-T	280	280	280	280	280	280
								75 s	CQ24A-MPL-T	280	280	280	280	280	280
							230 V								
										280	280	280	280	280	280
										280	280	280	280	280	280

¹⁾ Fast running actuators: observe the noise level according to the associated data sheet.

DN 15...25

Fail-safe actuators

Field of use	Closed water circuit (pH >7)
Fluid temperature	2...90°C
Pipe connection	Internal thread Rp (ISO 7-1)
Leakage rate	Air-bubble tight, leakage rate A (EN 12266-1)
Close-off pressure	Δp_s : 280 kPa
Max. differential pressure	Δp_{max} : 280 kPa
Permissible operating pressure	p_s : 1600 kPa

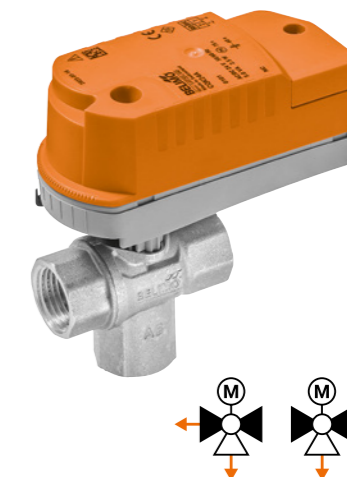


Suitable actuators	Nominal torque	Open/close	Communication MP-Bus	Nominal voltage AC/DC 24 V AC 230 V	Running time motor 90°	Actuator type	PN 25						
							DN 15		DN 20		DN 25		
							K_{vs} [m³/h]	Valve type	K_{vs} [m³/h]	Valve type	K_{vs} [m³/h]	Valve type	
							Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa	
							2.5	C315Q-H	4	C320Q-J	4	C325Q-J	
CQK..	1 Nm	■	-	-	24 V	15 s	CQKD24A ¹⁾	280	280	280	280	280	280
						75 s	CQK24A	280	280	280	280	280	280
						15 s	CQKD24A-MPL ¹⁾	280	280	280	280	280	280
						75 s	CQK24A-MPL	280	280	280	280	280	280
							CQKD230A ¹⁾	280	280	280	280	280	280
						15 s	CQK230A	280	280	280	280	280	280
						75 s	CQK230A	280	280	280	280	280	280
CQK..-T	1 Nm	■	-	-	24 V	75 s	CQK24A-T	280	280	280	280	280	280
							CQK24A-MPL-T	280	280	280	280	280	280
							CQK230A-T	280	280	280	280	280	280
							230 V						
										280	280	280	280
										280	280	280	280

¹⁾ Fast running actuators: observe the noise level according to the associated data sheet.
²⁾ Fail-safe actuator: The fail-safe position is NC (normally closed). The NO (normally open) version is available on request.

DN 15/20

Non fail-safe actuators


Field of use	Closed water circuit (pH >7)
Fluid temperature	2...90°C
Pipe connection	External thread G (ISO 228-1)
Leakage rate	Air-bubble tight, leakage rate A (EN 12266-1)
Flow characteristic	Equal percentage
Close-off pressure	Δp_s : 520 kPa
Max. differential pressure	Δp_{max} : 280 kPa
Permissible operating pressure	p_s : 1600 kPa

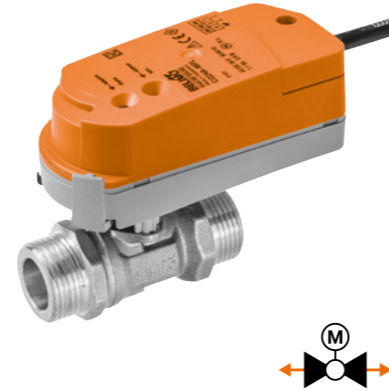

DN 15/20

Fail-safe actuators

Field of use	Closed water circuit (pH >7)
Fluid temperature	2...90°C
Pipe connection	External thread G (ISO 228-1)
Leakage rate	Air-bubble tight, leakage rate A (EN 12266-1)
Flow characteristic	Equal percentage
Close-off pressure	Δp_s : 520 kPa
Max. differential pressure	Δp_{max} : 280 kPa
Permissible operating pressure	p_s : 1600 kPa

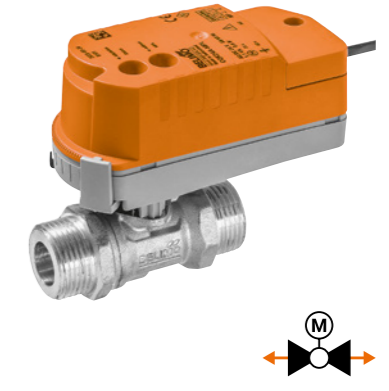

Suitable actuators	Nominal torque	Open/close	3-point	Modulating (2...10 V)	Modulating (0.5...10 V)	Communication MP-Bus	Communication Modbus	Communication BACnet	Nominal voltage AC/DC 24 V AC 230 V	Running time motor 90°	Actuator type	PN 25			
												DN 15		DN 20	
												K_{vs} [m³/h]	Valve type	K_{vs} [m³/h]	Valve type
												Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa
												0.4...4.5	C415Q-J	0.5...7.8	C420Q-K
Standard actuators															
CQ..	1 Nm	■	■	■	■	■	■	■	24 V	15 s	CQD24A ¹⁾	520	280	520	280
										75 s	CQ24A	520	280	520	280
										15 s	CQD24A-SR ¹⁾	520	280	520	280
										75 s	CQ24A-SR	520	280	520	280
										15 s	CQD24A-SZ ¹⁾	520	280	520	280
										75 s	CQ24A-SZ	520	280	520	280
										15 s	CQD24A-MPL ¹⁾	520	280	520	280
										75 s	CQ24A-MPL	520	280	520	280
										75 s	CQ24A-BAC	520	280	520	280
										15 s	CQD230A ¹⁾	520	280	520	280
230 V	35 s	CQC230A ¹⁾	520	280	520	280									
	75 s	CQ230A	520	280	520	280									
Standard actuators with connecting terminals															
CQ..-T	1 Nm	■	■	■	■	■	■	■	24 V	15 s	CQD24A-T ¹⁾	520	280	520	280
										75 s	CQ24A-T	520	280	520	280
										15 s	CQD24A-SR-T ¹⁾	520	280	520	280
										75 s	CQ24A-SR-T	520	280	520	280
										15 s	CQD24A-SZ-T ¹⁾	520	280	520	280
										75 s	CQ24A-SZ-T	520	280	520	280
										75 s	CQ24A-MPL-T	520	280	520	280
230 V	75 s	CQ230A-T	520	280	520	280									

¹⁾ Fast running actuators: observe the noise level according to the associated data sheet.

Suitable actuators	Nominal torque	Open/close	Modulating (2...10 V)	Modulating (0.5...10 V)	Communication MP-Bus	Nominal voltage AC/DC 24 V AC 230 V	Running time motor 90°	Actuator type	PN 25						
									DN 15		DN 20				
									K_{vs} [m³/h]	Valve type	K_{vs} [m³/h]	Valve type			
									Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa			
									0.4...4.5	C415Q-J	0.5...7.8	C420Q-K			
Fail-safe actuators NC/NO²⁾															
CQK..	1 Nm	■	■	■	■	■	24 V	15 s	CQKD24A ¹⁾	520	280	520	280		
								75 s	CQK24A	520	280	520	280		
								15 s	CQKD24A-SR ¹⁾	520	280	520	280		
								75 s	CQK24A-SR	520	280	520	280		
								15 s	CQKD24A-SZ.1 ¹⁾³⁾	520	280	520	280		
								75 s	CQK24A-SZ.1 ³⁾	520	280	520	280		
								75 s	CQK24A-MPL	520	280	520	280		
								230 V	15 s	CQKD230A ¹⁾	520	280	520	280	
									75 s	CQK230A	520	280	520	280	
								Fail-safe actuators NC/NO²⁾ with connecting terminals							
CQK..-T	1 Nm	■	■	■	■	■	24 V	75 s	CQK24A-T	520	280	520	280		
								75 s	CQK24A-SR-T	520	280	520	280		
								75 s	CQK24A-MPL-T	520	280	520	280		
230 V	75 s	CQK230A-T	520	280	520	280									

¹⁾ Fast running actuators: observe the noise level according to the associated data sheet.


²⁾ Fail-safe actuator: The fail-safe position is NC (normally closed). The NO (normally open) version is available on request.

³⁾ Actuator is delivered in multipack with 36 pieces.

DN 15/20

Non fail-safe actuators

Field of use	Closed water circuit (pH >7)
Fluid temperature	2...90°C
Pipe connection	External thread G (ISO 228-1)
Leakage rate	Air-bubble tight, leakage rate A (EN 12266-1)
Close-off pressure	Δp_s : 280 kPa
Max. differential pressure	Δp_{max} : 280 kPa
Permissible operating pressure	p_s : 1600 kPa

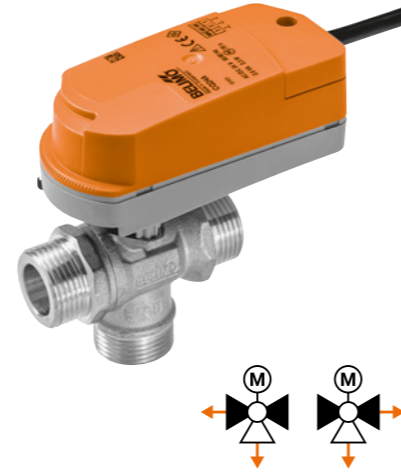


Suitable actuators	Nominal torque	Open/close	3-point	Communication MP-Bus	Communication Modbus	Communication BACnet	Nominal voltage AC/DC 24 V AC 230 V	Running time motor 90°	Actuator type	PN 25			
										DN 15		DN 20	
										K_{vs} [m³/h]	Valve type	K_{vs} [m³/h]	Valve type
										Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa
Standard actuators													
CQ..	1 Nm	■	■	—	—	—	24 V	15 s	CQD24A ¹⁾	280	280	280	280
								75 s	CQ24A	280	280	280	280
								15 s	CQD24A-MPL ¹⁾	280	280	280	280
								75 s	CQ24A-MPL	280	280	280	280
								75 s	CQ24A-BAC	280	280	280	280
								15 s	CQD230A ¹⁾	280	280	280	280
CQ..-T	1 Nm	■	■	—	—	—	230 V	35 s	CQC230A ¹⁾	280	280	280	280
								75 s	CQ230A	280	280	280	280
								15 s	CQD24A-T ¹⁾	280	280	280	280
CQ..-T	1 Nm	■	■	—	—	—	24 V	75 s	CQ24A-T	280	280	280	280
								75 s	CQ24A-MPL-T	280	280	280	280
								75 s	CQ230A-T	280	280	280	280

¹⁾ Fast running actuators: observe the noise level according to the associated data sheet.

DN 15/20

Fail-safe actuators

Field of use	Closed water circuit (pH >7)
Fluid temperature	2...90°C
Pipe connection	External thread G (ISO 228-1)
Leakage rate	Air-bubble tight, leakage rate A (EN 12266-1)
Close-off pressure	Δp_s : 280 kPa
Max. differential pressure	Δp_{max} : 280 kPa
Permissible operating pressure	p_s : 1600 kPa

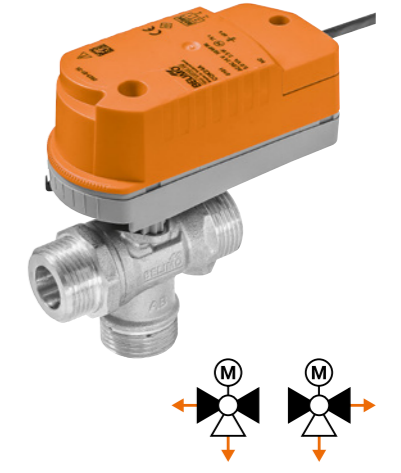

Suitable actuators	Nominal torque	Open/close	Communication MP-Bus	Nominal voltage AC/DC 24 V AC 230 V	Running time motor 90°	Actuator type	PN 25			
							DN 15		DN 20	
							K_{vs} [m³/h]	Valve type	K_{vs} [m³/h]	Valve type
							Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa
Fail-safe actuators NC/NO²⁾										
CQK..	1 Nm	■	—	24 V	15 s	CQKD24A ¹⁾	280	280	280	280
					75 s	CQK24A	280	280	280	280
					15 s	CQKD24A-MPL ¹⁾	280	280	280	280
					75 s	CQK24A-MPL	280	280	280	280
					15 s	CQKD230A ¹⁾	280	280	280	280
					75 s	CQK230A	280	280	280	280
CQK..-T	1 Nm	■	■	24 V	75 s	CQK24A-T	280	280	280	280
					75 s	CQK24A-MPL-T	280	280	280	280
					75 s	CQK230A-T	280	280	280	280


¹⁾ Fast running actuators: observe the noise level according to the associated data sheet.

²⁾ Fail-safe actuator: The fail-safe position is NC (normally closed). The NO (normally open) version is available on request.

DN 15...25

Non fail-safe actuators

Field of use	Closed water circuit (pH >7)
Fluid temperature	2...90°C
Pipe connection	Internal thread Rp (ISO 7-1)
Leakage rate	Air-bubble tight, leakage rate A (EN 12266-1)
Flow characteristic	Equal percentage
Close-off pressure	Δp_s : 1400 kPa
Max. differential pressure	Δp_{max} : 350 kPa
Permissible operating pressure	p_s : 1600 kPa

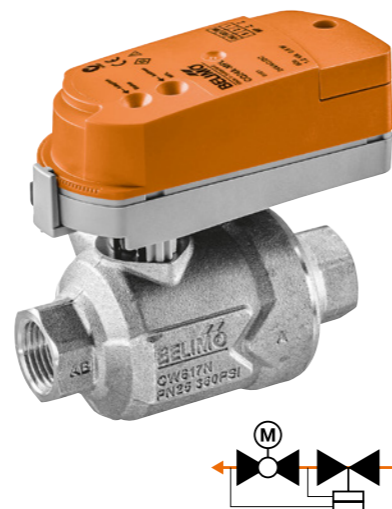

DN 15...25

Fail-safe actuators

Field of use	Closed water circuit (pH >7)
Fluid temperature	2...90°C
Pipe connection	Internal thread Rp (ISO 7-1)
Leakage rate	Air-bubble tight, leakage rate A (EN 12266-1)
Flow characteristic	Equal percentage
Close-off pressure	Δp_s : 1400 kPa
Max. differential pressure	Δp_{max} : 350 kPa
Permissible operating pressure	p_s : 1600 kPa



Suitable actuators	Nominal torque	Open/close	3-point	Modulating (2...10 V)	Modulating (0.5...10 V)	Communication MP-Bus	Communication Modbus	Communication BACnet	Nominal voltage AC/DC 24 V AC 230 V	Running time motor 90°	Actuator type	PN 25					
												DN 15		DN 20		DN 25	
												V_{nom} [l/h]	Valve type	V_{nom} [l/h]	Valve type	V_{nom} [l/h]	Valve type
CQ..	1 Nm	-	-	-	-	-	-	-	24 V	15 s	CQD24A ¹⁾	1400	350	1400	350	1400	350
										75 s	CQ24A	1400	350	1400	350	1400	350
										15 s	CQD24A-SR ¹⁾	1400	350	1400	350	1400	350
										75 s	CQ24A-SR	1400	350	1400	350	1400	350
										15 s	CQD24A-SZ ¹⁾	1400	350	1400	350	1400	350
										75 s	CQ24A-SZ	1400	350	1400	350	1400	350
	230 V	15 s	CQD24A-MPL ¹⁾	1400	350	1400	350	1400	350								
		75 s	CQ24A-MPL	1400	350	1400	350	1400	350								
		75 s	CQ24A-BAC	1400	350	1400	350	1400	350								
		15 s	CQD230A ¹⁾	1400	350	1400	350	1400	350								
		35 s	CQC230A ¹⁾	1400	350	1400	350	1400	350								
		75 s	CQ230A	1400	350	1400	350	1400	350								
CQ..-T	1 Nm	-	-	-	-	-	-	-	24 V	15 s	CQD24A-T ¹⁾	1400	350	1400	350	1400	350
										75 s	CQ24A-T	1400	350	1400	350	1400	350
										15 s	CQD24A-SR-T ¹⁾	1400	350	1400	350	1400	350
										75 s	CQ24A-SR-T	1400	350	1400	350	1400	350
										15 s	CQD24A-SZ-T ¹⁾	1400	350	1400	350	1400	350
										75 s	CQ24A-SZ-T	1400	350	1400	350	1400	350
	230 V	75 s	CQ24A-MPL-T	1400	350	1400	350	1400	350								
		75 s	CQ230A-T	1400	350	1400	350	1400	350								

¹⁾ Fast running actuators: observe the noise level according to the associated data sheet.



Suitable actuators	Nominal torque	Open/close	Modulating (2...10 V)	Modulating (0.5...10 V)	Communication MP-Bus	Nominal voltage AC/DC 24 V AC 230 V	Running time motor 90°	Actuator type	PN 25							
									DN 15		DN 20		DN 25			
									V_{nom} [l/h]	Valve type	V_{nom} [l/h]	Valve type	V_{nom} [l/h]	Valve type		
CQK..	1 Nm	-	-	-	-	24 V	15 s	CQKD24A ¹⁾	1400	350	1400	350	1400	350		
							75 s	CQK24A	1400	350	1400	350	1400	350		
							15 s	CQKD24A-SR ¹⁾	1400	350	1400	350	1400	350		
							75 s	CQK24A-SR	1400	350	1400	350	1400	350		
							15 s	CQKD24A-SZ.1 ^{1) 3)}	1400	350	1400	350	1400	350		
							75 s	CQK24A-SZ	1400	350	1400	350	1400	350		
	230 V	15 s	CQKD24A-MPL ¹⁾	1400	350	1400	350	1400	350							
		75 s	CQK24A-MPL	1400	350	1400	350	1400	350							
		15 s	CQKD230A ¹⁾	1400	350	1400	350	1400	350							
		75 s	CQK230A	1400	350	1400	350	1400	350							
		CQK..-T	1 Nm	-	-	-	-	24 V	75 s	CQK24A-T	1400	350	1400	350	1400	350
									75 s	CQK24A-SR-T	1400	350	1400	350	1400	350
75 s	CQK24A-MPL-T								1400	350	1400	350	1400	350		
75 s	CQK230A-T								1400	350	1400	350	1400	350		

¹⁾ Fast running actuators: observe the noise level according to the associated data sheet.
²⁾ Fail-safe actuator: The fail-safe position is NC (normally closed). The NO (normally open) version is available on request.
³⁾ Actuator is delivered in multipack with 36 pieces.

DN 15...25

Non fail-safe actuators

Field of use	Closed water circuit (pH >7)
Fluid temperature	2...60°C
Pipe connection	Internal thread Rp (ISO 7-1)
Leakage rate	Air-bubble tight, leakage rate A (EN 12266-1)
Close-off pressure	Δp_s : 520 kPa
Max. differential pressure	Δp_{max} : 280 kPa
Permissible operating pressure	p_s : 1600 kPa

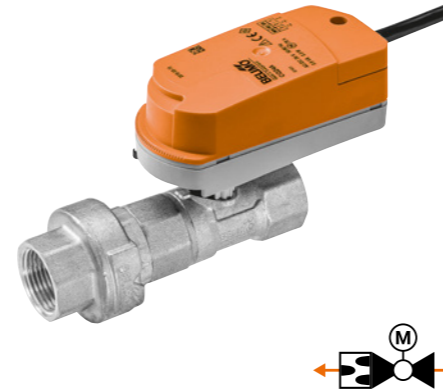



Suitable actuators	Nominal torque	Open/close	3-point	Communication MP-Bus	Communication Modbus	Communication BACnet	Nominal voltage AC/DC 24 V AC 230 V	Running time motor 90°	Actuator type	PN 25							
										DN 15		DN 20		DN 25			
										V'_{nom} [l/h]	Valve type	V'_{nom} [l/h]	Valve type	V'_{nom} [l/h]	Valve type		
Standard actuators											Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa	
CQ..	1 Nm	■	■	—	—	—	24 V	15 s	CQD24A ¹⁾	290	C215QFL-C	1200	C220QFL-F6	—	—	—	—
		■	■	—	—	—	24 V	75 s	CQ24A	470	C215QFL-D	1500	C220QFL-G0	—	—	—	—
		—	■	—	—	—	24 V	15 s	CQD24A-MPL ¹⁾	650	C215QFL-E	1900	C220QFL-G	—	—	—	—
		—	—	■	—	—	24 V	75 s	CQ24A-MPL	940	C215QFL-F0	2350	C220QFL-H0	—	—	—	—
		■	■	—	■	■	230 V	15 s	CQ24A-BAC	1300	C215QFL-F	2900	C220QFL-H	3600	R225FL-J	—	—
		■	■	—	—	—	230 V	35 s	CQD230A ¹⁾								
		■	■	—	—	—	230 V	75 s	CQC230A ¹⁾								
LR..	5 Nm	■	■	—	—	—	24 V	90 s	LR24A							520	280
		■	■	—	—	—	230 V	90 s	LR230A							520	280
Standard actuators with connecting terminals																	
CQ..-T	1 Nm	■	■	—	—	—	24 V	15 s	CQD24A-T ¹⁾	290	C215QFL-C	1200	C220QFL-F6	—	—	—	—
		■	■	—	—	—	24 V	75 s	CQ24A-T	470	C215QFL-D	1500	C220QFL-G0	—	—	—	—
		—	■	—	—	—	24 V	15 s	CQD24A-MPL-T ¹⁾	650	C215QFL-E	1900	C220QFL-G	—	—	—	—
		—	—	■	—	—	24 V	75 s	CQ24A-MPL-T	940	C215QFL-F0	2350	C220QFL-H0	—	—	—	—
		■	■	—	—	—	230 V	15 s	CQD230A-T	1300	C215QFL-F	2900	C220QFL-H	3600	R225FL-J	—	—
		■	■	—	—	—	24 V	35 s	CQD230A-T								
		■	■	—	—	—	230 V	75 s	CQC230A-T								
	5 Nm	■	■	—	—	—	24 V	90 s	LR24A-TP							520	280
		■	■	—	—	—	230 V	90 s	LR230A-TP							520	280

¹⁾ Fast running actuators: observe the noise level according to the associated data sheet.

DN 15...25

Fail-safe actuators

Field of use	Closed water circuit (pH >7)
Fluid temperature	2...60°C
Pipe connection	Internal thread Rp (ISO 7-1)
Leakage rate	Air-bubble tight, leakage rate A (EN 12266-1)
Close-off pressure	Δp_s : 520 kPa
Max. differential pressure	Δp_{max} : 280 kPa
Permissible operating pressure	p_s : 1600 kPa

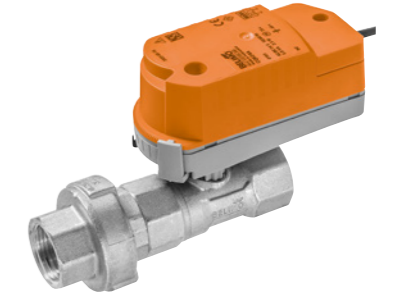


Suitable actuators	Nominal torque	Open/close	Communication MP-Bus	Nominal voltage AC/DC 24 V AC 230 V	Running time motor 90°	Actuator type	PN 25							
							DN 15		DN 20		DN 25			
							V'_{nom} [l/h]	Valve type	V'_{nom} [l/h]	Valve type	V'_{nom} [l/h]	Valve type		
Fail-safe actuators NC/NO²⁾							Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa		
CQK..	1 Nm	■	—	—	15 s	CQKD24A ¹⁾	290	C215QFL-C	1200	C220QFL-F6	—	—	—	
		■	—	—	75 s	CQK24A	470	C215QFL-D	1500	C220QFL-G0	—	—	—	
		—	■	—	15 s	CQKD24A-MPL ¹⁾	650	C215QFL-E	1900	C220QFL-G	—	—	—	
		—	—	■	75 s	CQK24A-MPL	940	C215QFL-F0	2350	C220QFL-H0	—	—	—	
LRF..	4 Nm	■	—	230 V	15 s	CQKD230A ¹⁾	1300	C215QFL-F	2900	C220QFL-H	3600	R225FL-J	—	
		■	—	24 V	75 s	CQK230A							520	280
		■	—	230 V	75 s	LRF24							520	280
		■	—	230 V	75 s	LRF230							520	280
Fail-safe actuators NC/NO²⁾ with connecting terminals														
CQK...-T	1 Nm	■	—	24 V	75 s	CQK24A-T	290	C215QFL-C	1200	C220QFL-F6	—	—	—	
		■	—	24 V	75 s	CQK24A-MPL-T	470	C215QFL-D	1500	C220QFL-G0	—	—	—	
		■	—	230 V	75 s	CQK230A-T	650	C215QFL-E	1900	C220QFL-G	—	—	—	

¹⁾ Fast running actuators: observe the noise level according to the associated data sheet.

²⁾ Fail-safe actuator: The fail-safe position is NC (normally closed). The NO (normally open) version is available on request.

DN 15

Field of use	Closed water circuit (pH >7)
Fluid temperature	6...80°C
Pipe connection	Internal thread Rp (ISO 7-1)
Leakage rate	Air-bubble tight, leakage rate A (EN 12266-1)
Flow characteristic	Linear: Sequence I: 0...30° Dead zone: 30...60° Sequence II: 60...90°
Close-off pressure	Δp_s : 350 kPa
Max. differential pressure	Δp_{max} : 100 kPa
Permissible operating pressure	p_s : 1600 kPa

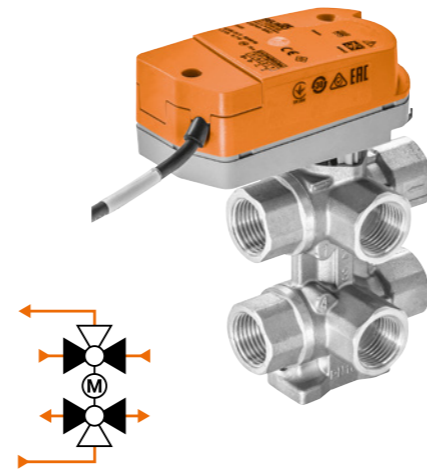

Suitable actuators


	Nominal torque	Modulating (2...10 V)	Modulating (0.5...10 V)	Communication MP-Bus	Communication Modbus	Communication BACnet	Nominal voltage AC/DC 24 V	Running time motor 90°	Actuator type
Standard actuators									
CQ..	1 Nm	■	■	■	■	■	24 V	75 s	CQ24A-SR CQ24A-SZ CQ24A-MPL CQ24A-BAC
Standard actuators with connecting terminals									
CQ..-T	1 Nm	■	■	■	■	■	24 V	75 s	CQ24A-SR-T CQ24A-SZ-T CQ24A-MPL-T



PN 16				PN 16			
DN 15				DN 15			
K_{vs} [m³/h] Sequence I	K_{vs} [m³/h] Sequence II	Valve type		K_{vs} [m³/h] Sequence I	K_{vs} [m³/h] Sequence II	Valve type	
0.25	0.25	R3015-P25-P25-B1		0.25	0.25	R3015-P4-P25-B1	
0.4	0.4	R3015-P25-P4-B1		0.4	0.4	R3015-P4-P4-B1	
0.63	0.63	R3015-P25-P63-B1		0.63	0.63	R3015-P4-P63-B1	
			Δp_s kPa				Δp_{max} kPa
			350				100
			350				100
			350				100
			350				100
			350				100

DN 15

Field of use Closed water circuit (pH >7)
 Fluid temperature 6...80°C
 Pipe connection Internal thread Rp (ISO 7-1)
 Leakage rate Air-bubble tight, leakage rate A (EN 12266-1)
 Flow characteristic Linear: Sequence I: 0...30°
 Dead zone: 30...60°
 Sequence II: 60...90°
 Close-off pressure Δp_s : 350 kPa
 Max. differential pressure Δp_{max} : 100 kPa
 Permissible operating pressure p_s : 1600 kPa

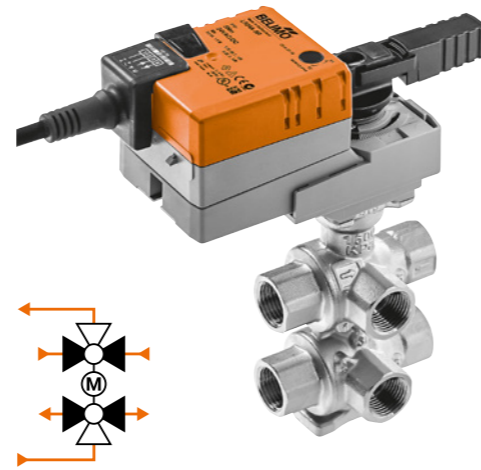


		PN 16								PN 16																											
		DN 15				DN 15				DN 15				DN 15																							
		K_{vs} [m³/h] Se- quence I	K_{vs} [m³/h] Se- quence II	Valve type	K_{vs} [m³/h] Se- quence I	K_{vs} [m³/h] Se- quence II	Valve type	K_{vs} [m³/h] Se- quence I	K_{vs} [m³/h] Se- quence II	Valve type	K_{vs} [m³/h] Se- quence I	K_{vs} [m³/h] Se- quence II	Valve type	K_{vs} [m³/h] Se- quence I	K_{vs} [m³/h] Se- quence II	Valve type																					
Suitable actuators	Nominal torque																																				
	Modulating (2...10 V)																																				
	Modulating (0.5...10 V)																																				
	Communication MP-Bus																																				
	Communication Modbus																																				
	Communication BACnet																																				
	Communication KNX																																				
	Nominal voltage AC/DC 24 V																																				
	Running time motor 90°																																				
	Actuator type																																				
		0.25	0.4	0.63	1	1.3	1.8	0.25	0.4	0.63	1	1.3	1.8	0.25	0.4	0.63	1	1.3	1.8																		
		R3015-P25-P25-B2	R3015-P25-P4-B2	R3015-P25-P63-B2	R3015-P25-1-B2	R3015-P25-1P3-B2	R3015-P25-1P8-B2	R3015-P4-P25-B2	R3015-P4-P4-B2	R3015-P4-P63-B2	R3015-P4-1-B2	R3015-P4-1P3-B2	R3015-P4-1P8-B2	R3015-P63-P25-B2	R3015-P63-P4-B2	R3015-P63-P63-B2	R3015-P63-1-B2	R3015-P63-1P3-B2	R3015-P63-1P8-B2	R3015-1-P25-B2	R3015-1-P4-B2	R3015-1-P63-B2	R3015-1-1-B2	R3015-1-1P3-B2	R3015-1-1P8-B2	R3015-1P3-P25-B2	R3015-1P3-P4-B2	R3015-1P3-P63-B2	R3015-1P3-1-B2	R3015-1P3-1P3-B2	R3015-1P3-1P8-B2	R3015-1P8-P25-B2	R3015-1P8-P4-B2	R3015-1P8-P63-B2	R3015-1P8-1-B2	R3015-1P8-1P3-B2	R3015-1P8-1P8-B2
		Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa		
	Standard actuators																																				
LR..	5 Nm	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
		LR24A-SR	LR24A-SZ	LR24A-MP ¹⁾	LR24A-MOD	LR24A-KNX	VLR24A-LP1	LR24A-SR-TP	LR24A-SZ-TP	LR24A-MP-TP ¹⁾								LR24A-SR-TP	LR24A-SZ-TP	LR24A-MP-TP ¹⁾																	
VLR..	5 Nm	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
LR..-T	5 Nm	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	

¹⁾ Control, operating range, feedback, running time, and other functions configurable on MP types with Belimo Assistant 2.

DN 20

- Field of use: Closed water circuit (pH >7)
- Fluid temperature: 6...80°C
- Pipe connection: Internal thread Rp (ISO 7-1)
- Leakage rate: Air-bubble tight, leakage rate A (EN 12266-1)
- Flow characteristic: Linear: Sequence I: 0...30°
Dead zone: 30...60°
Sequence II: 60...90°
- Close-off pressure: Δp_s : 350 kPa
- Max. differential pressure: Δp_{max} : 100 kPa
- Permissible operating pressure: p_s : 1600 kPa

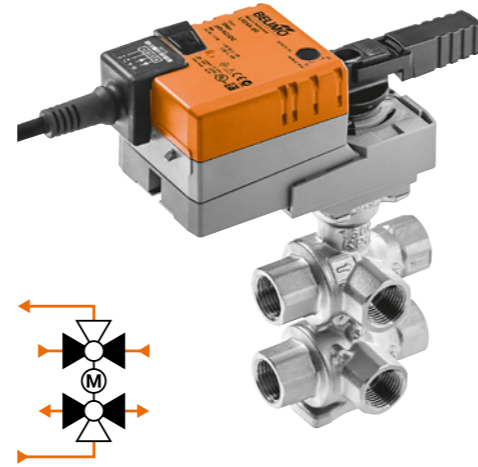


Suitable actuators	Nominal torque	Modulating (2...10 V)	Modulating (0.5...10 V)	Communication MP-Bus	Communication Modbus	Communication BACnet	Communication KNX	Nominal voltage AC/DC 24 V	Running time motor 90°	Actuator type	PN 16				PN 16																
											DN 20				DN 20																
											K_{vs} [m³/h] Sequence I	K_{vs} [m³/h] Sequence II	Valve type	Δp_s kPa	Δp_{max} kPa	K_{vs} [m³/h] Sequence I	K_{vs} [m³/h] Sequence II	Valve type	Δp_s kPa	Δp_{max} kPa	K_{vs} [m³/h] Sequence I	K_{vs} [m³/h] Sequence II	Valve type	Δp_s kPa	Δp_{max} kPa						
											0.63	1.6	2.5	4	1	1.6	2.5	4	1.6	2.5	4	2.5	4	4	2.5	4					
Standard actuators												0.63	1.6	R3020-P63-1P6-B2	350	100	1	1.6	R3020-1-1P6-B2	350	100	0.63	1.6	R3020-2P5-P63-B2	350	100	4	1.6	R3020-4-1P6-B2	350	100
LR..												1	2.5	R3020-P63-2P5-B2	350	100	1	2.5	R3020-1-2P5-B2	350	100	1	2.5	R3020-2P5-1-B2	350	100	1	2.5	R3020-4-1-B2	350	100
5 Nm												4	4	R3020-P63-4-B2	350	100	4	4	R3020-1-4-B2	350	100	4	4	R3020-2P5-4-B2	350	100	4	4	R3020-4-4-B2	350	100
Standard actuators with connecting terminals												0.63	1.6	R3020-P63-1P6-B2	350	100	1	1.6	R3020-1-1P6-B2	350	100	0.63	1.6	R3020-2P5-P63-B2	350	100	4	1.6	R3020-4-1P6-B2	350	100
VLR..												1	2.5	R3020-P63-2P5-B2	350	100	1	2.5	R3020-1-2P5-B2	350	100	1	2.5	R3020-2P5-1-B2	350	100	1	2.5	R3020-4-1-B2	350	100
5 Nm												4	4	R3020-P63-4-B2	350	100	4	4	R3020-1-4-B2	350	100	4	4	R3020-2P5-4-B2	350	100	4	4	R3020-4-4-B2	350	100
Standard actuators with connecting terminals												0.63	1.6	R3020-P63-1P6-B2	350	100	1	1.6	R3020-1-1P6-B2	350	100	0.63	1.6	R3020-2P5-P63-B2	350	100	4	1.6	R3020-4-1P6-B2	350	100
LR..-T												1	2.5	R3020-P63-2P5-B2	350	100	1	2.5	R3020-1-2P5-B2	350	100	1	2.5	R3020-2P5-1-B2	350	100	1	2.5	R3020-4-1-B2	350	100
5 Nm												4	4	R3020-P63-4-B2	350	100	4	4	R3020-1-4-B2	350	100	4	4	R3020-2P5-4-B2	350	100	4	4	R3020-4-4-B2	350	100



¹⁾ Control, operating range, feedback, running time, and other functions are adjustable on MP types with Belimo Assistant 2


DN 25

Field of use	Closed water circuit (pH >7)
Fluid temperature	6...80°C
Pipe connection	Internal thread Rp (ISO 7-1)
Leakage rate	Air-bubble tight, leakage rate A (EN 12266-1)
Flow characteristic	Linear: Sequence I: 0...30° Dead zone: 30...60° Sequence II: 60...90°
Close-off pressure	Δp_s : 350 kPa
Max. differential pressure	Δp_{max} : 100 kPa
Permissible operating pressure	p_s : 1600 kPa

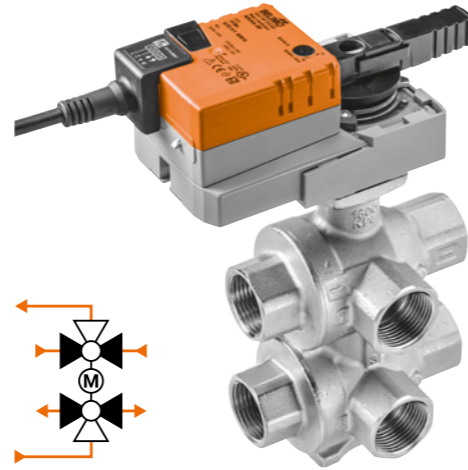

DN 15/20

Field of use	Closed water circuit (pH >7)
Fluid temperature	6...80°C
Pipe connection	Internal thread Rp (ISO 7-1)
Leakage rate	Air-bubble tight, leakage rate A (EN 12266-1)
Flow characteristic	Linear
Close-off pressure	Δp_s : 350 kPa
Max. differential pressure	Δp_{max} : 110 kPa
Permissible operating pressure	p_s : 1600 kPa
V'_{max}	Freely adjustable 5...100% of V'_{nom}
Control, operating range, feedback, running time, and other functions configurable with Belimo Assistant 2 and ZTH EU	

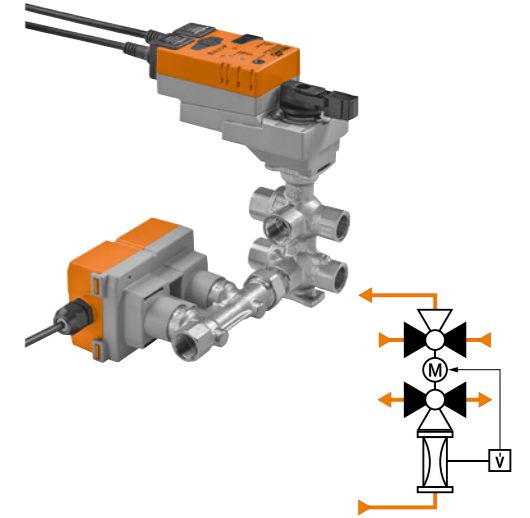

Suitable actuators	Nominal torque	Modulating (2...10 V)	Modulating (0.5...10 V)	Communication MP-Bus	Communication Modbus	Communication BACnet	Communication KNX	Nominal voltage AC/DC 24 V	Running time motor 90°	Actuator type	PN 16			
											DN 25			
											K_{vs} Sequence I	K_{vs} Sequence II	Valve type	
											6.3	6.3	R3025-6P3-6P3-B3	
											Δp_s kPa		Δp_{max} kPa	
NR..	Standard actuators													
			■								NR24A-SR	350	100	
			■								NR24A-SZ	350	100	
		10 Nm			■				24 V	90 s	NR24A-MP ¹⁾	350	100	
					■	■					NR24A-MOD	350	100	
VNR..							■				NR24A-KNX	350	100	
							■				VNR24A-LP1	350	100	
Standard actuators with connecting terminals														
NR..-TP	10 Nm	■						24 V	90 s	NR24A-SR-TP	350	100		

¹⁾ Control, operating range, feedback, running time, and other functions are adjustable on MP types with Belimo Assistant 2

PN	DN	V'_{nom} [l/h]	V'_{max} low-noise [l/h]	Nominal voltage AC/DC 24 V	Modulating (2...10 V, variable)	Communication MP-Bus	Communication BACnet	Communication Modbus	Valve type with actuator	Δp_s kPa	Δp_{max} kPa
16	15	1260	840	24 V	■	■	■	■	EP015R-R6+BAC	350	110
	20	2340	1620		■	■	■	■	EP020R-R6+BAC		

The EP..R-R6+BAC valve types will be replaced over the course of the year by the new EP..R6+BAC types.


2...12 zones





Materials Manifold: stainless steel
Valve body: brass

Operating pressure 6 bar

Flow setting 0...5 l/min

Connection G 1" (ISO 228)
G 3/4" Euro cone



Suitable actuators	Nominal torque	Open/close	3-point	Modulating (2...10 V)	Modulating (0.5...10 V)	Communication MP-Bus	Communication BACnet	Communication Modbus	Fail-safe	Nominal voltage AC/DC 24 V AC 230 V	Running time motor 90°	Actuator type	Manifold type														
													EM-ECQ-02F	EM-ECQ-03F	EM-ECQ-04F	EM-ECQ-05F	EM-ECQ-06F	EM-ECQ-07F	EM-ECQ-08F	EM-ECQ-09F	EM-ECQ-10F	EM-ECQ-11F	EM-ECQ-12F				
Standard actuators																											
CQ.. 	1 Nm	—	—	—	—	—	—	—	—	24 V	75 s	CQ24A	■	■	■	■	■	■	■	■	■	■	■				
												CQ24A-SR	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
												CQ24A-SZ	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
												CQ24A-MPL	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
												CQ24A-BAC	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
												CQ230A	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Standard actuators with connecting terminals																											
CQ..A-T 	1 Nm	—	—	—	—	—	—	—	—	24 V	75 s	CQ24A-T	■	■	■	■	■	■	■	■	■	■	■				
												CQ24A-SR-T	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
												CQ24A-SZ-T	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
												CQ230A-T	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Fail-safe actuators NC/NO																											
CQK.. 	1 Nm	—	—	—	—	—	—	—	—	24 V	75 s	CQK24A	■	■	■	■	■	■	■	■	■	■	■				
												CQK24A-SR	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
												CQK24A-SZ.1 ¹⁾	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
												CQK24A-MPL	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
												CQK230A	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Fail-safe actuators NC/NO with connecting terminals																											
CQK..A-T 	1 Nm	—	—	—	—	—	—	—	—	24 V	75 s	CQK24A-T	■	■	■	■	■	■	■	■	■	■	■				
												CQK24A-SR-T	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
												CQK24A-MPL-T	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
												CQK230A-T	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■

¹⁾ Actuator is delivered in multipack with 36 pieces.



5

Pressure-independent characterised control valves

Complete transparency and highest efficiency



Belimo Energy Valve™

	Internal and external thread	2-way	PN 25	DN 15...50	30
				DN 15...50 (MID)	31
		3-way		DN 15...50	32
	Flange	2-way	PN 16	DN 65...150	33
Electronic pressure-independent characterised control valve (EPIV)	Internal and external thread	2-way	PN 25	DN 15...50	34
	Flange		PN 16	DN 65...150	35

Please refer to the data sheets or notes for project planning for further technical data to be observed.



DN 15...50

Field of use Closed water circuit (pH >7)
 Fluid temperature -10...120°C
 Pipe connection Internal thread Rp (ISO 7-1) and External thread G (ISO 228-1)
 Leakage rate Air-bubble tight, leakage rate A (EN 12266-1)
 Permissible operating pressure p_s : 1600 kPa
 V'_{max} Freely adjustable 25...100% of V'_{nom}
 Configurable using the integrated web server or Belimo Assistant 2
 Optional connection to the Belimo Cloud
 Sensor-operated flow rate, power or differential pressure control
 Delta-T manager for optimal differential temperatures

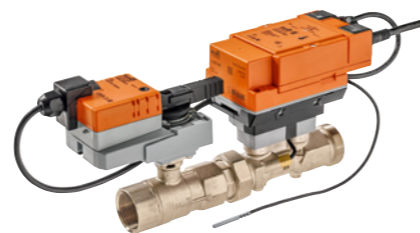

DN 15...50 (MID)

Field of use Closed water circuit (pH >7)
 Fluid temperature -10...120°C
 Fluid temperature note MID-certified 15...120°C
 Pipe connection Internal thread Rp (ISO 7-1) and External thread G (ISO 228-1)
 Leakage rate Air-bubble tight, leakage rate A (EN 12266-1)
 Permissible operating pressure p_s : 1600 kPa
 V'_{max} Freely adjustable 25...100% of V'_{nom}
 The thermal energy meters meet the requirements of EN 1434 and have type approval according to the European Measuring Instruments Directive 2014/32/EU (MI-004) as a heat meter.
 Configurable using the integrated web server or Belimo Assistant 2
 Optional connection to the Belimo Cloud
 Sensor-operated flow rate, power or differential pressure control
 Delta-T manager for optimal differential temperatures

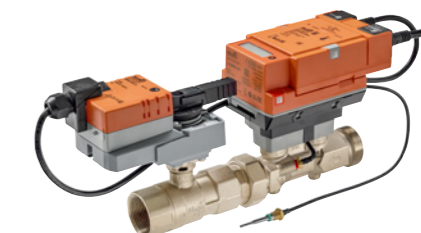

PN	DN	G	Rp	V'_{nom} [l/s]	V'_{nom} [l/min]	V'_{nom} [m³/h]	Nominal voltage AC/DC 24 V	Modulating (2...10 V, variable)	Communication MP-Bus	Communication Modbus	Communication BACnet	Glycol monitoring ¹⁾	Valve type with actuator	Δp_s kPa	Δp_{max} kPa
With standard actuator															
25	15	3/4"	1/2"	0.42	25	1.5	24 V	■	■	■	■	■	EV015R2+BAC	1400	350
	20	1"	3/4"	0.69	41.7	2.5		■	■	■	■	■	EV020R2+BAC	1400	350
	25	1 1/4"	1"	0.97	58.3	3.5		■	■	■	■	■	EV025R2+BAC	1400	350
	32	1 1/2"	1 1/4"	1.67	100	6		■	■	■	■	■	EV032R2+BAC	1400	350
	40	2"	1 1/2"	2.78	166.7	10		■	■	■	■	■	EV040R2+BAC	1400	350
	50	2 1/2"	2"	4.17	250	15		■	■	■	■	■	EV050R2+BAC	1400	350
Fail-safe															
25	15	3/4"	1/2"	0.42	25	1.5	24 V	■	■	■	■	■	EV015R2+KBAC	1400	350
	20	1"	3/4"	0.69	41.7	2.5		■	■	■	■	■	EV020R2+KBAC	1400	350
	25	1 1/4"	1"	0.97	58.3	3.5		■	■	■	■	■	EV025R2+KBAC	1400	350
	32	1 1/2"	1 1/4"	1.67	100	6		■	■	■	■	■	EV032R2+KBAC	1400	350
	40	2"	1 1/2"	2.78	166.7	10		■	■	■	■	■	EV040R2+KBAC	1400	350
	50	2 1/2"	2"	4.17	250	15		■	■	■	■	■	EV050R2+KBAC	1400	350


¹⁾ Optimum heat transfer can be ensured by glycol content monitoring.



PN	DN	G	Rp	V'_{nom} [l/s]	V'_{nom} [l/min]	V'_{nom} [m³/h]	Nominal voltage AC/DC 24 V	Modulating (2...10 V, variable)	Communication MP-Bus	Communication Modbus	Communication BACnet	Valve type with actuator	Δp_s kPa	Δp_{max} kPa	
With standard actuator															
25	15	3/4"	1/2"	0.42	25	1.5	24 V	■	■	■	■	EV015R2+MID	1400	350	
	20	1"	3/4"	0.69	41.7	2.5		■	■	■	■	■	EV020R2+MID	1400	350
	25	1 1/4"	1"	0.97	58.3	3.5		■	■	■	■	■	EV025R2+MID	1400	350
	32	1 1/2"	1 1/4"	1.67	100	6		■	■	■	■	■	EV032R2+MID	1400	350
	40	2"	1 1/2"	2.78	166.7	10		■	■	■	■	■	EV040R2+MID	1400	350
	50	2 1/2"	2"	4.17	250	15		■	■	■	■	■	EV050R2+MID	1400	350

DN 15...50

- Field of use: Closed water circuit (pH >7)
- Fluid temperature: -10...120°C
- Pipe connection: Internal thread Rp (ISO 7-1) and External thread G (ISO 228-1)
- Leakage rate: Control path A – AB: air-bubble tight, leakage rate A (EN 12266-1) / bypass B – AB: leakage class I
- Permissible operating pressure: p_s: 1600 kPa
- V_{max}: Freely adjustable 25...100% of V_{nom}
- Configurable using the integrated web server or Belimo Assistant 2
- Optional connection to the Belimo Cloud
- Sensor-operated flow or power control
- Delta-T manager for optimal differential temperatures

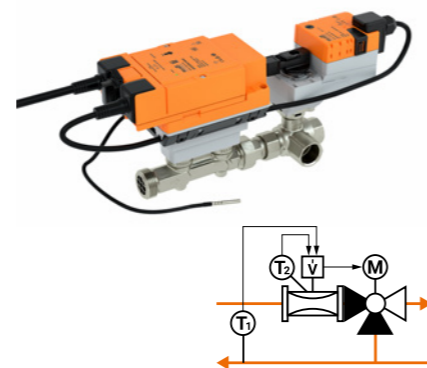


PN	DN	G	Rp	V _{nom} [l/s]	V _{nom} [l/min]	V _{nom} [m ³ /h]	Nominal voltage AC/DC 24 V	Modulating (2...10 V, variable)	Communication MP-Bus	Communication Modbus	Communication BA Cnet	Glycol monitoring ¹⁾	Valve type with actuator	Δp _s kPa	Δp _{max} kPa	
With standard actuator																
25	15	3/4"	1/2"	0.42	25	1.5	24 V	■	■	■	■	■	EV015R3+BAC	1400	350	
	20	1"	3/4"	0.69	41.7	2.5		■	■	■	■	■	■	EV020R3+BAC	1400	350
	25	1 1/4"	1"	0.97	58.3	3.5		■	■	■	■	■	■	EV025R3+BAC	1400	350
	32	1 1/2"	1 1/4"	1.67	100	6		■	■	■	■	■	■	EV032R3+BAC	1400	350
	40	2"	1 1/2"	2.78	166.7	10		■	■	■	■	■	■	EV040R3+BAC	1400	350
	50	2 1/2"	2"	4.17	250	15		■	■	■	■	■	■	EV050R3+BAC	1400	350

¹⁾ Optimum heat transfer can be ensured by glycol content monitoring.

Note: 3-way Belimo Energy Valve™ with MID on request.

DN 65...150

- Field of use: Closed water circuit (pH >7)
- Fluid temperature: -10...120°C
- Pipe connection: Flange PN 16 (EN 1092-2)
- Leakage rate: Air-bubble tight, leakage rate A (EN 12266-1)
- Permissible operating pressure: p_s: 1600 kPa
- V_{max}: Freely adjustable 30...100% of V_{nom}
- Completely parametrisable by means of integrated web server
- Optional connection to the Belimo Cloud
- Sensor-operated flow or power control
- Delta-T manager for optimal differential temperatures

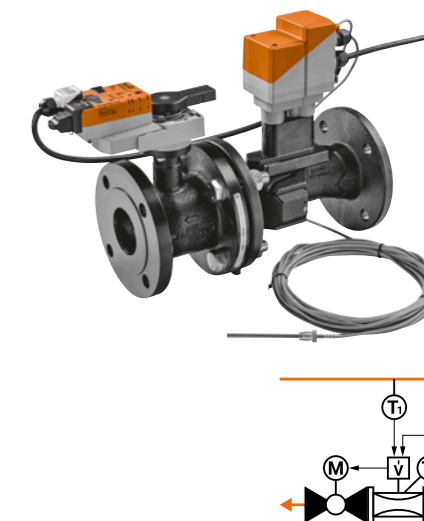


PN	DN	V _{nom} [l/s]	V _{nom} [l/min]	V _{nom} [m ³ /h]	Nominal voltage AC/DC 24 V	Modulating (2...10 V, variable)	Communication MP-Bus	Communication Modbus	Communication BA Cnet	Glycol monitoring ¹⁾	Valve type with actuator	Δp _s kPa	Δp _{max} kPa	
With standard actuator														
16	65	8	480	28.8	24 V	■	■	■	■	■	EV065F+BAC	690	340	
	80	11	660	39.6		■	■	■	■	■	■	EV080F+BAC	690	340
	100	20	1200	72		■	■	■	■	■	■	EV100F+BAC	690	340
	125	31	1860	111.6		■	■	■	■	■	■	EV125F+BAC	690	340
	150	45	2700	162		■	■	■	■	■	■	EV150F+BAC	690	340
	Fail-safe													
16	65	8	480	28.8	24 V	■	■	■	■	■	EV065F+KBAC	690	340	
	80	11	660	39.6		■	■	■	■	■	■	EV080F+KBAC	690	340
	100	20	1200	72		■	■	■	■	■	■	EV100F+KBAC	690	340
	125	31	1860	111.6		■	■	■	■	■	■	EV125F+KBAC	690	340
	150	45	2700	162		■	■	■	■	■	■	EV150F+KBAC	690	340

¹⁾ Optimum heat transfer can be ensured by glycol content monitoring.


DN 15...50

Field of use Closed water circuit (pH >7)
 Fluid temperature -10...120°C
 Pipe connection Internal thread Rp (ISO 7-1) and External thread G (ISO 228-1)
 Leakage rate Air-bubble tight, leakage rate A (EN 12266-1)
 Permissible operating pressure p_s : 1600 kPa
 V'_{max} Freely adjustable 25...100% of V'_{nom}
 Control, operating range, feedback, and other functions configurable with Belimo Assistant 2

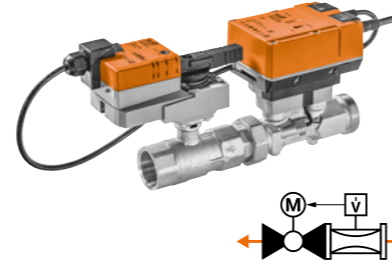

DN 65...150

Field of use Closed water circuit (pH >7)
 Fluid temperature -10...120°C
 Pipe connection Flange PN 16 (EN 1092-2)
 Leakage rate Air-bubble tight, leakage rate A (EN 12266-1)
 Permissible operating pressure p_s : 1600 kPa
 V'_{max} Freely adjustable 30...100% of V'_{nom}
 Control, operating range, feedback, and other functions configurable with Belimo Assistant 2

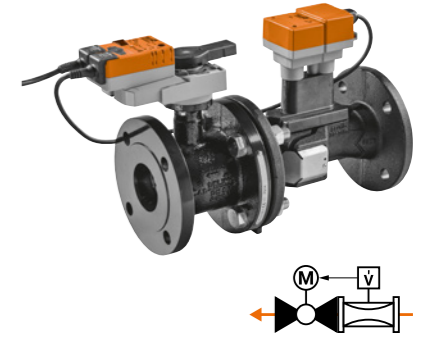

PN	DN	G	Rp	V'_{nom} [l/s]	V'_{nom} [l/min]	V'_{nom} [m³/h]	Nominal voltage AC/DC 24 V	Modulating (2...10 V, variable)	Communication MP-Bus	Communication Modbus	Communication BACnet	Glycol monitoring ¹⁾	Valve type with actuator	Δp_s kPa	Δp_{max} kPa	
With standard actuator																
25	15	3/4"	1/2"	0.42	25	1.5	24 V	■	■	■	■	■	EP015R2+BAC	1400	350	
	20	1"	3/4"	0.69	41.7	2.5		■	■	■	■	■	■	EP020R2+BAC	1400	350
	25	1 1/4"	1"	0.97	58.3	3.5		■	■	■	■	■	■	EP025R2+BAC	1400	350
	32	1 1/2"	1 1/4"	1.67	100	6		■	■	■	■	■	■	EP032R2+BAC	1400	350
	40	2"	1 1/2"	2.78	166.7	10		■	■	■	■	■	■	EP040R2+BAC	1400	350
	50	2 1/2"	2"	4.17	250	15		■	■	■	■	■	■	EP050R2+BAC	1400	350
Fail-safe																
25	15	3/4"	1/2"	0.42	25	1.5	24 V	■	■	■	■	■	EP015R2+KBAC	1400	350	
	20	1"	3/4"	0.69	41.7	2.5		■	■	■	■	■	■	EP020R2+KBAC	1400	350
	25	1 1/4"	1"	0.97	58.3	3.5		■	■	■	■	■	■	EP025R2+KBAC	1400	350
	32	1 1/2"	1 1/4"	1.67	100	6		■	■	■	■	■	■	EP032R2+KBAC	1400	350
	40	2"	1 1/2"	2.78	166.7	10		■	■	■	■	■	■	EP040R2+KBAC	1400	350
	50	2 1/2"	2"	4.17	250	15		■	■	■	■	■	■	EP050R2+KBAC	1400	350

¹⁾ Optimum heat transfer can be ensured by glycol content monitoring.



PN	DN	V'_{nom} [l/s]	V'_{nom} [l/min]	V'_{nom} [m³/h]	Nominal voltage AC/DC 24 V	Modulating (2...10 V, variable)	Communication MP-Bus	Communication Modbus	Communication BACnet	Valve type with actuator	Δp_s kPa	Δp_{max} kPa	
With standard actuator													
16	65	8	480	28.8	24 V	■	■	■	■	EP065F+MP	690	340	
	80	11	660	39.6		■	■	■	■	■	EP080F+MP	690	340
	100	20	1200	72		■	■	■	■	■	EP100F+MP	690	340
	125	31	1860	111.6		■	■	■	■	■	EP125F+MP	690	340
	150	45	2700	162		■	■	■	■	■	EP150F+MP	690	340
	Fail-safe												
16	65	8	480	28.8	24 V	■	■	■	■	EP065F+KMP	690	340	
	80	11	660	39.6		■	■	■	■	■	EP080F+KMP	690	340
	100	20	1200	72		■	■	■	■	■	EP100F+KMP	690	340
	125	31	1860	111.6		■	■	■	■	■	EP125F+KMP	690	340
	150	45	2700	162		■	■	■	■	■	EP150F+KMP	690	340
	With Modbus actuator												
16	65	8	480	28.8	24 V	■	■	■	■	EP065F+MOD	690	340	
	80	11	660	39.6		■	■	■	■	■	EP080F+MOD	690	340
	100	20	1200	72		■	■	■	■	■	EP100F+MOD	690	340
	125	31	1860	111.6		■	■	■	■	■	EP125F+MOD	690	340
	150	45	2700	162		■	■	■	■	■	EP150F+MOD	690	340

6

Characterised control valves (CCV)**Reliable control
of heating and cooling circuits**

Internal thread	2-way – 3-way	PN 25	DN 32...50	38
		PN 40	DN 15...25	
External thread	2-way – 3-way	PN 25	DN 32...50	40
		PN 40	DN 15...25	
Flange	2-way – 3-way	PN 6	DN 15...50	42
	2-way	PN 16	DN 65...150	44
External thread	2-way / 130°	PN 40	DN 10...20	46

Please refer to the data sheets or notes for project planning for further technical data to be observed.

DN 15...50

Field of use 2-way: closed and open water circuit (pH >7)
3-way: closed water circuit (pH >7)


Fluid temperature -10...120°C ¹⁾

Pipe connection Internal thread Rp (ISO 7-1)

Leakage rate 2-way: air-bubble tight, leakage rate A (EN 12266-1)
3-way: control path A – AB: air-bubble tight, leakage rate A (EN 12266-1) / bypass B – AB: leakage class I

Flow characteristic 2-way: equal percentage
3-way: control path A – AB: equal percentage / bypass B – AB: linear (flow 70% of the K_{vs} value)

Permissible operating pressure p_s: 1600 kPa

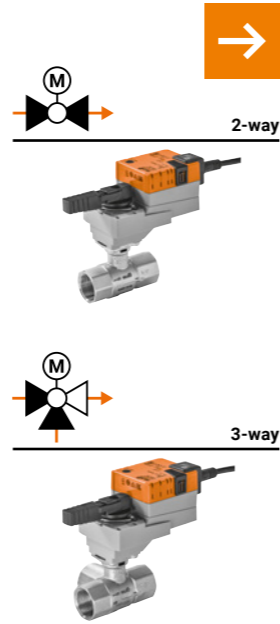

		PN 40						PN 25					
		DN 15		DN 20		DN 25		DN 32		DN 40		DN 50	
2-way		K _{vs} [m³/h]	Valve type										
		0.25	R2015-P25-S1										
		0.4	R2015-P4-S1										
		0.63	R2015-P63-S1										
		1	R2015-1-S1										
		1.6	R2015-1P6-S1		K _{vs} [m³/h]	Valve type	K _{vs} [m³/h]	Valve type					
		2.5	R2015-2P5-S1		4	R2020-4-S2	6.3	R2025-6P3-S2					
		4	R2015-4-S1		6.3	R2020-6P3-S2	10	R2025-10-S2	K _{vs} [m³/h]	Valve type	16	R2040-16-S3	
		6.3	R2015-6P3-S1		8.6	R2020-8P6-S2	16	R2025-16-S2	16	R2032-16-S3	25	R2040-25-S3	
3-way		K _{vs} [m³/h]	Valve type										
		0.25	R3015-P25-S1										
		0.4	R3015-P4-S1										
		0.63	R3015-P63-S1										
		1	R3015-1-S1										
		1.6	R3015-1P6-S1		K _{vs} [m³/h]	Valve type	K _{vs} [m³/h]	Valve type					
		2.5	R3015-2P5-S1		4	R3020-4-S2	6.3	R3025-6P3-S2	K _{vs} [m³/h]	Valve type	16	R3040-16-S3	
		4	R3015-4-S1		6.3	R3020-6P3-S2	10	R3025-10-S2	16	R3032-16-S3	16	R3040-16-S3	
									16	R3040-16-S3	25	R3040-25-S4	
											25	R3050-25-S4	
											40	R3050-40-S4	
											58	R3050-58-S4	
		Δp _s kPa	Δp _{max} ²⁾ kPa		Δp _s kPa	Δp _{max} ²⁾ kPa	Δp _s kPa	Δp _{max} ²⁾ kPa	Δp _s kPa	Δp _{max} ²⁾ kPa	Δp _s kPa	Δp _{max} ²⁾ kPa	



Suitable actuators

Actuator type	Nominal torque	Open/close	3-point	Modulating (2...10 V)	Fail-safe	Nominal voltage AC/DC 24 V AC/230 V	Running time motor 90°	Running time fail-safe	Actuator type		Without auxiliary switch		With auxiliary switch		Without auxiliary switch		With auxiliary switch				
									NC	NO	Without auxiliary switch	With 2 auxiliary switches	Without auxiliary switch	With 2 auxiliary switches	Without auxiliary switch	With 2 auxiliary switches					
	2 Nm	■	■			24 V	100 s		TR24 ³⁾		1400	350									
			■			230 V	105 s		TR230-3 ³⁾		1400	350									
				■		24 V	90 s		TR24-SR ³⁾		1400	350									
					■	24 V	35 s		TRY24-SR ³⁾		1400	350									
	5 Nm	■	■			24 V			LR24A	..-S	1400	350	1400	350	1400	350					
			■			230 V	90 s		LR230A	..-S	1400	350	1400	350	1400	350					
				■		24 V			LR24A-SR		1400	350	1400	350	1400	350					
					■	24 V			NR24A	..-S	1400	350	1400	350	1400	350	1400	350			
						230 V	90 s		NR230A	..-S	1400	350	1400	350	1400	350	1400	350			
	20 Nm	■	■			24 V			NR24A-SR		1400	350	1400	350	1400	350	1400	350			
			■			24 V			SR24A	..-S	1400	350	1400	350	1400	350	1400	350	1400	350	
				■		230 V	90 s		SR230A	..-S	1400	350	1400	350	1400	350	1400	350	1400	350	
				24 V				SR24A-SR		1400	350	1400	350	1400	350	1400	350	1400	350		
	2 Nm			■		24 V	15 s		TRC24A-SR		1400	350									
					■	24 V	35 s		LRC24A-SR		1400	350	1400	350	1400	350					
						24 V	35 s		NRC24A-SR		1400	350	1400	350	1400	350	1400	350			
						24 V	35 s		SRC24A-SR		1400	350	1400	350	1400	350	1400	350	1400	350	
	2.5 Nm			■	■	24 V	90 s	<25 s	TRF24-SR	..-O	1400	350									
				■	■	24 V	150 s	<20 s	LRF24-SR		1400	350	1400	350	1400	350					
					■	24 V	90 s	<20 s	NRF24A-SR	..-S2	..-O	1400	350	1400	350	1400	350	1400	350		
						24 V	90 s	<20 s	SRF24A-SR	..-S2	..-O	1400	350	1400	350	1400	350	1400	350	1400	350

¹⁾ Compact actuators TR../TRY.. only up to 100°C.
²⁾ Low-noise operation Δp_{max} = 200 kPa.
³⁾ If fluid temperature ≥100°C, then pipeline and valve must be insulated.

DN 15...50

Field of use Closed and open water circuit (pH >7)
 Fluid temperature -10...100°C
 Pipe connection External thread G (ISO 228-1)
 Leakage rate 2-way: air-bubble tight, leakage rate A (EN 12266-1)
 3-way: control path A – AB: air-bubble tight, leakage rate A (EN 12266-1) / bypass B – AB: leakage class I
 Flow characteristic 2-way: equal percentage
 3-way: control path A – AB: equal percentage / bypass B – AB: linear (flow 70% of the K_{vs} value)
 Permissible operating pressure p_s : 1600 kPa

		PN 40				PN 25							
		DN 15		DN 20		DN 25		DN 32		DN 40		DN 50	
		K_{vs} [m³/h]	Valve type	K_{vs} [m³/h]	Valve type	K_{vs} [m³/h]	Valve type	K_{vs} [m³/h]	Valve type	K_{vs} [m³/h]	Valve type	K_{vs} [m³/h]	Valve type
	2-way	0.63	R409										
		1	R410										
	3-way	0.63	R509										
		1	R510										
		1.6	R511										
		2.5	R512										
		4	R513										

Suitable actuators	Nominal torque	Open/close	3-point	Modulating (2...10 V)	Fail-safe	Nominal voltage AC/DC 24 V AC 230 V	Running time motor 90°	Running time fail-safe	Actuator type	PN 40		PN 25		PN 40		PN 25				
										Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa			
Compact actuators																				
	2 Nm	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			24 V	100 s		TR24											
				<input checked="" type="checkbox"/>			230 V	105 s		TR230-3										
					<input checked="" type="checkbox"/>		24 V	90 s		TR24-SR										
						<input checked="" type="checkbox"/>	24 V	35 s		TRY24-SR										
										Without auxiliary switch		With auxiliary switch								
Standard actuators																				
	5 Nm	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			24 V			LR24A											
				<input checked="" type="checkbox"/>			230 V	90 s		LR230A										
					<input checked="" type="checkbox"/>		24 V			LR24A-SR										
						<input checked="" type="checkbox"/>	24 V			NR24A										
	10 Nm	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			24 V			NR230A											
				<input checked="" type="checkbox"/>			230 V	90 s		NR24A-SR										
					<input checked="" type="checkbox"/>		24 V			SR24A										
						<input checked="" type="checkbox"/>	230 V	90 s		SR230A										
										Without auxiliary switch		With auxiliary switch								
Fast running actuators																				
	2 Nm			<input checked="" type="checkbox"/>		24 V	15 s		TRC24A-SR											
		5 Nm			<input checked="" type="checkbox"/>		24 V	35 s		LRC24A-SR										
					<input checked="" type="checkbox"/>		24 V	35 s		NRC24A-SR										
					<input checked="" type="checkbox"/>		24 V	35 s		SRC24A-SR										
										Actuator type NC		Actuator type NO								
										Without auxiliary switch		With 2 auxiliary switches		Without auxiliary switch		With 2 auxiliary switches				
	2.5 Nm			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	24 V	90 s	<25 s	TRF24-SR											
		4 Nm			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	24 V	150 s	<20 s	LRF24-SR										
					<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	24 V	90 s	<20 s	NRF24A-SR										
					<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	24 V	90 s	<20 s	SRF24A-SR										

DN 15...50

Field of use 2-way: closed and open water circuit (pH >7)
3-way: closed water circuit (pH >7)


Fluid temperature -10...100°C

Pipe connection Flange PN 6 (EN 1092-1/4)

Leakage rate 2-way: air-bubble tight, leakage rate A (EN 12266-1)
3-way: control path A – AB: air-bubble tight, leakage rate A (EN 12266-1) / bypass B – AB: leakage class I

Flow characteristic 2-way: equal percentage
3-way: control path A – AB: equal percentage / bypass B – AB: linear (flow rate 70% of K_{vs} value)

Permissible operating pressure p_s : 600 kPa



		PN 6				PN 6										
		DN 15	DN 20	DN 25	DN 32	DN 40	DN 50									
2-way	K_{vs} [m³/h]	0.63	1	1.6	2.5	4	6.3	10	16	25	40	60				
	Valve type	R6015RP63-B1	R6015R1-B1	R6015R1P6-B1	R6015R2P5-B1	R6015R4-B1	R6020R6P3-B1	R6025R10-B2	R6032R16-B3	R6040R25-B3	R6050R40-B3					
3-way	K_{vs} [m³/h]	0.63	1	1.6	2.5	4	6.3	10	16	25	40	60				
	Valve type	R7015RP63-B1	R7015R1P6-B1	R7015R4-B1	R7020R6P3-B1	R7025R10-B2	R7032R16-B3	R7040R16-B3	R7050R25-B3							
		Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa	

Suitable actuators	Nominal torque	Open/close	3-point	Modulating (2...10 V)	Fail-safe	Nominal voltage AC/DC 24 V AC 230 V	Running time motor 90°	Running time fail-safe	Actuator type	Without auxiliary switch		With auxiliary switch					
										Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa
Compact actuators																	
TR.. TRY..	2 Nm	■	■			24 V	100 s		TR24			600	100	600	100		
			■			230 V	105 s		TR230-3			600	100	600	100		
				■		24 V	90 s		TR24-SR			600	100	600	100		
					■	24 V	35 s		TRY24-SR			600	100	600	100		
Standard actuators																	
LR.. NR.. SR..	5 Nm	■	■			24 V	90 s		LR24A	..-S		600	100	600	100	600	
			■			230 V	90 s		LR230A	..-S		600	100	600	100	600	
				■		24 V			LR24A-SR			600	100	600	100	600	
			■			24 V			NR24A	..-S		600	100	600	100	600	
TRC.. LRC.. NRC.. SRC..	10 Nm	■	■			230 V	90 s		NR230A	..-S		600	100	600	100	600	
			■			24 V			NR24A-SR			600	100	600	100	600	
				■		24 V			SR24A	..-S		600	100	600	100	600	
			■			230 V	90 s		SR230A	..-S		600	100	600	100	600	
TRF.. LRF..	20 Nm	■	■			24 V			SR24A-SR			600	100	600	100	600	
				■		24 V			TRC24A-SR			600	100	600	100	600	
			■			24 V	15 s		LRC24A-SR			600	100	600	100	600	
				■		24 V	35 s		NRC24A-SR			600	100	600	100	600	
Fast running actuators																	
NRF.. SRF..	20 Nm	■	■			24 V	35 s		SRC24A-SR			600	100	600	100	600	
				■		24 V	35 s		TRF24-SR			600	100	600	100	600	
			■			24 V	35 s		LRF24-SR			600	100	600	100	600	
				■		24 V	35 s		NRF24A-SR	..-S2	..-0	..-S2-0	600	100	600	100	600
Fail-safe actuators NC/NO																	
NRF.. SRF..	20 Nm	■	■			24 V	90 s	<25 s	TRF24-SR	..-0		600	100	600	100	600	
			■			24 V	150 s	<20 s	LRF24-SR			600	100	600	100	600	
				■		24 V	90 s	<20 s	NRF24A-SR	..-S2	..-0	..-S2-0	600	100	600	100	600
			■			24 V	90 s	<20 s	SRF24A-SR	..-S2	..-0	..-S2-0	600	100	600	100	600

DN 65...150

Field of use	Closed water circuit (pH >7)
Fluid temperature	-10...120°C
Pipe connection	Flange PN 16 (EN 1092-2)
Leakage rate	Air-bubble tight, leakage rate A (EN 12266-1)
Flow characteristic	Equal percentage
Permissible operating pressure	p _s : 1600 kPa




PN 16		PN 16								
DN 65		DN 80		DN 100		DN 125		DN 150		
2-way	K _{vs} [m³/h]	Valve type	K _{vs} [m³/h]	Valve type	K _{vs} [m³/h]	Valve type	K _{vs} [m³/h]	Valve type	K _{vs} [m³/h]	Valve type
	63	R6065W63-S8	100	R6080W100-S8	160	R6100W160-S8	250	R6125W250-S8	320	R6150W320-S8

Suitable actuators	Nominal torque	Open/close	3-point	Modulating (2...10 V)	Fail-safe	Nominal voltage AC/DC 24 V AC 230 V	Running time motor 90°	Running time fail-safe	SPDT auxiliary switch	Actuator type	DN 65		DN 80		DN 100		DN 125		DN 150		
											Δp _s kPa	Δp _{max} ¹⁾ kPa	Δp _s kPa	Δp _{max} ¹⁾ kPa	Δp _s kPa	Δp _{max} ¹⁾ kPa	Δp _s kPa	Δp _{max} ¹⁾ kPa	Δp _s kPa	Δp _{max} ¹⁾ kPa	
Standard actuators																					
SR..	20 Nm	■	■	■	■	24 V	90 s	—	—	—	SR24A-5	690	400	690	400						
						230 V					SR230A-5	690	400	690	400						
						24 V					SR24A-SR-5	690	400	690	400						
						230 V					SR230A-SR-5	690	400	690	400						
						24 V					SR24P-5	690	400	690	400						
						230 V					SR230P-5	690	400	690	400						
GR..	40 Nm	■	■	■	■	24 V	150 s	—	—	—	SR24P-SR-5	690	400	690	400						
						230 V					SR230P-SR-5	690	400	690	400						
						24 V					GR24A-5 ²⁾	690	400	690	400	690	400	690	400	690	400
						230 V					GR230A-5 ²⁾	690	400	690	400	690	400	690	400	690	400
						24 V					GR24A-SR-5 ²⁾	690	400	690	400	690	400	690	400	690	400
Fast running actuators																					
SRC..	20 Nm	■	■	■	■	24 V	35 s	—	—	—	SRC24A-SR-5	690	400	690	400	690	400	690	400	690	400
Fail-safe actuators NC/NO																					
SRF..	20 Nm	■	■	■	■	24 V	<75 s	<20 s	2	—	SRF24A-5	690	400	690	400						
						230 V					SRF24A-S2-5	690	400	690	400						
						24 V					SRFA-5	690	400	690	400						
						230 V					SRFA-S2-5	690	400	690	400						
GRK..	40 Nm	■	■	■	■	24 V	150 s	—	—	—	SRF24A-SR-5	690	400	690	400						
						230 V					SRF24A-SR-S2-5	690	400	690	400						
						24 V					GRK24A-5	690	400	690	400	690	400	690	400	690	400
						230 V					GRK24A-SR-5	690	400	690	400	690	400	690	400	690	400

¹⁾ Low-noise operation Δp_{max} = 200 kPa.
²⁾ The actuator types GR..-5 will be replaced by a new GR generation at the end of the year.

DN 10...20

Field of use	Closed and open water circuit (pH >7)
Fluid temperature	2...130°C
Pipe connection	External thread G (ISO 228-1)
Leakage rate	Air-bubble tight, leakage rate A (EN 12266-1)
Flow characteristic	Equal percentage
Permissible operating pressure	p _s : 2700 kPa



Suitable actuators	Nominal torque	Open/close	3-point	Modulating (2...10 V)	Fail-safe	Nominal voltage AC/DC 24 V AC 230 V	Running time motor 90°	Nominal torque running time	Actuator type	2-way			PN 40			PN 40									
										K _{vs} [m³/h]	Valve type	Δp _s kPa	Δp _{v100} kPa	Δp _{v0} kPa	K _{vs} [m³/h]	Valve type	Δp _s kPa	Δp _{v100} kPa	Δp _{v0} kPa						
Standard actuators										0.3	R404DK	1400	400	800	2.5	R412D	1400	400	800	6.3	R417D	1400	400	800	
LR..	5 Nm	■	■			24 V	90 s	LR24A		0.4	R405DK	1400	400	800	4	R413D	1400	400	800	10	R418D	1400	400	800	
		■	■			230 V				0.63	R406DK	1400	400	800	6.3	R414D	1400	400	800	16	R419D	1400	400	800	
				■		24 V				1	R407DK	1400	400	800	2.5	R412D	1400	400	800	6.3	R414D	1400	400	800	
Fast running actuators										1.6	R408DK	1400	400	800	4	R413D	1400	400	800	10	R418D	1400	400	800	
LRC..	5 Nm			■			35 s	LRC24A-SR		2.5	R412D	1400	400	800	6.3	R414D	1400	400	800	16	R419D	1400	400	800	
Actuators with fail-safeNC										2.5	R409DK	1400	400	800	6.3	R414D	1400	400	800	16	R419D	1400	400	800	
LRF..	4 Nm			■	■		150 s	<20 s	LRF24-SR ¹⁾		0.3	R404DK	1400	400	800	2.5	R412D	1400	400	800	6.3	R414D	1400	400	800

¹⁾ If fluid temperature ≥100°C, then pipeline and valve must be insulated.

7

Globe Valves

Energy-optimised control of steam and water circuits

External thread	2-way – 3-way	PN 16	DN 15...50	50
Flange	2-way – 3-way	PN 6	DN 15...100	52
	2-way – 3-way	PN 16 / ≤120°C	DN 15...150	54
	2-way – 3-way	PN 16 / ≤150°C	DN 15...150	56
	2-way	PN 16 partly pressure-balanced	DN 40...150	58
	2-way – 3-way	PN 16	DN 200/250	60
	2-way	PN 25	DN 15...50	62
	3-way	PN 25	DN 15...100	64
	2-way	PN 25 partly pressure-balanced	DN 65...100	66
Internal thread	2-way – 3-way	PN 25 stainless steel for special applications	DN 15...50	68

Please refer to the data sheets or notes for project planning for further technical data to be observed.

DN 15...50

Field of use Closed and open water circuit (pH >7)
 Fluid temperature -10...120°C
 Pipe connection External thread G (ISO 228-1)
 Leakage rate 2-way: max. 0.05% of K_{vs} value
 3-way: control path A – AB: max. 0.05% of K_{vs} value /
 bypass B – AB: max. 1% of K_{vs} value
 Flow characteristic 2-way: equal percentage
 3-way: control path A – AB: equal percentage /
 bypass B – AB: linear
 Permissible operating pressure p_s: 1600 kPa



PN 16		PN 16			
DN 15	DN 20	DN 25	DN 32	DN 40	DN 50
2-way					
K _{vs} [m³/h]					
0.63					
1					
1.6					
2.5					
4					
	K _{vs} [m³/h]	K _{vs} [m³/h]	K _{vs} [m³/h]	K _{vs} [m³/h]	K _{vs} [m³/h]
	6.3	10	16	25	40
	Valve type	Valve type	Valve type	Valve type	Valve type
	H411B	H420B	H432B	H440B	H450B

	K _{vs} [m³/h]	K _{vs} [m³/h]	K _{vs} [m³/h]	K _{vs} [m³/h]	K _{vs} [m³/h]
	1	1.6	2.5	4	
	Valve type	Valve type	Valve type	Valve type	Valve type
	H512B	H513B	H514B	H515B	
		K _{vs} [m³/h]	K _{vs} [m³/h]	K _{vs} [m³/h]	K _{vs} [m³/h]
		6.3	10	16	25
		Valve type	Valve type	Valve type	Valve type
		H520B	H525B	H532B	H540B
					K _{vs} [m³/h]
					40
					Valve type
					H550B


Suitable actuators	Actuating force	Actuating time per nominal stroke	Actuating time for fail-safe	Open/close	3-point	Modulating (2...10 V)	Communication MP-Bus ¹⁾	Fail-safe	Nominal voltage AC/DC 24 V AC 230 V	Actuator type	DN 15		DN 20		DN 25		DN 32		DN 40		DN 50	
											Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa
Standard actuators																						
LV.. NV.. SV..	500 N	150 s							24 V	LV24A-TPC	1300	400	900	400	500	400	350	350	150	150	70	70
									230 V	LV230A-TPC	1300	400	900	400	500	400	350	350	150	150	70	70
									24 V	LV24A-SR-TPC	1300	400	900	400	500	400	350	350	150	150	70	70
	1000 N	150 s							24 V	LV24A-MP-TPC	1300	400	900	400	500	400	350	350	150	150	70	70
									24 V	NV24A-TPC	1600	400	1600	400	1300	400	1000	400	500	400	300	300
									230 V	NV230A-TPC	1600	400	1600	400	1300	400	1000	400	500	400	300	300
1500 N	150 s							24 V	NV24A-SR-TPC	1600	400	1600	400	1300	400	1000	400	500	400	300	300	
								24 V	NV24A-MP-TPC	1600	400	1600	400	1300	400	1000	400	500	400	300	300	
								24 V	SV24A-TPC	1600	400	1600	400	1600	400	1600	400	900	400	550	400	
Fast running actuators	500 N	35 s							24 V	SV230A-TPC	1600	400	1600	400	1600	400	1600	400	900	400	550	400
									230 V	SV230A-TPC	1600	400	1600	400	1600	400	1600	400	900	400	550	400
									24 V	SV24A-SR-TPC	1600	400	1600	400	1600	400	1600	400	900	400	550	400
LVC.. NVC.. SVC..	1000 N	35 s							24 V	SV24A-MP-TPC	1600	400	1600	400	1600	400	1600	400	900	400	550	400
									24 V	LVC24A-SR-TPC	1300	400	900	400	500	400	350	350	150	150	70	70
									24 V	LVC24A-MP-TPC	1300	400	900	400	500	400	350	350	150	150	70	70
Fail-safe actuators NC/NO ²⁾	1000 N	35 s	35 s						24 V	NVC24A-SR-TPC	1600	400	1600	400	1300	400	1000	400	500	400	300	300
									24 V	NVC24A-MP-TPC	1600	400	1600	400	1300	400	1000	400	500	400	300	300
									24 V	NVK24A-3-TPC	1600	400	1600	400	1300	400	1000	400	500	400	300	300
NVK.. NVKC..	1000 N	35 s	35 s						24 V	NVK230A-3	1600	400	1600	400	1300	400	1000	400	500	400	300	300
									24 V	NVK24A-SR-TPC	1600	400	1600	400	1300	400	1000	400	500	400	300	300
									24 V	NVK24A-MP-TPC	1600	400	1600	400	1300	400	1000	400	500	400	300	300
									24 V	NVKC24A-SR-TPC	1600	400	1600	400	1300	400	1000	400	500	400	300	300
									24 V	NVKC24A-MP-TPC	1600	400	1600	400	1300	400	1000	400	500	400	300	300

¹⁾ Running times, control signal, stroke limitation, and other functions for MP types configurable with Belimo Assistant 2 or service tool ZTH EU (delivery condition: modulating, operating range 2...10 V).

²⁾ The fail-safe position NC/NO of all fail-safe actuators can be adjusted on the actuator. Delivery condition: actuator stem retracted.

DN 15...100

Field of use Closed water circuit (pH >7)
 Fluid temperature -10...120°C
 Pipe connection Flange PN 6 (ISO 7005-2)
 Leakage rate 2-way: max. 0.05% of K_{vs} value
 3-way: control path A - AB: max. 0.05% of K_{vs} value / bypass B - AB: max. 1% of K_{vs} value
 Flow characteristic 2-way: equal percentage
 3-way: control path A - AB: equal percentage / bypass B - AB: linear
 Permissible operating pressure p_s: 600 kPa

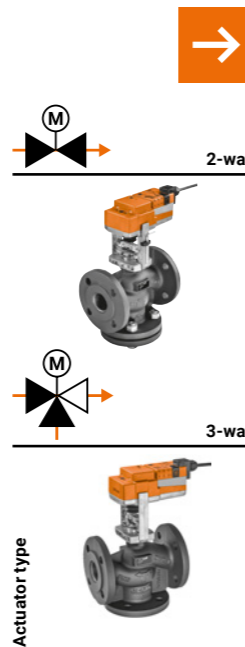

		PN 6				PN 6				
		DN 15	DN 20	DN 25	DN 32	DN 40	DN 50	DN 65	DN 80	DN 100
2-way	K _{vs} [m³/h]	0.63								
	Valve type	H611R								
		1								
		1.6								
		2.5								
3-way	K _{vs} [m³/h]	0.63								
	Valve type	H711R								
		1								
		1.6								
		2.5								


Suitable actuators	Actuating force	Actuating time per nominal stroke	Actuating time Fail-safe	Open/close	3-point	Modulating (2...10 V)	Communication MP-Bus ¹⁾	Fail-safe	Nominal voltage AC/DC 24 V AC 230 V	Actuator type	2-way		3-way		2-way		3-way		2-way		3-way		2-way		3-way							
											K _{vs} [m³/h]	Valve type	K _{vs} [m³/h]	Valve type	K _{vs} [m³/h]	Valve type	K _{vs} [m³/h]	Valve type	K _{vs} [m³/h]	Valve type	K _{vs} [m³/h]	Valve type	K _{vs} [m³/h]	Valve type	K _{vs} [m³/h]	Valve type	K _{vs} [m³/h]	Valve type	K _{vs} [m³/h]	Valve type	K _{vs} [m³/h]	Valve type
Standard actuators																																
LV.. NV.. SV..	500 N	150 s							24 V	LV24A-TPC	600	400	600	400	500	400	350	350	150	150	70	70										
									230 V	LV230A-TPC	600	400	600	400	500	400	350	350	150	150	70	70										
										24 V	LV24A-SR-TPC	600	400	600	400	500	400	350	350	150	150	70	70									
											24 V	LV24A-MP-TPC	600	400	600	400	500	400	350	350	150	150	70	70								
EV.. RV..	1000 N	150 s							24 V	NV24A-TPC	600	400	600	400	600	400	600	400	500	400	300	300	140	140	80	80						
									230 V	NV230A-TPC	600	400	600	400	600	400	600	400	500	400	300	300	140	140	80	80						
										24 V	NV24A-SR-TPC	600	400	600	400	600	400	600	400	500	400	300	300	140	140	80	80					
											24 V	NV24A-MP-TPC	600	400	600	400	600	400	600	400	500	400	300	300	140	140	80	80				
LVC.. NVC.. SVC..	1500 N	150 s							24 V	SV24A-TPC	600	400	600	400	600	400	600	400	600	400	550	400	280	280	160	160						
									230 V	SV230A-TPC	600	400	600	400	600	400	600	400	600	400	550	400	280	280	160	160						
										24 V	SV24A-SR-TPC	600	400	600	400	600	400	600	400	600	400	550	400	280	280	160	160					
											24 V	SV24A-MP-TPC	600	400	600	400	600	400	600	400	600	400	550	400	280	280	160	160				
EVC..	2500 N	150 s							24 V	EV24A-TPC															200	200						
									230 V	EV230A-TPC																	200	200				
										24 V	EV24A-SR-TPC																	200	200			
											24 V	EV24A-MP-TPC																	200	200		
NVK.. NVKC..	1000 N	150 s	35 s						24 V	NV24A-3-TPC	600	400	600	400	600	400	600	400	500	400	300	300	140	140	80	80						
										230 V	NV230A-3	600	400	600	400	600	400	600	400	500	400	300	300	140	140	80	80					
											24 V	NV24A-SR-TPC	600	400	600	400	600	400	600	400	500	400	300	300	140	140	80	80				
												24 V	NV24A-MP-TPC	600	400	600	400	600	400	600	400	500	400	300	300	140	140	80	80			
AVK..	2000 N	150 s	35 s						24 V	NVK24A-3-TPC	600	400	600	400	600	400	600	400	500	400	300	300	140	140	80	80						
										230 V	AVK230A-3																		150	150		
											24 V	AVK24A-SR-TPC																			150	150
												24 V	AVK24A-MP-TPC																		150	150

¹⁾ Running times, control signal, stroke limitation, and other functions for MP types configurable with Belimo Assistant 2 or service tool ZTH EU (delivery condition: modulating, operating range 2...10 V).

²⁾ The fail-safe position NC/NO of all fail-safe actuators can be adjusted on the actuator. Delivery condition: actuator stem retracted.

DN 15...150

Field of use Closed water circuit (pH >7)
 Fluid temperature -10...120°C
 Pipe connection Flange PN 16 (ISO 7005-2)
 Leakage rate 2-way: max. 0.05% of K_{vs} value
 3-way: control path A - AB: max. 0.05% of K_{vs} value / bypass B - AB: max. 1% of K_{vs} value
 Flow characteristic 2-way: equal percentage
 3-way: control path A - AB: equal percentage / bypass B - AB: linear
 Permissible operating pressure p_s : 1600 kPa

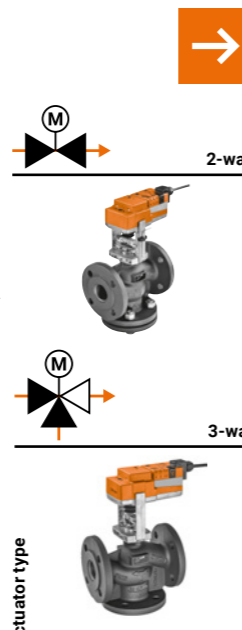









Valve type	PN 16										PN 16																							
	DN 15		DN 20		DN 25		DN 32		DN 40		DN 50		DN 65		DN 80		DN 100		DN 125		DN 150													
	K_{vs} [m ³ /h]	Valve type	K_{vs} [m ³ /h]	Valve type	K_{vs} [m ³ /h]	Valve type	K_{vs} [m ³ /h]	Valve type	K_{vs} [m ³ /h]	Valve type	K_{vs} [m ³ /h]	Valve type	K_{vs} [m ³ /h]	Valve type	K_{vs} [m ³ /h]	Valve type	K_{vs} [m ³ /h]	Valve type	K_{vs} [m ³ /h]	Valve type	K_{vs} [m ³ /h]	Valve type												
2-way	0.63	H611N	1	H612N	1.6	H613N	2.5	H614N	4	H615N	6.3	H620N	10	H625N	16	H632N	25	H640N	40	H650N	58	H664N	63	H665N	90	H679N	100	H680N	145	H6100N				
3-way	0.63	H711N	1	H712N	1.6	H713N	2.5	H714N	4	H715N	6.3	H720N	10	H725N	16	H732N	25	H740N	40	H750N	58	H764N	63	H765N	90	H779N	100	H780N	145	H7100N	220	H7125N	320	H7150N
Actuating force		Actuating time per nominal stroke		Actuating time Fail-safe		Open/close		3-point		Modulating (2...10 V)		Communication MP-Bus ¹⁾		Fail-safe		Nominal voltage AC/DC 24 V		AC 230 V		Actuator type		Δp_s kPa		Δp_{max} kPa		Δp_s kPa		Δp_{max} kPa		Δp_s kPa		Δp_{max} kPa		

Suitable actuators	Standard actuators		Fast running actuators		Fail-safe actuators NC/NO ²⁾	
	Actuating force	Actuating time	Actuating force	Actuating time	Actuating force	Actuating time
LV.. NV.. SV..	500 N	150 s	24 V	LV24A-TPC	1300	400
			230 V	LV230A-TPC	1300	400
	1000 N	150 s	24 V	LV24A-SR-TPC	1300	400
			24 V	LV24A-MP-TPC	1300	400
EV.. RV..	1500 N	150 s	24 V	NV24A-TPC	1600	400
			230 V	NV230A-TPC	1600	400
	2500 N	150 s	24 V	NV24A-SR-TPC	1600	400
			24 V	NV24A-MP-TPC	1600	400
LVC.. NVC.. SVC..	4500 N	120 s	24 V	SV24A-TPC	1600	400
			230 V	SV230A-TPC	1600	400
	2500 N	150 s	24 V	SV24A-SR-TPC	1600	400
			24 V	SV24A-MP-TPC	1600	400
EVC..	500 N	35 s	24 V	EV24A-TPC	1300	400
			24 V	EV230A-TPC	1300	400
	1000 N	35 s	24 V	EV24A-SR-TPC	1600	400
			24 V	EV24A-MP-TPC	1600	400
NVK.. NVKC..	1000 N	150 s	24 V	RV24A-SR	1600	400
			230 V	RV230A-SR	1600	400
	2000 N	150 s	24 V	LVC24A-SR-TPC	1600	400
			24 V	LVC24A-MP-TPC	1600	400
AVK..	1000 N	35 s	24 V	NVC24A-SR-TPC	1600	400
			24 V	NVC24A-MP-TPC	1600	400
	2000 N	150 s	24 V	SVC24A-SR-TPC	1600	400
			24 V	SVC24A-MP-TPC	1600	400
NVK.. NVKC..	1000 N	150 s	24 V	EVC24A-SR	1600	400
			24 V	EVK24A-3-TPC	1600	400
	2000 N	150 s	230 V	EVK230A-3	1600	400
			24 V	AVK24A-SR-TPC	1600	400
AVK..	1000 N	35 s	24 V	AVK24A-MP-TPC	1600	400
			24 V	AVK24A-3-TPC	1600	400
	2000 N	150 s	24 V	AVK24A-SR-TPC	1600	400
			24 V	AVK24A-MP-TPC	1600	400

¹⁾ Running times, control signal, stroke limitation, and other functions for MP types configurable with Belimo Assistant 2 or service tool ZTH EU (delivery condition: modulating, operating range 2...10 V).
²⁾ The fail-safe position NC/NO of all fail-safe actuators can be adjusted on the actuator. Delivery condition: actuator stem retracted.

DN 40...150

Field of use	Closed water circuit and steam circuit in the subcritical range (pH >7)
Fluid temperature	5...150°C (120°C to p _s 1600 kPa, 150°C to p _s 1400 kPa)
Pipe connection	Flange PN 16 (ISO 7005-2)
Leakage rate	Max. 0.05% of K _{vs} value
Flow characteristic	Equal percentage



		PN 16										PN 16						
		DN 40		DN 50		DN 65		DN 80		DN 100		DN 125		DN 150				
		K _{vs} [m³/h]		K _{vs} [m³/h]		K _{vs} [m³/h]		K _{vs} [m³/h]		K _{vs} [m³/h]		K _{vs} [m³/h]		K _{vs} [m³/h]				
		25		40		58		90		145		220		320				
		H640SP		H650SP		H664SP		H679SP		H6100SP		H6125SP		H6150SP				
		Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa			
Suitable actuators																		
Standard actuators																		
NV.. SV..		1000 N	150 s															
				■	■													
						■	■											
								■	■									
EV.. RV..		1500 N	150 s															
				■	■													
						■	■											
								■	■									
NVC.. SVC..		2500 N	150 s															
				■	■													
						■	■											
								■	■									
EVC..		4500 N	120 s															
				■	■													
						■	■											
								■	■									
Fast running actuators																		
EVC..		1000 N	35 s															
				■	■													
						■	■											
								■	■									
NVC.. SVC..		1500 N	35 s															
				■	■													
						■	■											
								■	■									
EVC..		2500 N	35 s															
				■	■													
						■	■											
								■	■									
Fail-safe actuators NC/NO ²⁾																		
NVK.. NVKC.. AVK..		1000 N	150 s	35 s														
					■	■												
							■	■										
									■	■								

¹⁾ Running times, control signal, stroke limitation, and other functions for MP types configurable with Belimo Assistant 2 or service tool ZTH EU (delivery condition: modulating, operating range 2...10 V).


²⁾ The fail-safe position NC/NO of all fail-safe actuators can be adjusted on the actuator. Delivery condition: actuator stem retracted.

DN 200/250

Field of use	Closed water circuit (pH >7)
Fluid temperature	2-way: 5...120°C 3-way: -10...120°C
Pipe connection	Flange PN 16 (ISO 7005-2)
Leakage rate	2-way: max. 0.05% of K_{vs} value 3-way: control path A – AB: max. 0.05% of K_{vs} value / bypass B – AB: max. 1% of K_{vs} value
Flow characteristic	2-way: equal percentage 3-way: control path A – AB: linear / bypass B – AB: linear
Permissible operating pressure	p_s : 1600 kPa

		PN 16			
		DN 200		DN 250	
 2-way	K_{vs} [m³/h]	630	1000		
	Valve type	H6200W630-S7	H6250W1000-S7		
 3-way	K_{vs} [m³/h]	630	1000		
	Valve type	H7200W630-S7	H7250W1000-S7		

Suitable actuators

 Standard actuators	Actuating force	Actuating time per nominal stroke	3-point	Modulating (2...10 V)	Nominal voltage AC/DC 24 V AC 230 V	SPDT auxiliary switch Actuator type	Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa
	GV..	15000 N	82 s	■	■	230 V 24 V	2 GV12-230-3-T GV12-24-SR-T ¹⁾	420	250	270

¹⁾ Operating range can be switched 0.5...10 V / 2...10 V.

DN 15...50

Field of use	Closed water circuit and steam circuit in the subcritical range (pH >7)
Fluid temperature	5...150°C (120°C to p _s 2500 kPa, 150°C to p _s 2430 kPa)
Pipe connection	Flange PN 25 (ISO 7005-2)
Leakage rate	Max. 0.05% of K _{VS} value
Flow characteristic	Equal percentage

		PN 25				PN 25				PN 25		PN 25		PN 25		PN 25										
		DN 15		DN 20		DN 25		DN 32		DN 40		DN 50		DN 50		DN 50										
Suitable actuators	Actuating force	Actuating time per nominal stroke	Actuating time for fail-safe	Open/close	3-point	Modulating (2...10 V)	Communication MP-Bus ¹⁾	Fail-safe	Nominal voltage AC/DC 24 V AC 230 V	Actuator type	K _{VS} [m ³ /h]		K _{VS} [m ³ /h]		K _{VS} [m ³ /h]		K _{VS} [m ³ /h]		K _{VS} [m ³ /h]							
											Valve type	Valve type	Valve type	Valve type	Valve type	Valve type	Valve type	Valve type	Valve type	Valve type						
											1	1.6	2.5	4	4	6.3	10	16	25	40						
											H6015X1-S2	H6015X1P6-S2	H6015X2P5-S2	H6015X4-S2	H6020X4-S2	H6020X6P3-S2	H6025X6P3-S2	H6025X10-S2	H6032X10-S2	H6032X16-S2	H6040X16-S2	H6040X25-S2	H6050X25-S2	H6050X40-S2		
											Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa		
Standard actuators																										
LV.. NV.. SV..	500 N	150 s						24 V	LV24A-TPC ²⁾	2500	1000	800	800	800	800	600	450	450	300	300	140	140	60	60		
								230 V	LV230A-TPC ²⁾	2500	1000	800	800	800	800	600	450	450	300	300	140	140	60	60		
								24 V	LV24A-SR-TPC ²⁾	2500	1000	800	800	800	800	600	450	450	300	300	140	140	60	60		
								24 V	LV24A-MP-TPC ²⁾	2500	1000	800	800	800	600	450	450	300	300	140	140	60	60			
	1000 N	150 s						24 V	NV24A-TPC	2500	1000	2200	1000	2200	1000	1300	1000	900	900	500	500	300	300	300	300	
								230 V	NV230A-TPC	2500	1000	2200	1000	2200	1000	1300	1000	900	900	500	500	300	300	300	300	
								24 V	NV24A-SR-TPC	2500	1000	2200	1000	2200	1000	1300	1000	900	900	500	500	300	300	300	300	
								24 V	NV24A-MP-TPC	2500	1000	2200	1000	2200	1000	1300	1000	900	900	500	500	300	300	300	300	
1500 N	150 s						24 V	SV24A-TPC	2500	1000	2500	1000	2500	1000	2100	1000	1500	1000	850	850	500	500	500	500		
							230 V	SV230A-TPC	2500	1000	2500	1000	2500	1000	2100	1000	1500	1000	850	850	500	500	500	500		
							24 V	SV24A-SR-TPC	2500	1000	2500	1000	2500	1000	2100	1000	1500	1000	850	850	500	500	500	500		
							24 V	SV24A-MP-TPC	2500	1000	2500	1000	2500	1000	2100	1000	1500	1000	850	850	500	500	500	500		
Fast running actuators																										
LVC.. NVC.. SVC..	500 N	35 s						24 V	LVC24A-SR-TPC ²⁾	2500	1000	800	800	800	800	600	450	450	300	300	140	140	60	60		
								24 V	LVC24A-MP-TPC ²⁾	2500	1000	800	800	800	600	450	450	300	300	140	140	60	60			
	1000 N	35 s						24 V	NVC24A-SR-TPC	2500	1000	2200	1000	2200	1000	1300	1000	900	900	500	500	300	300	300	300	
								24 V	NVC24A-MP-TPC	2500	1000	2200	1000	2200	1000	1300	1000	900	900	500	500	300	300	300	300	
1500 N	35 s						24 V	SVC24A-SR-TPC	2500	1000	2500	1000	2500	1000	2100	1000	1500	1000	850	850	500	500	500	500		
							24 V	SVC24A-MP-TPC	2500	1000	2500	1000	2500	1000	2100	1000	1500	1000	850	850	500	500	500	500		
Fail-safe actuators NC/NO³⁾																										
NVK.. NVKC..	1000 N	150 s	35 s					24 V	NVK24A-3-TPC	2500	1000	2200	1000	2200	1000	1300	1000	900	900	500	500	300	300	300	300	
									230 V	NVK230A-3	2500	1000	2200	1000	2200	1000	1300	1000	900	900	500	500	300	300	300	300
									24 V	NVK24A-SR-TPC	2500	1000	2200	1000	2200	1000	1300	1000	900	900	500	500	300	300	300	300
									24 V	NVK24A-MP-TPC	2500	1000	2200	1000	2200	1000	1300	1000	900	900	500	500	300	300	300	300
									24 V	NVVC24A-SR-TPC	2500	1000	2200	1000	2200	1000	1300	1000	900	900	500	500	300	300	300	300
					24 V	NVVC24A-MP-TPC	2500	1000	2200	1000	2200	1000	1300	1000	900	900	500	500	300	300	300	300				


¹⁾ Running times, control signal, stroke limitation, and other functions for MP types configurable with Belimo Assistant 2 or service tool ZTH EU (delivery condition: modulating, operating range 2...10 V).

²⁾ Actuators LV..A.. possible only on valves H6..

³⁾ The fail-safe position NC/NO of all fail-safe actuators can be adjusted on the actuator. Delivery condition: actuator stem retracted.

DN 15...100

Field of use: Closed water circuit (pH >7)
 Fluid temperature: 5...200°C (120°C to p_s 2500 kPa, 200°C to p_s 2300 kPa)
 Pipe connection: Flange PN 25 (ISO 7005-2)
 Leakage rate: Control path A – AB: max. 0.05% of K_{vs} value / bypass B – AB: max. 1% of K_{vs} value
 Flow characteristic: Control path A – AB: linear / bypass B – AB: linear

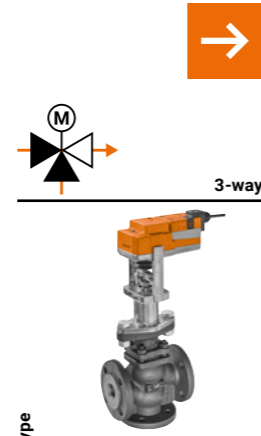






PN 25										PN 25									
DN 15		DN 20		DN 25		DN 32		DN 40		DN 50		DN 65		DN 80		DN 100			

Suitable actuators	Actuating force	Actuating time per nominal stroke	Actuating time for fail-safe	Open/close	3-point	Modulating (2...10 V)	Communication MP-Bus ¹⁾	Fail-safe	Nominal voltage AC/DC 24 V AC 230 V	Actuator type	3-way		4		6.3		10		16		25		40		63		100		160		H7100X160-S4										
											K _{vs} [m³/h]	Valve type	K _{vs} [m³/h]	Valve type	K _{vs} [m³/h]	Valve type	K _{vs} [m³/h]	Valve type	K _{vs} [m³/h]	Valve type	K _{vs} [m³/h]	Valve type	K _{vs} [m³/h]	Valve type	K _{vs} [m³/h]	Valve type	K _{vs} [m³/h]	Valve type	K _{vs} [m³/h]	Valve type	K _{vs} [m³/h]	Valve type	K _{vs} [m³/h]	Valve type	K _{vs} [m³/h]	Valve type					
Standard actuators																																									
LV.. NV.. SV..	500 N	150 s											24 V		LV24A-TPC ²⁾		800	800	600	600	450	450	300	300	140	140	60	60													
													230 V		LV230A-TPC ²⁾		800	800	600	600	450	450	300	300	140	140	60	60													
													24 V		LV24A-SR-TPC ²⁾		800	800	600	600	450	450	300	300	140	140	60	60													
													24 V		LV24A-MP-TPC ²⁾		800	800	600	600	450	450	300	300	140	140	60	60													
EV.. RV..	1000 N	150 s											24 V		NV24A-TPC		2200	1000	1000	1000	1300	1000	900	900	500	500	300	300													
													230 V		NV230A-TPC		2200	1000	1000	1000	1300	1000	900	900	500	500	300	300													
													24 V		NV24A-SR-TPC		2200	1000	1000	1000	1300	1000	900	900	500	500	300	300													
													24 V		NV24A-MP-TPC		2200	1000	1000	1000	1300	1000	900	900	500	500	300	300													
LVC.. NVC.. SVC..	1500 N	150 s											24 V		SV24A-TPC		2500	1000	2500	1000	2100	1000	1500	1000	850	850	500	500													
													230 V		SV230A-TPC		2500	1000	2500	1000	2100	1000	1500	1000	850	850	500	500													
													24 V		SV24A-SR-TPC		2500	1000	2500	1000	2100	1000	1500	1000	850	850	500	500													
													24 V		SV24A-MP-TPC		2500	1000	2500	1000	2100	1000	1500	1000	850	850	500	500													
EVC..	2500 N	150 s											24 V		EV24A-TPC																		550	550	350	350	200	200			
													230 V		EV230A-TPC																		550	550	350	350	200	200			
													24 V		EV24A-SR-TPC																		550	550	350	350	200	200			
													24 V		EV24A-MP-TPC																		550	550	350	350	200	200			
AVK..	4500 N	120 s											24 V		RV24A-SR																		1100	1000	700	700	450	450			
			Fast running actuators																																						
			NVK.. NVKC..	500 N	35 s											24 V		LVC24A-SR-TPC ²⁾		800	800	600	600	450	450	300	300	140	140	60	60										
																24 V		LVC24A-MP-TPC ²⁾		800	800	600	600	450	450	300	300	140	140	60	60										
										24 V		NVC24A-SR-TPC		2200	1000	1500	1000	1300	1000	900	900	500	500	300	300																
										24 V		NVC24A-MP-TPC		2200	1000	1500	1000	1300	1000	900	900	500	500	300	300																
AVK..	1000 N	35 s											24 V		SVC24A-SR-TPC		2500	1000	2500	1000	2100	1000	1500	1000	850	850	500	500													
													24 V		SVC24A-MP-TPC		2500	1000	2500	1000	2100	1000	1500	1000	850	850	500	500													
													24 V		EVC24A-SR																		550	550	350	350	200	200			
			Fail-safe actuators NC/NO³⁾																																						
AVK..	1000 N	150 s	35 s											24 V		NVK24A-3-TPC		2200	1000	1500	1000	1300	1000	900	900	500	500	300	300												
														230 V		NVK230A-3		2200	1000	1500	1000	1300	1000	900	900	500	500	300	300												
														24 V		NVK24A-SR-TPC		2200	1000	1500	1000	1300	1000	900	900	500	500	300	300												
														24 V		NVK24A-MP-TPC		2200	1000	1500	1000	1300	1000	900	900	500	500	300	300												
AVK..	1000 N	35 s	35 s											24 V		NVKC24A-SR-TPC		2200	1000	1500	1000	1300	1000	900	900	500	500	300	300												
														24 V		NVKC24A-MP-TPC		2200	1000	1500	1000	1300	1000	900	900	500	500	300	300												
														24 V		AVK24A-3-TPC		2200	1000	1500	1000	1300	1000	900	900	500	500	300	300	400	400	250	250	150	150						
														230 V		AVK230A-3		2200	1000	1500	1000	1300	1000	900	900	500	500	300	300	400	400	250	250	150	150						
AVK..	2000 N	150 s	35 s											24 V		AVK24A-SR-TPC		2200	1000	1500	1000	1300	1000	900	900	500	500	300	300	400	400	250	250	150	150						
														24 V		AVK24A-MP-TPC		2200	1000	1500	1000	1300	1000	900	900	500	500	300	300	400	400	250	250	150	150						

¹⁾ Running times, control signal, stroke limitation, and other functions for MP types configurable with Belimo Assistant 2 or service tool ZTH EU (delivery condition: modulating, operating range 2...10 V).
²⁾ For DN 15 only recommended with H610S and H611S.
³⁾ The fail-safe position NC/NO of all fail-safe actuators can be adjusted on the actuator. Delivery condition: actuator stem retracted.

DN 65...100

Field of use	Closed water circuit and steam circuit in the subcritical range (pH > 7) Flange PN 65 (ISO 7005-2)
Fluid temperature	5...150°C (120°C to p _s 2500 kPa, 150°C to p _s 2430 kPa)
Pipe connection	Flange PN 25 (ISO 7005-2)
Leakage rate	Max. 0.05% of K _{VS} value
Flow characteristic	Equal percentage

	Actuating force	Actuating time per nominal stroke	Actuating time for fail-safe	Open/close	3-point	Modulating (2...10 V)	Communication MP-Bus ¹⁾	Fail-safe	Nominal voltage AC/DC 24 V AC 230 V	Actuator type	PN 25 DN 65		PN 25 DN 80		PN 25 DN 100			
											K _{VS} [m³/h]	Valve type	K _{VS} [m³/h]	Valve type	K _{VS} [m³/h]	Valve type		
Suitable actuators											2-way							
												58	H6065X58-SP2	90	H6080X90-SP2	125	H6100X125-SP2	
												Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	
Standard actuators																		
NV.. SV..		1000 N	150 s						24 V	NV24A-TPC		2100	1000	1600	1000	1000	1000	
									230 V	NV230A-TPC		2100	1000	1600	1000	1000	1000	1000
									24 V	NV24A-SR-TPC		2100	1000	1600	1000	1000	1000	1000
									24 V	NV24A-MP-TPC		2100	1000	1600	1000	1000	1000	1000
									24 V	SV24A-TPC		2500	1000	2400	1000	1700	1000	1000
									230 V	SV230A-TPC		2500	1000	2400	1000	1700	1000	1000
1500 N	150 s							24 V	SV24A-SR-TPC		2500	1000	2400	1000	1700	1000	1000	
								24 V	SV24A-MP-TPC		2500	1000	2400	1000	1700	1000		
								24 V	SV24A-TPC		2500	1000	2400	1000	1700	1000		
Fast running actuators																		
NVC.. SVC..		1000 N	35 s						24 V	NVC24A-SR-TPC		2100	1000	1600	1000	1000	1000	
									24 V	NVC24A-MP-TPC		2100	1000	1600	1000	1000	1000	
									24 V	SVC24A-SR-TPC		2500	1000	2400	1000	1700	1000	
									24 V	SVC24A-MP-TPC		2500	1000	2400	1000	1700	1000	
Fail-safe actuators NC/NO²⁾																		
NVK.. NVKC..		1000 N	150 s	35 s					24 V	NVK24A-3-TPC		2100	1000	1600	1000	1000	1000	
									230 V	NVK230A-3		2100	1000	1600	1000	1000	1000	
									24 V	NVK24A-SR-TPC		2100	1000	1600	1000	1000	1000	
									24 V	NVK24A-MP-TPC		2100	1000	1600	1000	1000	1000	
									24 V	NVKC24A-SR-TPC		2100	1000	1600	1000	1000	1000	
									24 V	NVKC24A-MP-TPC		2100	1000	1600	1000	1000	1000	

¹⁾ Running times, control signal, stroke limitation, and other functions for MP types configurable with Belimo Assistant 2 or service tool ZTH EU (delivery condition: modulating, operating range 2...10 V).


²⁾ The fail-safe position NC/NO of all fail-safe actuators can be adjusted on the actuator. Delivery condition: actuator stem retracted.

DN 15...50

Field of use Closed and open water circuit (pH >7)
 Fluid temperature 0...130°C
 Pipe connection Internal thread (ISO 7-1)
 Leakage rate 2-way: max. 0.01% of K_{vs} value
 3-way: control path A – AB: max. 0.02% of K_{vs} value /
 bypass B – AB: max. 0.02% of K_{vs} value
 Flow characteristic 2-way: equal percentage
 3-way: control path A – AB: equal percentage /
 bypass B – AB: linear
 Permissible operating pressure p_s: 2500 kPa



		PN 25				PN 25							
		DN 15		DN 20		DN 25		DN 32		DN 40		DN 50	
 2-way	K _{vs} [m ³ /h]	1.6	4	6.3	10	16	25	40	40	40	40	40	
	Valve type	H215S-G	H215S-J	H220S-K	H225S-L	H232S-M	H240S-N	H250S-P					
 3-way	K _{vs} [m ³ /h]	1.6	4	6.3	10	16	25	40	40	40	40	40	
	Valve type	H315S-G	H315S-J	H320S-K	H325S-L	H332S-M	H340S-N	H350S-P					

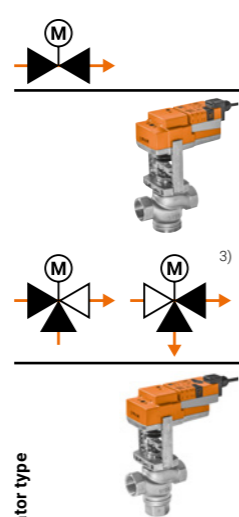

Suitable actuators

Actuator type	Actuating force	Actuating time per nominal stroke	Open/close	3-point	Modulating (2...10 V)	Communication MP-Bus ¹⁾	Fail-safe	Nominal voltage AC/DC 24 V AC 230 V	Actuator type	DN 15		DN 20		DN 25		DN 32		DN 40		DN 50				
										Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa			
Standard actuators																								
 LV.. NV.. SV..	500 N	150 s	■	■	■	■	■	24 V	LV24A-TPC	650	650	650	650	650	650									
								230 V	LV230A-TPC	650	650	650	650	650	650									
								24 V	LV24A-SR-TPC	650	650	650	650	650	650									
								24 V	LV24A-MP-TPC	650	650	650	650	650	650									
	1000 N	150 s	■	■	■	■	■	■	24 V	NV24A-TPC	800	800	800	800	800	800	600	600	550	550	450	450	300	300
									230 V	NV230A-TPC	800	800	800	800	800	800	600	600	550	550	450	450	300	300
									24 V	NV24A-SR-TPC	800	800	800	800	800	800	600	600	550	550	450	450	300	300
									24 V	NV24A-MP-TPC	800	800	800	800	800	800	600	600	550	550	450	450	300	300
1500 N	150 s	■	■	■	■	■	■	24 V	SV24A-TPC									700	700	500	500			
								230 V	SV230A-TPC											700	700	500	500	
								24 V	SV24A-SR-TPC											700	700	500	500	
								24 V	SV24A-MP-TPC											700	700	500	500	
Fast running actuators																								
 LVC.. NVC.. SVC..	500 N	35 s	■	■	■	■	■	24 V	LVC24A-SR-TPC	650	650	650	650	650	650									
								24 V	LVC24A-MP-TPC	650	650	650	650	650	650									
	1000 N	35 s	■	■	■	■	■	■	24 V	NVC24A-SR-TPC	800	800	800	800	800	800	600	600	550	550	450	450	300	300
									24 V	NVC24A-MP-TPC	800	800	800	800	800	800	600	600	550	550	450	450	300	300
	1500 N	35 s	■	■	■	■	■	■	24 V	SVC24A-SR-TPC										700	700	500	500	
									24 V	SVC24A-MP-TPC											700	700	500	500
Fail-safe actuators NC/NO²⁾																								
 NVK.. NVKC..	1000 N	150 s	■	■	■	■	■	24 V	NVK24A-3-TPC	800	800	800	800	800	800	600	600	550	550	450	450	300	300	
								230 V	NVK230A-3	800	800	800	800	800	800	600	600	550	550	450	450	300	300	
								24 V	NVK24A-SR-TPC	800	800	800	800	800	800	600	600	550	550	450	450	300	300	
								24 V	NVK24A-MP-TPC	800	800	800	800	800	800	600	600	550	550	450	450	300	300	
								24 V	NVKC24A-SR-TPC	800	800	800	800	800	800	600	600	550	550	450	450	300	300	
								24 V	NVKC24A-MP-TPC	800	800	800	800	800	800	600	600	550	550	450	450	300	300	

¹⁾ Running times, control signal, stroke limitation, and other functions for MP types configurable with Belimo Assistant 2 or service tool ZTH EU (delivery condition: modulating, operating range 2...10 V).

²⁾ The fail-safe position NC/NO of all fail-safe actuators can be adjusted on the actuator. Delivery condition: actuator stem retracted.

³⁾ When used as a diverting valve, the maximum values are reduced to a quarter.

8

Control butterfly valves

Fit for reliable control applications

Wafer types	2-way	PN 6, 10, 16	DN 25...300	72
		PN 10, 16	DN 350	74
		PN 16	DN 400...700	74
Lug types	2-way	PN 10, 16	DN 25...150	72
		PN 16	DN 200...300	72
	3-way	PN 16	DN 350...700	74
		PN 16	DN 100...300	76

Please refer to the data sheets or notes for project planning for further technical data to be observed.

DN 25...300

Field of use	Closed and open water circuit (pH >7)
Fluid temperature	DN 25...80: -10...120°C DN 100...150: -20...120°C DN 200...300: -10...120°C
Pipe connection	Flange (ISO 7005-2 and EN 1092-2) D6..W additionally: ISO 7005-1 and EN 1092-1
Leakage rate	Tight, leakage rate A (EN 12266-1)
Flow characteristic	DN 25...125: 0...60% opening angle: equal percentage DN 150...300: characteristic curve configurable with Belimo Assistant 2: equal percentage or linear
Permissible operating pressure	p _s : 1600 kPa

→	PN 6, 10, 16											
	DN 25	DN 32	DN 40	DN 50	DN 65	DN 80	DN 100	DN 125	DN 150	DN 200	DN 250	DN 300
Wafer types	K _{vs} ¹⁾ [m ³ /h] 24	K _{vs} ¹⁾ [m ³ /h] 25	K _{vs} ¹⁾ [m ³ /h] 27	K _{vs} ¹⁾ [m ³ /h] 30	K _{vs} ¹⁾ [m ³ /h] 50	K _{vs} ¹⁾ [m ³ /h] 75	K _{vs} ¹⁾ [m ³ /h] 220	K _{vs} ¹⁾ [m ³ /h] 310	K _{vs} ¹⁾ [m ³ /h] 550	K _{vs} ¹⁾ [m ³ /h] 820	K _{vs} ¹⁾ [m ³ /h] 1300	K _{vs} ¹⁾ [m ³ /h] 1740
	Valve D625N	Valve D632N	Valve D640N	Valve D650N	Valve D665N	Valve D680N	Valve D6100W	Valve D6125W	Valve D6150W	Valve D6200W	Valve D6250W	Valve D6300W



→	PN 10, 16											
	DN 25	DN 32	DN 40	DN 50	DN 65	DN 80	DN 100	DN 125	DN 150	DN 200	DN 250	DN 300
Lug types	K _{vs} ¹⁾ [m ³ /h] 24	K _{vs} ¹⁾ [m ³ /h] 25	K _{vs} ¹⁾ [m ³ /h] 27	K _{vs} ¹⁾ [m ³ /h] 30	K _{vs} ¹⁾ [m ³ /h] 50	K _{vs} ¹⁾ [m ³ /h] 75	K _{vs} ¹⁾ [m ³ /h] 220	K _{vs} ¹⁾ [m ³ /h] 310	K _{vs} ¹⁾ [m ³ /h] 550	K _{vs} ¹⁾ [m ³ /h] 820	K _{vs} ¹⁾ [m ³ /h] 1300	K _{vs} ¹⁾ [m ³ /h] 1740
	Valve D625NL	Valve D632NL	Valve D640NL	Valve D650NL	Valve D665NL	Valve D680NL	Valve D6100WL	Valve D6125WL	Valve D6150WL	Valve D6200WL	Valve D6250WL	Valve D6300WL


Suitable actuators	Nominal torque	Open/close 3-point	Modulating	Terminal connection	Fail-safe	Nominal voltage AC/DC 24 V AC 230 V	Running time motor 90°	SPDT auxiliary switch	Degree of protection	Actuator type	Linkage type	DN 25		DN 32		DN 40		DN 50		DN 65		DN 80		DN 100		DN 125		DN 150		DN 200		DN 250		DN 300							
												Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa		
Modulating actuators																																									
SR..	20 Nm		■			24 V	90 s		IP54	SR24A-SR-5	ZJR03 ⁵⁾	1200	300	1200	300	1200	300	1200	300	1200	300																				
GR..	40 Nm		■			230 V	150 s		IP54	SR230A-SR-5	ZJR03 ⁵⁾	1200	300	1200	300	1200	300	1200	300	1200	300																				
Communicative actuators																																									
JR..	90 Nm	■ ²⁾	■ ²⁾	■ ²⁾	■ ²⁾	AC 24...240 V DC 24...125 V	35 s ³⁾	2	IP66/ IP67	JRCA-BAC-S2-T	ZJR03 / ZPR03 ⁵⁾	1200	300	1200	300	1200	300	1200	300	1400	300	1400	300	1400	300	1400	300														
PR..	160 Nm	■ ²⁾	■ ²⁾	■ ²⁾	■ ²⁾	AC 24...240 V DC 24...125 V	35 s ⁴⁾	2		PRCA-BAC-S2-T PRCA-BAC-S2-T-200 PRCA-BAC-S2-T-250	ZJR01 / ZPR01															1400	300														
Communicative fail-safe actuators NC/NO																																									
PRK..	160 Nm	■ ²⁾	■ ²⁾	■ ²⁾	■ ²⁾	AC 24...240 V DC 24...125 V	35 s ⁴⁾	2	IP66/ IP67	PRKCA-BAC-S2-T PRKCA-BAC-S2-T-200 PRKCA-BAC-S2-T-250	ZPR01															1400	300														

¹⁾ For control applications with an opening angle of 60%. The maximum flow speed of 4 m/s may not be exceeded in the control butterfly valve.
²⁾ Configurable with Belimo Assistant 2.
³⁾ 20...120 s configurable with Belimo Assistant 2.
⁴⁾ 30...120 s configurable with Belimo Assistant 2.
⁵⁾ Linkage is required only in combination with a JR or PR actuator.

DN 350...700

Field of use	Closed and open water circuit (pH >7)
Fluid temperature	-10...120°C
Pipe connection	Flange (ISO 7005-2 and EN 1092-2)
Leakage rate	Tight, leakage rate A (EN 12266-1)
Flow characteristic	0...60% opening angle: equal percentage
Permissible operating pressure	p _s : 1600 kPa


	PN 10, 16				PN 16									
	DN 350		DN 400		DN 450		DN 500		DN 600		DN 700			
Wafer types	K _{vs} ¹⁾ [m ³ /h]	Valve	K _{vs} ¹⁾ [m ³ /h]	Valve	K _{vs} ¹⁾ [m ³ /h]	Valve	K _{vs} ¹⁾ [m ³ /h]	Valve	K _{vs} ¹⁾ [m ³ /h]	Valve	K _{vs} ¹⁾ [m ³ /h]	Valve		
	3010	D6350N	4140	D6400N	5490	D6450N	7060	D6500N	10900	D6600N	11760	D6700N		
Lug types	K _{vs} [m ³ /h]	Valve	K _{vs} [m ³ /h]	Valve	K _{vs} [m ³ /h]	Valve	K _{vs} [m ³ /h]	Valve	K _{vs} [m ³ /h]	Valve	K _{vs} [m ³ /h]	Valve		
	3010	D6350NL ²⁾	4140	D6400NL ²⁾	5490	D6450NL ²⁾	7060	D6500NL	10900	D6600NL	11760	D6700NL		
Linkage type	ZSY-703		ZSY-401		ZSY-701		ZSY-702		ZSY-901		ZSY-902		ZSY-903	
	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa


Suitable actuators	Nominal torque	Modulating (2...10 V / 0.5...10 V)	Terminal connection	Nominal voltage AC 230 V	Running time motor 90°	SPDT auxiliary switch	Degree of protection	Actuator type
	650 Nm	■	■	230 V	31 s	2	IP67	SY6-230A-MF-T ³⁾
	1000 Nm	■	■		55 s	2	IP67	SY7-230A-MF-T ³⁾
	1500 Nm	■	■		55 s	2	IP67	SY8-230A-MF-T
	2000 Nm	■	■		70 s	2	IP67	SY9-230A-MF-T
	2500 Nm	■	■		70 s	2	IP67	SY10-230A-MF-T
	3500 Nm	■	■		70 s	2	IP67	SY12-230A-MF-T

¹⁾ For control applications with an opening angle of 60%. The maximum flow speed of 4 m/s may not be exceeded in the control butterfly valve.
²⁾ The control butterfly valve types D6350...450NL will be replaced by the new types D6350...450WL over the course of the year.
³⁾ The actuator types SY6.. and SY7.. will be replaced by the new types QR.. and YR.. over the course of the year.

DN 100...300

Field of use	Closed and open water circuit (pH >7) for mixing and distribution applications
Fluid temperature	-10...120°C D7..WL/BAC DN 100...150: -20...120°C
Pipe connection	Flange (ISO 7005-1/2, EN 1092-1/2)
Leakage rate	Tight, leakage rate A (EN 12266-1)
Flow characteristic	Characteristic curve configurable with the Belimo Assistant 2: control path A – AB: Equal percentage and bypass B – AB: equal percentage inverted or control path A – AB: linear and bypass B – AB: linear inverted
Permissible operating pressure	p _s : 1600 kPa

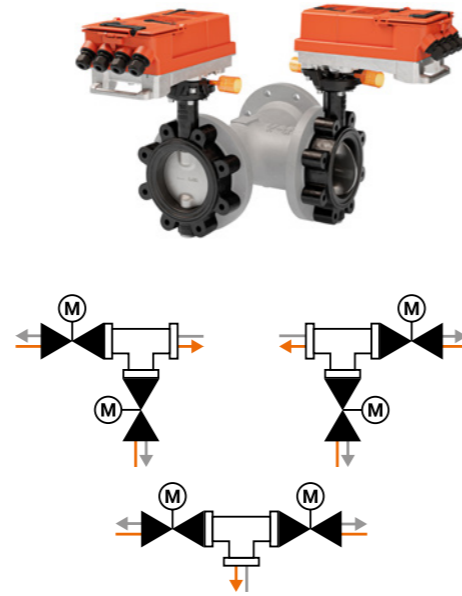

PN	DN	K _{vs} [m³/h] ¹⁾	Open/close ²⁾	Modulating (2...10 V / 0.5...10 V) ²⁾	Communication BACnet MS/TP ²⁾	Communication Modbus RTU ²⁾	Communication MP-Bus ²⁾	Nominal voltage	Running time motor 90°	SPDT auxiliary switch	Degree of protection	Control butterfly valve type with actuator	ΔP _s kPa	ΔP _{max} kPa	T-piece type
With communicative actuator															
D7..L/BAC 	16	100	160	■	■	■	■	AC 24...240 V DC 24...125 V	35 s ³⁾	2	IP66/ IP67	D7100WL/BAC ⁵⁾	1400	300	ZD7100 ⁶⁾
		125	280	■	■	■	■		35 s ³⁾	2	IP66/ IP67	D7125WL/BAC ⁵⁾	1400	300	ZD7125 ⁶⁾
		150	380	■	■	■	■		35 s ³⁾	2	IP66/ IP67	D7150WL/BAC ⁵⁾	1400	300	ZD7150 ⁶⁾
		200	800	■	■	■	■		35 s ⁴⁾	4	IP66/ IP67	D7200WL/BAC ⁵⁾	1400	300	ZD7200 ⁶⁾
		250	1200	■	■	■	■		35 s ⁴⁾	4	IP66/ IP67	D7250WL/BAC ⁵⁾	1400	300	ZD7250 ⁶⁾
		300	1700	■	■	■	■		35 s ⁴⁾	4	IP66/ IP67	D7300WL/BAC ⁵⁾	1400	300	ZD7300 ⁶⁾

Suitable T-pieces



Spheroidal graphite cast iron with fastening screws

¹⁾ For control applications with opening angle 60% (configurable with Belimo Assistant 2). The maximum flow speed of 4 m/s may not be exceeded in the control butterfly valve.

²⁾ Configurable with Belimo Assistant 2.

³⁾ 20...120 s configurable with Belimo Assistant 2.

⁴⁾ 30...120 s configurable with Belimo Assistant 2.

⁵⁾ T-piece is not included in scope of delivery.

⁶⁾ The necessary fastening screws and nuts are included in the scope of delivery.

9

Ball valves**Open/close and changeover applications**

Internal thread	Open/close ball valves	2-way		PN 25, 40	DN 15...50	80
	Changeover ball valves	3-way	T-bore	PN 25, 40	DN 15...50	82
L-bore						
External thread	Open/close ball valves	2-way		PN 25, 40	DN 15...50	84
	Changeover ball valves	3-way	T-bore			
Flange	Open/close ball valves	2-way		PN 6	DN 15...50	86
	Changeover ball valves	3-way	T-bore			

Please refer to the data sheets or notes for project planning for further technical data to be observed.

DN 15...50

Field of use 2-way: closed and open water circuit (pH >7)
 3-way: closed water circuit (pH >7)



Fluid temperature -10...120°C ¹⁾

Pipe connection Internal thread Rp (ISO 7-1)

Leakage rate 2-way: air-bubble tight, leakage rate A (EN 12266-1)
 3-way: path A – AB: air-bubble tight, leakage rate A (EN 12266-1) / bypass B – AB: leakage class I

Flow 3-way: bypass B – AB: approx. 50% of the K_{vs} value

Permissible operating pressure p_s: 1600 kPa





	PN 40				PN 25								
	DN 15	DN 20	DN 25	DN 32	DN 40	DN 50							
	2-way	K _{vs} [m ³ /h] 15	Valve type R2015-S1	K _{vs} [m ³ /h] 32	Valve type R2020-S2	K _{vs} [m ³ /h] 26	Valve type R2025-S2	K _{vs} [m ³ /h] 32	Valve type R2032-S3	K _{vs} [m ³ /h] 31	Valve type R2040-S3	K _{vs} [m ³ /h] 49	Valve type R2050-S4
	3-way T-bore	K _{vs} [m ³ /h] 15	Valve type R3015-S1	K _{vs} [m ³ /h] 32	Valve type R3020-S2	K _{vs} [m ³ /h] 26	Valve type R3025-S2	K _{vs} [m ³ /h] 32	Valve type R3032-S3	K _{vs} [m ³ /h] 31	Valve type R3040-S3	K _{vs} [m ³ /h] 49	Valve type R3050-S4

Suitable actuators	Nominal torque	Open/close	3-point	Fail-safe	Nominal voltage AC/DC 24 V AC 230 V	Running time motor 90°	Running time fail-safe	Actuator type	Without auxiliary switch		With auxiliary switch		Without auxiliary switch		With auxiliary switch	
									Δp _s kPa	Δp _{max} ²⁾ kPa	Δp _s kPa	Δp _{max} ²⁾ kPa	Δp _s kPa	Δp _{max} ²⁾ kPa	Δp _s kPa	Δp _{max} ²⁾ kPa
Compact actuators																
TR.. TRY..	2 Nm	■	■	—	24 V	100 s	—	TR24 ³⁾	—	—	—	—	1400	1000	—	—
					230 V	35 s	—	TRY24 ³⁾	—	—	—	—	—	—	—	—
					230 V	35 s	—	TRY230 ³⁾	—	—	—	—	—	—	—	—
Standard actuators																
LR.. NR.. SR..	5 Nm	■	■	—	24 V	90 s	—	LR24A	..-S	—	—	—	1400	1000	1400	1000
					230 V	90 s	—	LR230A	..-S	—	—	—	—	—	—	
	10 Nm	■	■	—	24 V	90 s	—	NR24A	..-S	—	—	—	1400	1000	1400	1000
					230 V	90 s	—	NR230A	..-S	—	—	—	—	—	—	
	20 Nm	■	■	—	24 V	90 s	—	SR24A	..-S	—	—	—	1400	1000	1400	1000
					230 V	90 s	—	SR230A	..-S	—	—	—	—	—	—	
Very fast running actuators																
LRQ.. NRQ.. SRQ..	4 Nm	■	—	—	24 V	9 s	—	LRQ24A	—	—	—	—	1400	1000	1400	1000
					24 V	9 s	—	NRQ24A	—	—	—	—	—	—	—	
					24 V	9 s	—	SRQ24A	—	—	—	—	—	—	—	
Fail-safe actuators NC/NO																
TRF.. LRF..	2.5 Nm	■	■	—	24 V	75 s	<75 s	TRF24 ³⁾	..-S	..-O	..-S-O	—	—	—	—	—
					230 V	75 s	<20 s	TRF230 ³⁾	..-S	..-O	..-S-O	—	—	—	—	
	4 Nm	■	■	—	24 V	75 s	<20 s	LRF24 ³⁾	..-S	..-O	..-S-O	—	—	—	—	—
					230 V	75 s	<20 s	LRF230 ³⁾	..-S	..-O	..-S-O	—	—	—	—	
NRF.. SRF..	10 Nm	■	■	—	24 V	75 s	<20 s	Without auxiliary switch	With 2 auxiliary switches	Without auxiliary switch	With 2 auxiliary switches	—	—	—	—	—
					AC 24...240 V DC 24...125 V	75 s	<20 s	NRF24A	..-S2	..-O	..-S2-O	—	—	—	—	
	20 Nm	■	■	—	24 V	75 s	<20 s	Without auxiliary switch	With 2 auxiliary switches	Without auxiliary switch	With 2 auxiliary switches	—	—	—	—	—
					AC 24...240 V DC 24...125 V	75 s	<20 s	NRFA	..-S2	..-O	..-S2-O	—	—	—	—	
20 Nm	■	■	—	24 V	75 s	<20 s	Without auxiliary switch	With 2 auxiliary switches	Without auxiliary switch	With 2 auxiliary switches	—	—	—	—	—	
				AC 24...240 V DC 24...125 V	75 s	<20 s	SRF24A	..-S2	..-O	..-S2-O	—	—	—	—		
20 Nm	■	■	—	24 V	75 s	<20 s	Without auxiliary switch	With 2 auxiliary switches	Without auxiliary switch	With 2 auxiliary switches	—	—	—	—	—	
				AC 24...240 V DC 24...125 V	75 s	<20 s	SRFA	..-S2	..-O	..-S2-O	—	—	—	—		

¹⁾ Compact actuators TR../TRY.. only up to 100°C.
²⁾ Low-noise operation Δp_{max} = 200 kPa.
³⁾ If fluid temperature ≥100°C, then pipeline and valve must be insulated.

DN 15...50

Field of use Closed and open water circuit (pH >7)
 Fluid temperature -10...100°C
 Pipe connection Internal thread Rp (ISO 7-1)
 Leakage rate Air-bubble tight, leakage rate A (EN 12266-1)
 Permissible operating pressure p_s: 1600 kPa

		PN 40										PN 25										
		DN 15		DN 20		DN 25		DN 32		DN 40		DN 40		DN 50		DN 50		DN 50		DN 50		
		K _{vs} [m³/h]		K _{vs} [m³/h]		K _{vs} [m³/h]		K _{vs} [m³/h]		K _{vs} [m³/h]		K _{vs} [m³/h]		K _{vs} [m³/h]		K _{vs} [m³/h]		K _{vs} [m³/h]		K _{vs} [m³/h]		
		Valve type		Valve type		Valve type		Valve type		Valve type		Valve type		Valve type		Valve type		Valve type		Valve type		
		5.5 R3015-BL1		11 R3020-BL2		10 R3025-BL2		9 R3032-BL2		15 R3032-BL3		14 R3040-BL3		47 R3040-BL4		24 R3050-BL3		75 R3050-BL4		75 R3050-BL4		
		Δp _s kPa		Δp _{max} ¹⁾ kPa		Δp _s kPa		Δp _{max} ¹⁾ kPa		Δp _s kPa		Δp _{max} ¹⁾ kPa		Δp _s kPa		Δp _{max} ¹⁾ kPa		Δp _s kPa		Δp _{max} ¹⁾ kPa		
		500 350		500 350		500 350		500 350		500 350		500 350		500 350		500 350		500 350		500 350		
Suitable actuators		Compact actuators		Without auxiliary switch		With auxiliary switch																
		TR..	2 Nm	24 V	100 s	TR24	500	350												
		TRY..	2 Nm	230 V	35 s	TRY24	500	350												
	Standard actuators																					
	LR..	5 Nm	24 V	90 s	LR24A	...-S	...	500	350	500	350	500	350									
	NR..	5 Nm	230 V	90 s	LR230A	...-S	...	500	350	500	350	500	350									
	SR..	10 Nm	24 V	90 s	NR24A	...-S	...	500	350	500	350	500	350	500	350					500	350	
		10 Nm	230 V	90 s	NR230A	...-S	...	500	350	500	350	500	350	500	350	500	350			500	350	
		20 Nm	24 V	90 s	SR24A	...-S	...	500	350	500	350	500	350	500	350	500	350	500	350	500	350	500
	Very fast running actuators																					
	LRQ..	4 Nm	24 V	9 s	LRQ24A	500	350	500	350	500	350									
	NRQ..	8 Nm	24 V	9 s	NRQ24A	500	350	500	350	500	350	500	350	500	350					
SRQ..	16 Nm	24 V	9 s	SRQ24A	500	350	500	350	500	350	500	350	500	350			500	350		
	Fail-safe actuators NC/NO				Actuator type NC		Actuator type NO															
	TRF..	2.5 Nm	24 V	75 s <75 s	TRF24	...-S	...-O	...-S-O	500	350												
			230 V	75 s <20 s	TRF230	...-S	...-O	...-S-O	500	350												
		4 Nm	24 V	75 s <20 s	TRF24	...-S	...-O	...-S-O	500	350	500	350	500	350								
			230 V	75 s <20 s	TRF230	...-S	...-O	...-S-O	500	350	500	350	500	350								
	LRF..	10 Nm	24 V	75 s <20 s	Without auxiliary switch	With 2 auxiliary switches	Without auxiliary switch	With 2 auxiliary switches	500	350	500	350	500	350	500	350	500	350			500	350
			AC 24...240 V	75 s <20 s	NRF24A	...-S2	...-O	...-S2-O	500	350	500	350	500	350	500	350	500	350			500	350
		20 Nm	24 V	75 s <20 s	Without auxiliary switch	With 2 auxiliary switches	Without auxiliary switch	With 2 auxiliary switches	500	350	500	350	500	350	500	350	500	350	500	350	500	350
			AC 24...240 V	75 s <20 s	SRF24A	...-S2	...-O	...-S2-O	500	350	500	350	500	350	500	350	500	350	500	350	500	350
	NRF..	20 Nm	24 V	75 s <20 s	Without auxiliary switch	With 2 auxiliary switches	Without auxiliary switch	With 2 auxiliary switches	500	350	500	350	500	350	500	350	500	350	500	350	500	350
			DC 24...125 V	75 s <20 s	SRFA	...-S2	...-O	...-S2-O	500	350	500	350	500	350	500	350	500	350	500	350	500	350

¹⁾ Low-noise operation Δp_{max} = 200 kPa.

DN 15...50

Field of use Closed and open water circuit (pH >7)
 Fluid temperature -10...100°C
 Pipe connection External thread G (ISO 228-1)
 Leakage rate 2-way: air-bubble tight, leakage rate A (EN 12266-1)
 3-way: path A – AB: air-bubble tight, leakage rate A (EN 12266-1) / bypass B – AB: leakage class I
 Flow 3-way: bypass B – AB: approx. 50% of the K_{vs} value
 Permissible operating pressure p_s: 1600 kPa



		PN 40				PN 25							
		DN 15		DN 20		DN 25		DN 32		DN 40		DN 50	
		K _{vs} [m³/h]	Valve type	K _{vs} [m³/h]	Valve type	K _{vs} [m³/h]	Valve type	K _{vs} [m³/h]	Valve type	K _{vs} [m³/h]	Valve type	K _{vs} [m³/h]	Valve type
2-way		8.6	R415	21	R420	26	R425	32	R432	32	R440	49	R450
3-way T-bore		8.6	R515	21	R520	26	R525	32	R532	32	R540	49	R550

Suitable actuators	Nominal torque	Open/close	3-point	Fail-safe	Nominal voltage AC/DC 24 V AC 230 V	Running time motor 90°	Running time fail-safe	Actuator type	2-way		3-way		2-way		3-way		2-way		3-way			
									K _{vs} [m³/h]	Valve type	K _{vs} [m³/h]	Valve type	K _{vs} [m³/h]	Valve type	K _{vs} [m³/h]	Valve type	K _{vs} [m³/h]	Valve type	K _{vs} [m³/h]	Valve type	K _{vs} [m³/h]	Valve type
									Δp _s kPa	Δp _{max} ¹⁾ kPa	Δp _s kPa	Δp _{max} ¹⁾ kPa	Δp _s kPa	Δp _{max} ¹⁾ kPa	Δp _s kPa	Δp _{max} ¹⁾ kPa	Δp _s kPa	Δp _{max} ¹⁾ kPa	Δp _s kPa	Δp _{max} ¹⁾ kPa		
Compact actuators																						
TR.. TRY..		2 Nm	■	■	24 V	100 s		TR24	Without auxiliary switch	1400	400	1400	400									
									With auxiliary switch	1400	400	1400	400									
									TRY24	1400	400	1400	400									
					230 V	35 s		TRY230	1400	400	1400	400										
Standard actuators																						
LR.. NR.. SR..		5 Nm	■	■	24 V	90 s		LR24A	Without auxiliary switch	1400	400	1400	400	1400	400							
									With auxiliary switch	1400	400	1400	400	1400	400							
						230 V	90 s		LR230A	1400	400	1400	400	1400	400							
		10 Nm	■	■	24 V	90 s			NR24A	Without auxiliary switch	1400	400	1400	400	1400	400	1400	400	1400	400	1400	400
										With auxiliary switch	1400	400	1400	400	1400	400	1400	400	1400	400	1400	400
						230 V	90 s		NR230A	1400	400	1400	400	1400	400	1400	400	1400	400	1400	400	
20 Nm	■	■	24 V	90 s			SR24A	Without auxiliary switch	1400	400	1400	400	1400	400	1400	400	1400	400	1400	400		
								With auxiliary switch	1400	400	1400	400	1400	400	1400	400	1400	400	1400	400		
				230 V	90 s		SR230A	1400	400	1400	400	1400	400	1400	400	1400	400	1400	400			
Very fast running actuators																						
LRQ.. NRQ.. SRQ..		4 Nm	■	■	24 V	9 s		LRQ24A	Without auxiliary switch	1400	400	1400	400	1400	400							
									With auxiliary switch	1400	400	1400	400	1400	400							
									NRQ24A	1400	400	1400	400	1400	400							
					24 V	9 s		SRQ24A	1400	400	1400	400	1400	400	1400	400	1400	400				
Fail-safe actuators NC/NO																						
TRF..		2.5 Nm	■	■	24 V	75 s	<75 s	TRF24	Without auxiliary switch	1400	400	1400	400									
									With auxiliary switch	1400	400	1400	400									
						230 V	75 s		TRF230	1400	400	1400	400	1400	400							
		4 Nm	■	■	24 V	75 s	<20 s		LRF24	Without auxiliary switch	1400	400	1400	400	1400	400						
With auxiliary switch	1400									400	1400	400	1400	400								
				230 V	75 s		LRF230	1400	400	1400	400	1400	400									
LRF..		10 Nm	■	■	24 V	75 s	<20 s	NRF24A	Without auxiliary switch	1400	400	1400	400	1400	400	1400	400	1400	400			
									With auxiliary switch	1400	400	1400	400	1400	400	1400	400	1400	400			
						AC 24...240 V DC 24...125 V	75 s		NRFA	1400	400	1400	400	1400	400	1400	400	1400	400			
						24 V	75 s		SRF24A	1400	400	1400	400	1400	400	1400	400	1400	400			
NRF.. SRF..		20 Nm	■	■	AC 24...240 V DC 24...125 V	75 s	<20 s	SRFA	Without auxiliary switch	1400	400	1400	400	1400	400	1400	400	1400	400			
									With auxiliary switch	1400	400	1400	400	1400	400	1400	400	1400	400			

¹⁾ Low-noise operation Δp_{max} = 200 kPa.

DN 15...50

Field of use 2-way: closed and open water circuit (pH >7)
 3-way: closed water circuit (pH >7)

Fluid temperature -10...100°C

Pipe connection Flange PN 6 (EN 1092-1/4)

Leakage rate 2-way: air-bubble tight, leakage rate A (EN 12266-1)
 3-way: path A – AB: air-bubble tight, leakage rate A (EN 12266-1) / bypass B – AB: leakage class I

Flow 3-way: bypass B – AB: approx. 50% of the K_{Vs} value

Permissible operating pressure p_s: 600 kPa



PN 6

		DN 15		DN 20		DN 25		DN 32		DN 40		DN 50		
		2-way	K _{Vs} [m³/h]	Valve type	K _{Vs} [m³/h]	Valve type	K _{Vs} [m³/h]	Valve type	K _{Vs} [m³/h]	Valve type	K _{Vs} [m³/h]	Valve type	K _{Vs} [m³/h]	Valve type
			15	R6015R-B1	32	R6020R-B1	26	R6025R-B2	32	R6032R-B3	31	R6040R-B3	49	R6050R-B3
		3-way T-bore	K _{Vs} [m³/h]	Valve type	K _{Vs} [m³/h]	Valve type	K _{Vs} [m³/h]	Valve type	K _{Vs} [m³/h]	Valve type	K _{Vs} [m³/h]	Valve type	K _{Vs} [m³/h]	Valve type
			15	R7015R-B1	32	R7020R-B1	26	R7025R-B2	32	R7032R-B3	31	R7040R-B3	49	R7050R-B3

Suitable actuators

	Nominal torque	Open/close	3-point	Fail-safe	Nominal voltage AC/DC 24 V AC 230 V	Running time motor 90°	Running time fail-safe	Actuator type	Without auxiliary switch		With auxiliary switch		Without auxiliary switch		With auxiliary switch	
									Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa
Compact actuators																
TR.. TRY..	2 Nm	■	■	—	24 V	35 s	—	TR24	600	100	600	100	—	—	—	—
		■	■	—	230 V	100 s	—	TRY24	600	100	600	100	—	—	—	—
		■	■	—	230 V	35 s	—	TRY230	600	100	600	100	—	—	—	—
Standard actuators																
LR.. NR.. SR..	5 Nm	■	■	—	24 V	90 s	—	LR24A	600	100	600	100	600	100	—	—
		■	■	—	230 V		90 s	—	LR230A	600	100	600	100	600	100	—
	10 Nm	■	■	—	24 V	90 s	—	NR24A	600	100	600	100	600	100	600	100
		■	■	—	230 V		90 s	—	NR230A	600	100	600	100	600	100	600
	20 Nm	■	■	—	24 V	90 s	—	SR24A	600	100	600	100	600	100	600	100
		■	■	—	230 V		90 s	—	SR230A	600	100	600	100	600	100	600
Very fast running actuators																
LRQ.. NRQ.. SRQ..	4 Nm	■	—	—	24 V	9 s	—	LRQ24A	600	100	600	100	600	100	—	—
	8 Nm	■	—	—	24 V	9 s	—	NRQ24A	600	100	600	100	600	100	600	100
	16 Nm	■	—	—	24 V	9 s	—	SRQ24A	600	100	600	100	600	100	600	100
Fail-safe actuators NC/NO																
TRF..	2.5 Nm	■	—	■	24 V	75 s	<75 s	TRF24	600	100	600	100	—	—	—	—
		■	—	■	230 V		<75 s	TRF230	600	100	600	100	—	—	—	—
	4 Nm	■	—	■	24 V	75 s	<20 s	LRF24	600	100	600	100	600	100	—	—
		■	—	■	230 V		<20 s	LRF230	600	100	600	100	600	100	—	—
LRF..	10 Nm	■	—	■	24 V	75 s	<20 s	NRF24A	600	100	600	100	600	100	600	100
		■	—	■	AC 24...240 V DC 24...125 V		<20 s	NRFA	600	100	600	100	600	100	600	100
	20 Nm	■	—	■	24 V	75 s	<20 s	SRF24A	600	100	600	100	600	100	600	100
		■	—	■	AC 24...240 V DC 24...125 V		<20 s	SRFA	600	100	600	100	600	100	600	100



10

Potable water valves

Certified in accordance with ACS, DVGW, WRAS, ÜA

Rotary valves Internal thread 2-way PN 25/40 **DN 15...50** 90

Please refer to the data sheets or notes for project planning for further technical data to be observed.

DN 15...50

Field of use Drinking water applications (open/close)
 Fluid temperature 5...100°C
 Pipe connection Internal thread Rp (ISO 7-1)
 Leakage rate Air-bubble tight, leakage rate A (EN 12266-1)
 Drinking water certificate ACS, DVGW, WRAS, ÜA



		PN 40								PN 25							
		DN 15		DN 15		DN 20		DN 25		DN 32		DN 40		DN 50			
		K_{vs} [m³/h]	Valve type	K_{vs} [m³/h]	Valve type	K_{vs} [m³/h]	Valve type	K_{vs} [m³/h]	Valve type	K_{vs} [m³/h]	Valve type	K_{vs} [m³/h]	Valve type	K_{vs} [m³/h]	Valve type		
2-way		16	C215QPW-N	16	R215PW-N	32	R220PW-P	40	R225PW-Q	63	R232PW-R	100	R240PW-R	150	R250PW-S		

Suitable actuators	Nominal torque	Open/close	3-point	Fail-safe	Nominal voltage AC/DC 24 V AC 230 V	Running time motor 90°	SPDT auxiliary switch	Actuator type	Δp_s kPa		Δp_{max} kPa		Δp_s kPa		Δp_{max} kPa		Δp_s kPa		Δp_{max} kPa						
									Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa	Δp_s kPa	Δp_{max} kPa							
Standard actuators																									
CQ..	10 Nm	■	■	—	24 V	75 s	1	CQ24A	1600	200															
					230 V			CQ230A	1600	200															
LR.. NR..	20 Nm	■	■	—	24 V	90 s	1	LR24A		1600	200	1600	200	1600	200										
					230 V			LR24A-S		1600	200	1600	200	1600	200										
					24 V			NR24A									1600	170							
								NR24A-S									1600	170							
SR..	40 Nm	■	■	—	24 V	90 s	1	NR230A ¹⁾							1600	170									
					230 V			NR230A-S							1600	170									
					24 V			SR24A											1600	170	1600	130			
								SR24A-S											1600	170	1600	130			
SR..	40 Nm	■	■	—	24 V	90 s	1	SR230A ¹⁾									1600	170	1600	130					
					230 V			SR230A-S										1600	170	1600	130				
Fail-safe actuators NC/NO																									
CQK..	1 Nm	■	—	■	24 V	75 s	—	CQK24A	1600	200															
					230 V			CQK230A	1600	200															
LRF..	4 Nm	■	—	■	24 V	75 s	1	LRF24		1600	200	1600	200	1600	200										
					230 V			LRF24-S		1600	200	1600	200	1600	200										
					24 V			LRF230		1600	200	1600	200	1600	200										
								LRF230-S		1600	200	1600	200	1600	200										
NRF.. SRF..	10 Nm	■	—	■	AC 24...240 V	75 s	2	NRFA							1600	170									
					DC 24...125 V			NRFA-S2							1600	170									
					24 V			SRF24A											1600	170	1600	130			
								SRF24A-S2											1600	170	1600	130			
NRF.. SRF..	20 Nm	■	—	■	AC 24...240 V	75 s	2	SRFA									1600	170	1600	130					
					DC 24...125 V			SRFA-S2										1600	170	1600	130				

¹⁾ Actuators NR230A and SR230A are also available as fast running actuators on request.

11

Open/close and changeover butterfly valves

Open/close and changeover applications

Wafer types	2-way	PN 6, 10, 16	DN 25...300	94
		PN 10, 16	DN 350	96
		PN 16	DN 400...700	96
Lug types	2-way	PN 10, 16	DN 25...150	94
		PN 16	DN 200...300	94
		PN 16	DN 350...700	96
	3-way	PN 16	DN 100...300	98
Definitions	Formula symbols			99

Please refer to the data sheets or notes for project planning for further technical data to be observed.

DN 25...300

Field of use Closed and open water circuit (pH >7)

Fluid temperature DN 25...80: -10...120°C
DN 100...150: -20...120°C
DN 200...300: -10...120°C

Pipe connection Flange (ISO 7005-2 and EN 1092-2)
D6..W additionally: ISO 7005-1 and EN 1092-1

Leakage rate Tight, leakage rate A (EN 12266-1)

Permissible operating pressure p_s: 1600 kPa

PN 6, 10, 16						PN 6, 10, 16																	
Wafer types						DN 25	DN 32	DN 40	DN 50	DN 65	DN 80	DN 100	DN 125	DN 150	DN 200	DN 250	DN 300						
K _{vmax} [m ³ /h]	Valve type	K _{vmax} [m ³ /h]	Valve type	K _{vmax} [m ³ /h]	Valve type	K _{vmax} [m ³ /h]	Valve type	K _{vmax} [m ³ /h]	Valve type	K _{vmax} [m ³ /h]	Valve type	K _{vmax} [m ³ /h]	Valve type	K _{vmax} [m ³ /h]	Valve type	K _{vmax} [m ³ /h]	Valve type	K _{vmax} [m ³ /h]	Valve type	K _{vmax} [m ³ /h]	Valve type	K _{vmax} [m ³ /h]	Valve type
50	D625N	55	D632N	65	D640N	100	D650N	170	D665N	260	D680N	690	D6100W	990	D6125W	1780	D6150W	2200	D6200W	4200	D6250W	5700	D6300W


PN 10, 16						PN 10, 16												PN 16					
Lug types						DN 25	DN 32	DN 40	DN 50	DN 65	DN 80	DN 100	DN 125	DN 150	DN 200	DN 250	DN 300						
K _{vmax} [m ³ /h]	Valve type	K _{vmax} [m ³ /h]	Valve type	K _{vmax} [m ³ /h]	Valve type	K _{vmax} [m ³ /h]	Valve type	K _{vmax} [m ³ /h]	Valve type	K _{vmax} [m ³ /h]	Valve type	K _{vmax} [m ³ /h]	Valve type	K _{vmax} [m ³ /h]	Valve type	K _{vmax} [m ³ /h]	Valve type	K _{vmax} [m ³ /h]	Valve type	K _{vmax} [m ³ /h]	Valve type	K _{vmax} [m ³ /h]	Valve type
50	D625NL	55	D632NL	65	D640NL	100	D650NL	170	D665NL	260	D680NL	690	D6100WL	990	D6125WL	1780	D6150WL	2200	D6200WL	4200	D6250WL	5700	D6300WL

Suitable actuators	Nominal torque	Open/close	3-point	Communicative	Terminal connection	Fail-safe	Nominal voltage AC/DC 24 V AC 230 V	Running time motor 90°	SPDT auxiliary switch	Degree of protection	Actuator type	Linkage type	ZJR03 ⁴⁾		ZJR03 / ZPR03 ⁴⁾		ZJR01 / ZPR01		ZJR01 / ZPR01		ZPR01		ZPR01		ZPR01															
													Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa				
Standard actuators																																								
SR..	20 Nm	■	■	■	■	24 V	90 s	IP54	■	■	SR24A-5	ZJR03	1200	300	1200	300	1200	300	1200	300																				
													1200	300	1200	300	1200	300	1200	300	1200	300																		
GR..	40 Nm	■	■	■	■	24 V	150 s	IP54	■	■	GR24A-5	ZJR03	1200	300	1200	300	1200	300	1200	300	1200	300																		
													1200	300	1200	300	1200	300	1200	300	1200	300	1200	300																
JR..	90 Nm	■	■	■	■	AC 24...240 V DC 24...125 V	35 s	2	IP66/ IP67	■	JRCA-S2-T	ZJR03 / ZPR03	1200	300	1200	300	1200	300	1400	300	1400	300							1400	300										
SRF..	160 Nm	■	■	■	■	AC 24...240 V DC 24...125 V	35 s ²⁾	2	IP66/ IP67	■	PRCA-S2-T	ZPR01																1400	300											
																																					1400	300		
Fail-safe actuators NC/NO																																								
GRK..	20 Nm	■	■	■	■	24 V	75 s	2	IP54	■	SRF24A-5	ZJR03	1200	300	1200	300	1200	300	1200	300																				
													1200	300	1200	300	1200	300	1200	300	1200	300																		
													1200	300	1200	300	1200	300	1200	300	1200	300																		
													1200	300	1200	300	1200	300	1200	300	1200	300																		
PRK..	40 Nm	■	■	■	■	4 V	150 s	2	IP54	■	GRK24A-5	ZJR03	1200	300	1200	300	1200	300	1200	300	1200	300																		
													1200	300	1200	300	1200	300	1200	300	1200	300																		
													1200	300	1200	300	1200	300	1200	300	1200	300																		
													1200	300	1200	300	1200	300	1200	300	1200	300																		
PRK..	160 Nm	■ ³⁾	■ ³⁾	■	■	AC 24...240 V DC 24...125 V	35 s ²⁾	2	IP66/ IP67	■	PRKCA-BAC-S2-T	ZPR01																	1400	300										
																																					1400	300		

¹⁾ These products are also available as IP66 variant with protective housing.
²⁾ 30...120 s configurable with Belimo Assistant 2.
³⁾ Configurable with Belimo Assistant 2.
⁴⁾ Linkage is required only in combination with a JR or PR actuator


DN 350...700

Field of use	Closed and open water circuit (pH >7)
Fluid temperature	-10...120°C
Pipe connection	Flange (ISO 7005-2 and EN 1092-2)
Leakage rate	Tight, leakage rate A (EN 12266-1)
Permissible operating pressure	p _s : 1600 kPa

Suitable actuators	Nominal torque	Open/close	3-point	Terminal connection	Nominal voltage AC 230 V	Running time motor 90°	SPDT auxiliary switch	Degree of protection	Actuator type	Linkage type		PN 10, 16		PN 16		PN 16		PN 16		PN 16					
										ZSY-703		ZSY-401		ZSY-701		ZSY-702		ZSY-702		ZSY-901		ZSY-902		ZSY-903	
										Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa	Δp _s kPa	Δp _{max} kPa
Fast running actuators																									
SY.. 	650 Nm	■	■	■	230 V	31 s	2	IP67	SY6-230-3-T	600	300			600	300										
	1000 Nm	■	■	■		55 s	2	IP67	SY7-230A-3-T			1200	300			1200	300								
	1500 Nm	■	■	■		55 s	2	IP67	SY8-230A-3-T							1200	300								
	2000 Nm	■	■	■		70 s	2	IP67	SY9-230A-3-T									1200	300						
	2500 Nm	■	■	■		70 s	2	IP67	SY10-230A-3-T											600	300				
	3500 Nm	■	■	■		70 s	2	IP67	SY12-230A-3-T											1000	300	200	200		

DN 100...300

Field of use	Closed and open water circuit (pH >7) for changeover applications
Fluid temperature	-10...120°C D7..WL/BAC DN 100...150: -20...120°C
Pipe connection	Flange (ISO 7005-1/2 and EN 1092-1/2) D7..WL/BAC additionally: ISO 7005-1 and EN 1092-1
Leakage rate	Tight, leakage rate A (EN 12266-1)
Permissible operating pressure	p _s : 1600 kPa

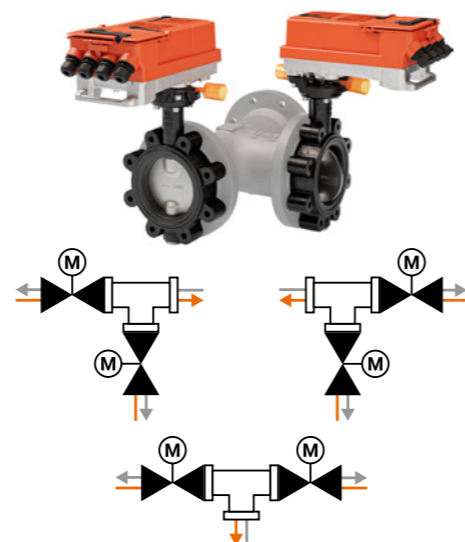

Definitions

Formula symbols

- K_v** The flow coefficient K_v [m³/h] is the specific flow of a valve at a defined angle with reference to 100 kPa (1 bar). The K_v value changes, depending on the valve position. The flow coefficient is determined for a water temperature of 5...40°C.
- K_{vs}** The K_v value in reference to the nominal angle is referred to as the K_{vs} value. The nominal angle defines the maximum valve opening and is specified by the manufacturer.
 - Characterised control valves (CCV): Flow coefficient at 100% valve opening (90° angle of rotation)
 - Zone valves (QCV): Flow coefficient with corresponding position of the end stop clip (variable)
 - Globe valves: Flow coefficient at 100% valve opening
 - Butterfly valves: Flow coefficient at 60% valve opening for control application

$$K_{vs} = \frac{V'_{100}}{\sqrt{\frac{\Delta p_{v100}}{100}}}$$

Δp_{v100} [kPa]
V'₁₀₀ [m³/h]
K_{vs} [m³/h]

- K_{vmax}** Flow coefficient for 100% opened butterfly valve for open/close and changeover application.
- V'_{nom}** Maximum possible flow rate of a pressure-independent valve, catalogue value, delivery condition.
- V'_{max}** Set maximum flow of a pressure-independent valve with the greatest control signal, e.g. 10 V.
- Δp_{max}** Maximum permissible differential pressure for long service life across control path A – AB, with reference to the whole opening range.
- Δp_{v100}** (R4..D(K)) Maximum permissible differential pressure for long service life with valve completely open.
- Δp_{v0}** (R4..D(K)) Maximum permissible differential pressure for long service life with closed valve.
- Δp_s** Maximum close-off pressure at which the valve can still seal tight, with reference to the particular leakage class.
- p_s** Permissible operating pressure

PN	DN	K _{vmax} [m ³ /h] ¹⁾	Open/close ²⁾	Modulating (2...10 V / 0.5...10 V) ²⁾	Communication BACnet MS/TP ²⁾	Communication Modbus RTU ²⁾	Communication MP-Bus ²⁾	Nominal voltage	Running time motor 90° ³⁾	SPDT auxiliary switch	Degree of protection	Changeover butterfly valve type with actuator	Δp _s kPa	Δp _{max} kPa	T-piece type
With communicative actuator															
D7..L/BAC	16	100	530	■	■	■	■	AC 24...240 V DC 24...125 V	35 s	4	IP66/ IP67	D7100NL/BAC ^{4) 5)}	1400	300	ZD7100 ⁶⁾
		125	950	■	■	■	■		35 s	4	IP66/ IP67	D7125WL/BAC ⁴⁾	1400	300	ZD7125 ⁶⁾
		150	1380	■	■	■	■		35 s	4	IP66/ IP67	D7150WL/BAC ⁴⁾	1400	300	ZD7150 ⁶⁾
		200	1800	■	■	■	■		35 s	4	IP66/ IP67	D7200WL/BAC ⁴⁾	1400	300	ZD7200 ⁶⁾
		250	3000	■	■	■	■		35 s	4	IP66/ IP67	D7250WL/BAC ⁴⁾	1400	300	ZD7250 ⁶⁾
		300	4700	■	■	■	■		35 s	4	IP66/ IP67	D7300WL/BAC ⁴⁾	1400	300	ZD7300 ⁶⁾

Suitable T-pieces



Spheroidal graphite cast iron with fastening screws

¹⁾ For changeover applications. The maximum flow speed of 4 m/s may not be exceeded in the changeover butterfly valve.
²⁾ Configurable with Belimo Assistant 2.
³⁾ 30...120 s configurable with Belimo Assistant 2.
⁴⁾ The T-piece is not included in the scope of delivery.
⁵⁾ The changeover butterfly valve type with actuator D7150NL/BAC will be replaced by the new type D7150WL/BAC over the course of the year.
⁶⁾ The necessary fastening screws and nuts are included in the scope of delivery.

All inclusive.

Belimo is the global market leader in the development, production, and sales of field devices for the energy-efficient control of heating, ventilation and air-conditioning systems. The focus of our core business is on damper actuators, control valves, sensors and meters.

Always focusing on customer value, we deliver more than only products. We offer you the complete product range for the regulation and control of HVAC systems from a single source. At the same time, we rely on tested Swiss quality with a five-year warranty. Our worldwide representatives in over 80 countries guarantee short delivery times and comprehensive support through the entire product life. Belimo does indeed include everything.

The "small" Belimo devices have a big impact on comfort, energy efficiency, safety, installation and maintenance.

In short: Small devices, big impact.



5-year warranty



On site around the globe



Complete product range



Tested quality



Short delivery times



Comprehensive support

BELIMO Automation AG

Brunnenbachstrasse 1, 8340 Hinwil, Switzerland
+41 43 843 61 11, info@belimo.ch, www.belimo.com

BELIMO[®]