


2-way, Characterized Control Valve, Stainless Steel Ball and Stem









Type overview	
Туре	DN
B265	65

## **Technical data**

### **Functional data**

2.5" [65]
chilled or hot water, up to 60% glycol
0212°F [-18100°C]
400 psi
100 psi
equal percentage
Internal thread
NPT (female)
maintenance-free
2-way
0% for A – AB
75°
210
Nickel-plated brass body
stainless steel
EPDM (lubricated)

# Materials

Valve body	Nickel-plated brass body	
Stem	stainless steel	
Stem seal	EPDM (lubricated)	
Seat	PTFE	
Characterized disc	No Disc (full flow)	
O-ring	EPDM (lubricated)	
Ball	stainless steel	
Non-Spring	ARB(X)	

# **Suitable actuators**

Non-Spring	ARB(X)
Spring	ΔERR(X)

# Safety notes



WARNING: This product can expose you to lead which is known to the State of California to cause cancer and reproductive harm. For more information go to www.p65warnings.ca.gov

# **Product features**

## Application


This valve is typically used in air handling units on heating or cooling coils, and fan coil unit heating or cooling coils. Some other common applications include Unit Ventilators, VAV box reheat coils and bypass loops. This valve is suitable for use in a hydronic system with variable flow.




# Flow/Mounting details


Two-way valves should be installed with the


,	disc upstream.	$A\toAB$	0%		A → AB 100%	1		
Dimensions								
Туре	DN				Weight			
B265	65				8.1 lb [3.7 kg]			
	ARB, ARX		D H2			C		
	Α		В	С	D	E	F	H1
	10.1'	' [257] !	5.6" [141]	8.0" [203]	6.0" [152]	2.8" [71]	2.8" [71]	1.9" [48]
			o I					

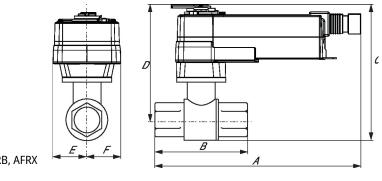

AFRB, AFRX

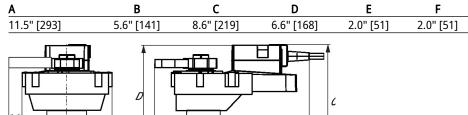







ARQB, ARQX

Α	В	С	D	E	F	H1	H2
9.9" [251]	4.2" [107]	8.1" [206]	6.1" [155]	2.3" [58]	2.3" [58]	0.8" [20]	0.6" [15]



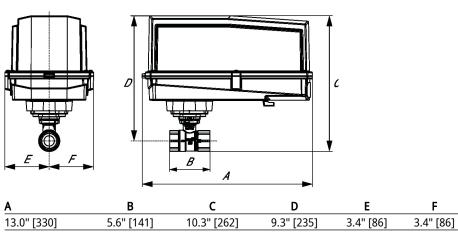

AFRB N4, AFRX N4

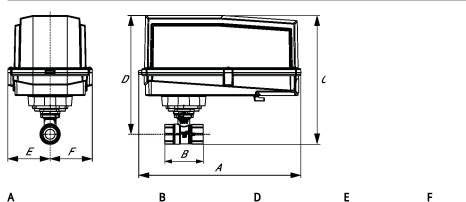

ARB N4, ARX N4, NRB N4, NRX N4

Α	В	D	E	F
11.4" [289]	5.6" [141]	8.0" [203]	3.1" [80]	3.1" [80]



On/Off, Spring return, 24...240 V



Technical data		
Electrical data	Nominal voltage	AC 24240 V / DC 24125 V
	Nominal voltage frequency	50/60 Hz
	Nominal voltage range	AC 19.2264 V / DC 21.6137.5 V
	Power consumption in operation	7 W
	Power consumption in rest position	3.5 W
	Transformer sizing	18 VA
	Electrical Connection	18 GA appliance cable, 3 ft [1 m], with 1/2" NPT conduit connector
	Overload Protection	electronic throughout 095° rotation
Functional data	Direction of motion motor	selectable by ccw/cw mounting
	Direction of motion fail-safe	reversible with cw/ccw mounting
	Manual override	5 mm hex crank (3/16" Allen), supplied
	Angle of rotation	90°
	Running Time (Motor)	75 s / 90°
	Running time fail-safe	<20 s
	Noise level, motor	45 dB(A)
	Noise level, fail-safe	62 dB(A)
	Position indication	Mechanical
Safety data	Power source UL	Class 2 Supply
	Degree of protection IEC/EN	IP54
	Degree of protection NEMA/UL	NEMA 2
	Enclosure	UL Enclosure Type 2
	Agency Listing	cULus acc. to UL60730-1A/-2-14, CAN/CSA E60730-1:02
		CE acc. to 2014/30/EU and 2014/35/EU
	Quality Standard	ISO 9001
	UL 2043 Compliant	Suitable for use in air plenums per Section 300.22(C) of the NEC and Section 602 of the IMC
	Ambient humidity	Max. 95% RH, non-condensing
	Ambient temperature	-22122°F [-3050°C]
	Storage temperature	-40176°F [-4080°C]
	Servicing	maintenance-free
Weight	Weight	5.4 lb [2.4 kg]
Materials	Housing material	Galvanized steel and plastic housing



### **Technical data**

Footnotes †Rated Impulse Voltage 800V, Type of action 1.AA, Control Pollution Degree 3

## **Electrical installation**

# **X** INSTALLATION NOTES

Actuators with appliance cables are numbered.

(UP) Universal Power Supply (UP) models can be supplied with AC 24...240 V, or DC 24...125 V.

Provide overload protection and disconnect as required.

🔬 Actuators may be powered in parallel. Power consumption must be observed.

Parallel wiring required for piggy-back applications.

Meets cULus requirements without the need of an electrical ground connection.

# Warning! Live electrical components!

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

# Wiring diagrams On/Off 24 to 240 VAC Line Wht N Volts Blk L Wht (1) Blk (2) Neutral Load