

# Rotary actuator fail-safe for adjusting dampers in technical building installations

- Air damper size up to approx. 2 m<sup>2</sup>
- Torque motor 10 Nm
- Nominal voltage AC 24...240 V / DC 24...125 V
- Control Open/close
- With 2 integrated auxiliary switches
- PWIS/LABS-compliant according to VDMA 24364



## **Technical data**

Electrical data	Nominal voltage	AC 24240 V / DC 24125 V
	Nominal voltage frequency	50/60 Hz
	Nominal voltage range	AC 19.2264 V / DC 21.6137.5 V
	Power consumption in operation	6 W
	Power consumption in rest position	2.5 W
	Power consumption for wire sizing	9.5 VA
	Auxiliary switch	2x SPDT, 1x 10% / 1x 11100%
	Switching capacity auxiliary switch	1 mA3 A (0.5 A inductive), DC 5 VAC 250 V
	Connection supply / control	Cable 1 m, 2x 0.75 mm <sup>2</sup>
	Connection auxiliary switch	Cable 1 m, 6x 0.75 mm <sup>2</sup>
	Parallel operation	Yes (note the performance data)
	_	

#### **Functional data**

Torque motor	10 Nm
Torque fail-safe	10 Nm
Direction of motion motor	selectable by mounting L/R
Direction of motion fail-safe	selectable by mounting L/R
Manual override	by means of hand crank and locking switch
Angle of rotation	Max. 95°
Angle of rotation note	adjustable starting at 33% in 2.5% steps (with mechanical end stop)
Running time motor	75 s / 90°
Running time fail-safe	<20 s @ -2050°C / <60 s @ -30°C
Sound power level, motor	45 dB(A)
Mechanical interface	Universal shaft clamp 1025.4 mm
Position indication	Mechanical
Service life	Min. 60'000 fail-safe positions
Protection class IEC/EN	II. reinforced insulation

## Safety data

Protection class IEC/EN	II, reinforced insulation	
Protection class UL	II, reinforced insulation	
Protection class auxiliary switch IEC/EN	II, reinforced insulation	
Degree of protection IEC/EN	IP54	
Degree of protection NEMA/UL	NEMA 2	
Enclosure	UL Enclosure Type 2	
EMC	CE according to 2014/30/EU	
Low voltage directive	CE according to 2014/35/EU	
Certification IEC/EN	IEC/EN 60730-1 and IEC/EN 60730-2-14	
-	·	



#### **Technical data**

UL Approval	cULus according to UL60730-1A, UL60730-2-14 and CAN/CSA E60730-1 The UL marking on the actuator depends on the production site, the device is UL-compliant in any case	
PWIS/LABS-conformity	According to VDMA 24364 (test class C1) Approved for use in zone II Cleaning with low-pressure plasma treatment	
Hygiene test	According to VDI 6022 Part 1 / SWKI VA 104-01, cleanable and disinfectable, low emission	
Type of action	Type 1.AA.B	
Rated impulse voltage supply / control	4 kV	
Rated impulse voltage auxiliary switch	2.5 kV	
Pollution degree	3	
Ambient humidity	Max. 95% RH, non-condensing	
Ambient temperature	-3050°C [-22122°F]	
Storage temperature	-1040°C [14104°F]	
Servicing	maintenance-free	
Weight	2.2 kg	

#### Safety notes



Weight

Safety data

- This device has been designed for use in stationary heating, ventilation and air-conditioning systems and must not be used outside the specified field of application, especially in aircraft or in any other airborne means of transport.
- Outdoor application: only possible in case that no (sea) water, snow, ice, insolation or
  aggressive gases interfere directly with the device and that it is ensured that the ambient
  conditions remain within the thresholds according to the data sheet at any time.
- · Caution: Power supply voltage!
- Only authorised specialists may carry out installation. All applicable legal or institutional installation regulations must be complied with during installation.
- The device may only be opened at the manufacturer's site. It does not contain any parts that can be replaced or repaired by the user.
- Cables must not be removed from the device.
- To calculate the torque required, the specifications supplied by the damper manufacturers
  concerning the cross-section and the design, as well as the installation situation and the
  ventilation conditions must be observed.
- The two switches integrated in the actuator are to be operated either on power supply voltage or at safety extra-low voltage. The combination power supply voltage/safety extra-low voltage is not permitted.
- The device contains electrical and electronic components and must not be disposed of as household refuse. All locally valid regulations and requirements must be observed.
- PWIS/LABS-conformity is guaranteed as long as the packaging is unopened. Once the PWIS/ LABS-compliant packaging has been opened, the proper handling of the products is the responsibility of the customer. PWIS/LABS-conformity of unopened products is guaranteed for a period of one year after cleaning, provided they are handled properly, professionally and cleanly. Proof of proper, professional and clean handling is the responsibility of the purchaser. Ensure that the required cleanliness of the products is maintained. Do not touch the products with bare hands. Belimo accepts no liability for the consequences resulting from the contamination of a product caused by the customer.



#### **Product features**

**Operating mode** The actuator is equipped with a universal power supply module that can utilise supply

voltages of AC 24...240 V and DC 24...125V.

The actuator moves the damper to the operating position at the same time as tensioning the return spring. The damper is turned back to the fail-safe position by spring force when the

supply voltage is interrupted.

Simple direct mounting Simple direct mounting on the damper shaft with a universal shaft clamp, supplied with an

anti-rotation device to prevent the actuator from rotating.

Manual override By using the hand crank the damper can be actuated manually and engaged with the locking

switch at any position. Unlocking is carried out manually or automatically by applying the

operating voltage.

**Adjustable angle of rotation** Adjustable angle of rotation with mechanical end stops.

Flexible signalling The actuator has one auxiliary switch with a fixed setting and one adjustable auxiliary switch.

They permit a 10% or 11...100% angle of rotation to be signaled.

#### Accessories

Electrical accessories	Description	Туре
	Auxiliary switch 2x SPDT	S2A-F
	Feedback potentiometer 1 $k\Omega$	P1000A-F
Mechanical accessories	Description	Туре
	Shaft extension 240 mm ø20 mm for damper shaft ø822.7 mm	AV8-25
	End stop indicator	IND-AFB
	Shaft clamp reversible, for central mounting, for damper shafts ø12.7 /	K7-2
	19.0 / 25.4 mm	
	Ball joint suitable for damper crank arm KH8 / KH10	KG10A
	Ball joint suitable for damper crank arm KH8	KG8
	Damper crank arm Slot width 8.2 mm, clamping range ø1018 mm	KH8
	Actuator arm, for 3/4" shafts, clamping range ø1022 mm, Slot width 8.2 mm	KH-AFB
	Form fit insert 10x10 mm, Multipack 20 pcs.	ZF10-NSA-F
	Form fit insert 12x12 mm, Multipack 20 pcs.	ZF12-NSA-F
	Form fit insert 15x15 mm, Multipack 20 pcs.	ZF15-NSA-F
	Form fit insert 16x16 mm, Multipack 20 pcs.	ZF16-NSA-F
	Mounting kit for linkage operation for flat and side installation	ZG-AFB
	Baseplate extension	Z-SF
	Anti-rotation mechanism 230 mm, Multipack 20 pcs.	Z-ARS230L

#### **Electrical installation**



Caution: Power supply voltage!

Hand crank 63 mm

Parallel connection of other actuators possible. Observe the performance data.

#### Wire colours:

1 = blue

2 = brown

S1 = violet

S2 = red

S3 = white

S4 = orange

S5 = pink

S6 = grey


ZKN2-B




#### **Electrical installation**


#### Wiring diagrams

AC 24...240 V / DC 24...125 V, open/ Auxiliary switch





## **Operating controls and indicators**

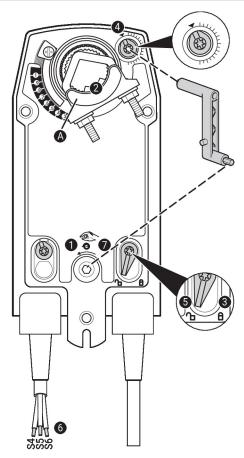

## **Auxiliary switch settings**

A

**Note:** Perform settings on the actuator only in deenergised state.

For the auxiliary switch position settings, carry out points 1 to 2 successively.

Manual override

Turn the hand crank until the desired switching position is set.

2 Shaft clamp

Edge line A displays the desired switching position of the actuator on the scale.

3 Fasten the locking device

Turn the locking switch to the "Locked padlock" symbol.

4 Auxiliary switch

Turn rotary knob until the notch points to the arrow symbol.

5 Unlock the locking device

Turn the locking switch to the "Unlocked padlock" symbol or unlock with the hand crank.

6 Cable

Connect continuity tester to S4 + S5 or to S4 + S6.


7 Manual override

Turn the hand crank until the desired switching position is set and check whether the continuity tester shows the switching point.





## **Dimensions**

## Spindle length



# Clamping range



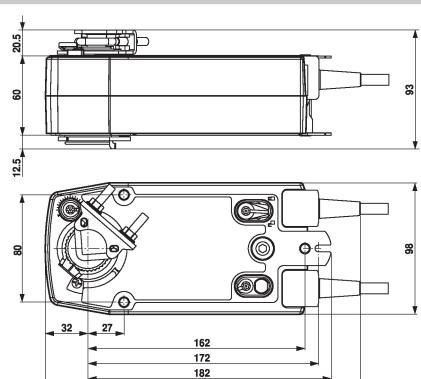

236