

2-way, Characterized Control Valve, Chrome Plated Brass Ball and Nickel Plated Brass Stem







Type overview	
Туре	DN
B213B	15

Technical data			
	Functional data	Valve size [mm]	0.5" [15]

Fluid	chilled or hot water, up to 60% glycol	
Fluid Temp Range (water)	0250°F [-18120°C]	
Body Pressure Rating	600 psi	
Close-off pressure Δps	200 psi	
Flow characteristic	equal percentage	
Leakage rate	0% for A – AB	
Pipe connection	Internal thread	
	NPT (female)	
Servicing	maintenance-free	
Flow Pattern	2-way	
Controllable flow range	75°	
Cv	4.7	
Valve body	Nickel-plated brass body	
Stem	nickel-plated brass	
Stem seal	EPDM (lubricated)	
Seat	PTFE	
Characterized disc	TEFZEL®	
O-ring	EPDM (lubricated)	
Ball	chrome plated brass	
Non Fail-Safe	TR	
	LRB(X)	
Spring	TFRB(X)	
	LF	

Safety notes



Suitable actuators

Materials

 WARNING: This product can expose you to lead which is known to the State of California to cause cancer and reproductive harm. For more information go to www.p65warnings.ca.gov




Product features

Application

This valve is typically used in air handling units on heating or cooling coils, and fan coil unit heating or cooling coils. Some other common applications include Unit Ventilators, VAV box re-heat coils and bypass loops. This valve is suitable for use in a hydronic system with variable flow.


Flow/Mounting details



Two-way valves should be installed with the disc upstream.


Dimensions

Туре	DN	Weight	
B213B	15	0 66 lb [0 30 kg]	

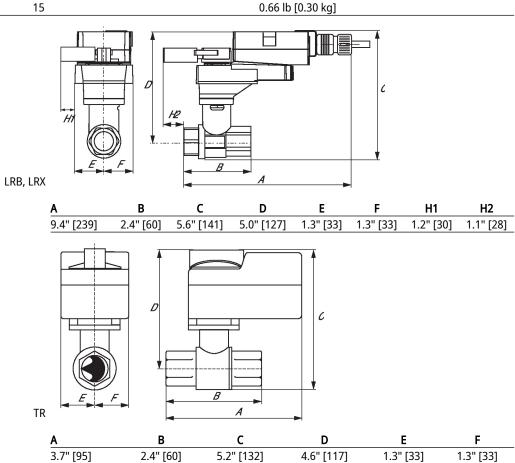



Dimensions

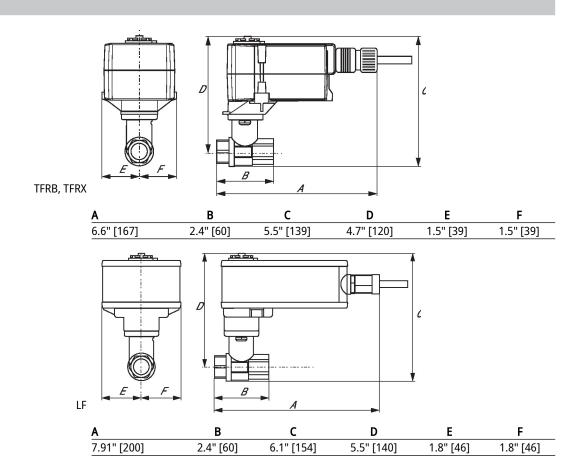



Modulating, Non fail-safe, 24 V







Nominal voltage	AC/DC 24 V
Nominal voltage frequency	50/60 Hz
Nominal voltage range	AC 19.228.8 V / DC 21.628.8 V
Power consumption in operation	0.5 W
Transformer sizing	1 VA
Electrical Connection	Plenum cable 18 GA, 10 ft [3 m]
Overload Protection	electronic throughout full rotation
Operating range Y	210 V
Operating range Y note	420 mA w/ ZG-R01 (500 Ω, 1/4 W resistor)
Input impedance	100 k Ω for 210 V (0.1 mA), 500 Ω for 420 mA
Direction of motion motor	selectable with switch
Manual override	push down handle
Angle of rotation	90°
Running Time (Motor)	90 s / 90°
Noise level, motor	35 dB(A)
Position indication	integrated into handle
Power source UL	Class 2 Supply
Degree of protection IEC/EN	IP40
Degree of protection NEMA/UL	NEMA 1
Enclosure	UL Enclosure Type 1
Agency Listing	cULus acc. to UL60730-1A/-2-14, CAN/CSA E60730-1:02
	CE acc. to 2014/30/EU and 2014/35/EU
	ISO 9001
UL 2043 Compliant	Suitable for use in air plenums per Section 300.22(C) of the NEC and Section 602 of the IMC
Ambient humidity	Max. 95% RH, non-condensing
Ambient temperature	-22122°F [-3050°C]
Storage temperature	-40176°F [-4080°C]
Servicing	maintenance-free
Weight	0.70 lb [0.32 kg]
	Nominal voltage frequency Nominal voltage range Power consumption in operation Transformer sizing Electrical Connection Overload Protection Operating range Y Operating range Y note Input impedance Direction of motion motor Manual override Angle of rotation Running Time (Motor) Noise level, motor Position indication Power source UL Degree of protection IEC/EN Degree of protection NEMA/UL Enclosure Agency Listing Quality Standard UL 2043 Compliant Ambient humidity Ambient temperature Storage temperature Servicing



Accessories

Electrical accessories	Description	Туре
	Battery backup system, for non-spring return models	NSV24 US
	Battery, 12 V, 1.2 Ah (two required)	NSV-BAT

Electrical installation

X INSTALLATION NOTES

Provide overload protection and disconnect as required.

Actuators may also be powered by DC 24 V.

6 Only connect common to negative (-) leg of control circuits.

 \bigwedge A 500 Ω resistor (ZG-R01) converts the 4...20 mA control signal to 2...10 V.

Actuators may be connected in parallel if not mechanically linked. Power consumption and input impedance must be observed.

Meets cULus requirements without the need of an electrical ground connection.

Warning! Live electrical components!

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

Wiring diagrams

