


#### 2-way, Characterized Control Valve, Stainless Steel Ball and Stem





5-year warranty



Type overview	
Туре	DN
B213	15

# Technical data

Functional data	Valve size [mm]	0.5" [15]
	Fluid	chilled or hot water, up to 60% glyco
	Fluid Temp Range (water)	0250°F [-18120°C]
	Body Pressure Rating	600 psi
	Close-off pressure ∆ps	200 psi
	Flow characteristic	equal percentage
	Leakage rate	0% for A – AB
	Pipe connection	Internal thread
		NPT (female)
	Servicing	maintenance-free
	Flow Pattern	2-way
	Controllable flow range	75°
	Cv	4.7
Materials \	Valve body	Nickel-plated brass body
	Stem	stainless steel
	Stem seal	EPDM (lubricated)
	Seat	PTFE
	Characterized disc	TEFZEL®
	O-ring	EPDM (lubricated)
	Ball	stainless steel
Suitable actuators	Non Fail-Safe	TR
		LRB(X)
		LRQB(X)
		NRB(X) N4
	Spring	TFRB(X)
		LF

## Safety notes



• WARNING: This product can expose you to lead which is known to the State of California to cause cancer and reproductive harm. For more information go to www.p65warnings.ca.gov




#### **Product features**

#### **Application**


This valve is typically used in air handling units on heating or cooling coils, and fan coil unit heating or cooling coils. Some other common applications include Unit Ventilators, VAV box re-heat coils and bypass loops. This valve is suitable for use in a hydronic system with variable flow.

## Flow/Mounting details




Two-way valves should be installed with the disc upstream.

Dimensions		
Туре	DN	Weight
B213	15	0.65 lb [0.30 kg]

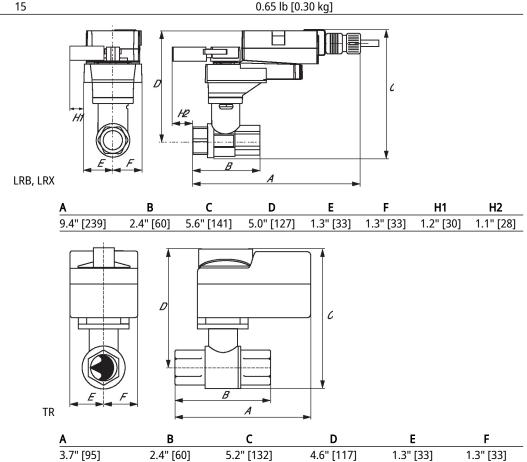



## **Dimensions**

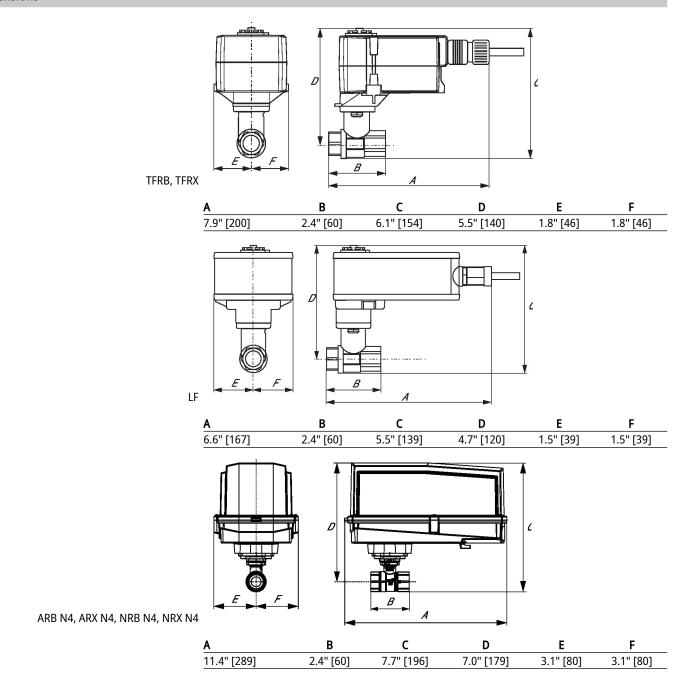









_		
Tack	anical	l data
	шиа	I CIAIA

El	ectr	ical	dat	:a

Nominal voltage	AC 100240 V	
Nominal voltage frequency	50/60 Hz	
Nominal voltage range	AC 85265 V	
Power consumption in operation	2.5 W	
Power consumption in rest position	1.3 W	
Transformer sizing	5 VA	
Auxiliary switch	1x SPDT, 1 mA3 A (0.5 A inductive), DC 5 VAC 250 V, adjustable 095°	
Switching capacity auxiliary switch	1 mA3 A (0.5 A inductive), DC 5 VAC 250 V	
Electrical Connection	(2) 18 GA appliance cables, 1 m, 3 m or 5 m, with 1/2" NPT conduit connectors	
Overload Protection	electronic throughout 095° rotation	
Position feedback U note	No Feedback	

## **Functional data**

Position feedback U note	No Feedback
Direction of motion motor	selectable by ccw/cw mounting
Direction of motion fail-safe	reversible with cw/ccw mounting
Angle of rotation	Max. 95°
Angle of rotation note	adjustable with mechanical stop
Running Time (Motor)	75 s
Running time fail-safe	<75 s @ 20°C
Noise level, motor	50 dB(A)
Noise level, fail-safe	50 dB(A)
Position indication	Mechanical
- · · · ·	

## Safety data

Power source UL	Class 2 Supply
Degree of protection IEC/EN	IP42
Degree of protection NEMA/UL	NEMA 2
Enclosure	UL Enclosure Type 2
Agency Listing	cULus acc. to UL60730-1A/-2-14, CAN/CSA E60730-1:02, CE acc. to 2014/30/EU
Quality Standard	ISO 9001
UL 2043 Compliant	Suitable for use in air plenums per Section 300.22(C) of the NEC and Section 602 of the IMC
Ambient humidity	Max. 95% RH, non-condensing
Ambient temperature	-22122°F [-3050°C]
Storage temperature	-40176°F [-4080°C]
Servicing	maintenance-free
Weight	1.6 lb [0.70 kg]

Weight

Materials

Housing material UL94-5VA



Footnotes †Rated Impulse Voltage 800V, Type of action 1.AA, Control Pollution Degree 3

#### **Electrical installation**

# INSTALLATION NOTES

A Actuators with appliance cables are numbered.

Nerovide overload protection and disconnect as required.

Actuators may be connected in parallel. Power consumption and input impedance must be observed.

One built-in auxiliary switch (1x SPDT), for end position indication, interlock control, fan startup, etc.

Apply only AC line voltage or only UL-Class 2 voltage to the terminals of auxiliary switches.

Mixed or combined operation of line voltage/safety extra low voltage is not allowed.

Meets cULus requirements without the need of an electrical ground connection.

#### Warning! Live electrical components!

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

#### Wiring diagrams On/Off

