

2-way, Characterized Control Valve, Chrome Plated Brass Ball and Nickel Plated Brass Stem







Type overview	
Туре	DN
B220B	20

Technical d	ata
-------------	-----

Functional data	Valve size [mm]	0.75" [20]
	Fluid	chilled or hot water, up to 60% glycol
	Fluid Temp Range (water)	0250°F [-18120°C]
	Body Pressure Rating	600 psi
	Close-off pressure ∆ps	200 psi
	Flow characteristic	equal percentage
	Leakage rate	0% for A – AB
	Pipe connection	Internal thread
		NPT (female)
	Servicing	maintenance-free
	Flow Pattern	2-way
	Controllable flow range	75°
	Cv	14
	No Characterized Disc	TRUE
Materials	Valve body	Nickel-plated brass body
	Stem	nickel-plated brass
	Stem seal	EPDM (lubricated)
	Seat	PTFE
	Characterized disc	TEFZEL®
	O-ring	EPDM (lubricated)
	Ball	chrome plated brass
Suitable actuators	Non Fail-Safe	TR
		LRB(X)
	Spring	TFRB(X)
		LF

# Safety notes



 $\bullet \ \ \text{WARNING: This product can expose you to lead which is known to the State of California to}\\$  $cause\ cancer\ and\ reproductive\ harm.\ For\ more\ information\ go\ to\ www.p65warnings.ca.gov$ 




### **Product features**

## **Application**

This valve is typically used in air handling units on heating or cooling coils, and fan coil unit heating or cooling coils. Some other common applications include Unit Ventilators, VAV box re-heat coils and bypass loops. This valve is suitable for use in a hydronic system with variable flow.


## Flow/Mounting details



Two-way valves should be installed with the disc upstream.

## **Dimensions**

Туре	DN	Weight	
B220B	20	0.74 lb [0.34 kg]	

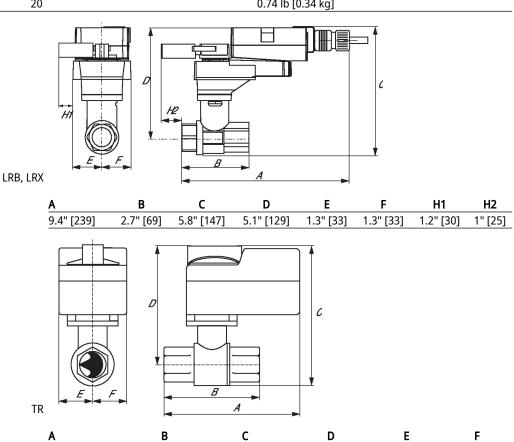

5.39" [137]

5.1" [129]

2.7" [69]


4.0" [102]

1.3" [33]

1.3" [33]



# **Dimensions**

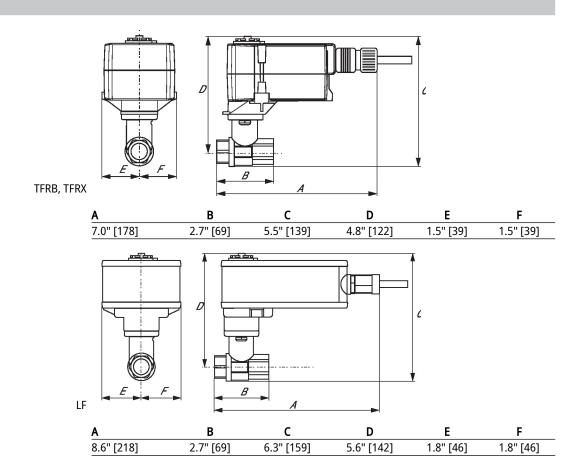



# Floating point, Spring return, 24 V







Technical dat			La	·u	atu
---------------	--	--	----	----	-----

Electrical data	Nominal voltage	AC/DC 24 V
	Nominal voltage frequency	50/60 Hz
	Nominal voltage range	AC 19.228.8 V / DC 21.628.8 V
	Power consumption in operation	2.5 W
	Power consumption in rest position	1 W
	Transformer sizing	4 VA
	Electrical Connection	18 GA plenum cable, 3 ft [1 m], with 1/2" NPT conduit connector
	Overload Protection	electronic throughout 095° rotation
Functional data	Position feedback U note	No Feedback
	Direction of motion motor	selectable with switch 0/1
	Direction of motion fail-safe	reversible with cw/ccw mounting
	Angle of rotation	Max. 95°
	Running Time (Motor)	95 s
	Running time fail-safe	<25 s @ 20°C
	Noise level, motor	35 dB(A)
	Noise level, fail-safe	62 dB(A)
	Position indication	Mechanical
Safety data	Power source UL	Class 2 Supply
	Degree of protection IEC/EN	IP42
	Degree of protection NEMA/UL	NEMA 2
	Enclosure	UL Enclosure Type 2
	Agency Listing	cULus acc. to UL60730-1A/-2-14, CAN/CSA E60730-1:02, CE acc. to 2014/30/EU
	Quality Standard	ISO 9001
	UL 2043 Compliant	Suitable for use in air plenums per Section 300.22(C) of the NEC and Section 602 of the IMC
	Ambient humidity	Max. 95% RH, non-condensing
	Ambient temperature	-22122°F [-3050°C]
	Storage temperature	-40176°F [-4080°C]
	Servicing	maintenance-free
Weight	Weight	1.3 lb [0.59 kg]
Materials		



#### **Technical data**

Footnotes †Rated Impulse Voltage 800V, Type of action 1.AA, Control Pollution Degree 3

### **Electrical installation**

### **INSTALLATION NOTES**

1 Provide overload protection and disconnect as required.

Actuators may be connected in parallel. Power consumption and input impedance must be observed.

 $\mathbf{A}$  Actuators may also be powered by DC 24 V.

Actuators with plenum cable do not have numbers; use color codes instead.

Meets cULus requirements without the need of an electrical ground connection.

### Warning! Live electrical components!

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

### Wiring diagrams

