

B239VS





Type overview

| Туре | DN |
|--------|----|
| B239VS | 40 |
| | |

Technical data

| Functional data | Valve size [mm] | 1.5" [40] |
|--------------------|-----------------------------------|---|
| | Fluid | chilled or hot water, up to 60% glycol, steam |
| | Fluid Temp Range (water) | -22280°F [-30138°C] |
| | Body Pressure Rating | 600 psig WOG psi |
| | Close-off pressure ∆ps | 600 psi |
| | Flow characteristic | modified equal percentage |
| | Max Differential Pressure (Steam) | 35 psi |
| | Flow Pattern | 2-way |
| | Leakage rate | ANSI Class VI |
| | Controllable flow range | 90° rotation |
| | Cv | 84 |
| | Maximum Inlet Pressure (Steam) | 35 psi [241 kPa] |
| | Maximum Velocity | 15 FPS |
| Materials | Valve body | Bronze B584-C84400 |
| | Housing seal | PTFE |
| | Spindle | 316 stainless steel |
| | Spindle seal | RPTFE |
| | Seat | RPTFE |
| | Lock nut | stainless steel |
| | Pipe connection | NPT female ends |
| | Retainer | B584-C84400 bronze |
| | Ball | 316 stainless steel |
| Suitable actuators | Non-Spring | GMB(X) |
| | | PRB(X) |
| | | GRCB(X) |
| | | GRB(X) |
| | Spring | AF |
| | Electrical fail-safe | PKRB(X) |
| | | |

Safety notes



• WARNING: This product can expose you to lead which is known to the State of California to cause cancer and reproductive harm. For more information go to www.p65warnings.ca.gov




ApplicationThis valve is typically used in air handling units on heating or cooling coils, and fan coil unit
heating or cooling coils. Some other common applications include Unit Ventilators, VAV Box re-
heat coils and bypass loops. This valve is suitable for use in a hydronic system with variable flow.
This valve is designed with MFT functionally which facilitates the use of various control input.
Up to 35 psi steam

1/2" - 2" 600 PSIG WOG, Cold Non-Shock Federal Specification: WW-V-35C, Type II Composition: BZ


Style: 3

Flow/Mounting details

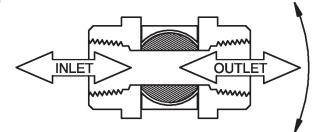

Dimensions

| Туре | DN |
|--------|----|
| B239VS | 40 |
| | |

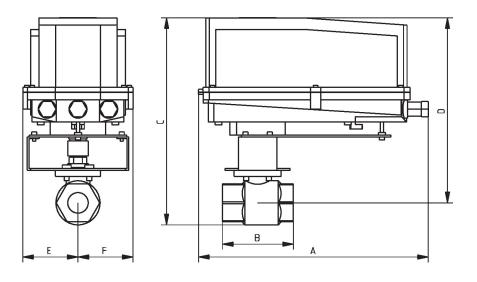

B239VS+GRC..N4

| A | В | С | D | Е | F |
|---------------|------------|------------|------------|-----------|-----------|
| 11.7" [297.5] | 4.4" [112] | 9.7" [247] | 7.7" [196] | 2.3" [58] | 2.3" [58] |



GMX24-MFT-X1

Modulating, Non-Spring Return, 24 V, Multi-Function Technology®







Technical data

| Electrical data | Nominal voltage | AC/DC 24 V |
|-----------------|------------------------------------|--|
| | Nominal voltage frequency | 50/60 Hz |
| | Nominal voltage range | AC 19.228.8 V / DC 21.628.8 V |
| | Power consumption in operation | 4.5 W |
| | Power consumption in rest position | 1.5 W |
| | Transformer sizing | 7 VA |
| | Electrical Connection | 18 GA plenum cable, 1 m, with 1/2" conduit |
| | | connector (3 m and 5 m available) |
| | Overload Protection | electronic throughout 095° rotation |
| Functional data | Torque motor | 40 Nm |
| | Operating range Y | 210 V |
| | Operating range Y note | 420 mA w/ ZG-R01 (500 Ω, 1/4 W resistor) |
| | Input Impedance | 100 k Ω for 210 V (0.1 mA), 500 Ω for 420 mA, 1500 Ω for PWM, On/Off and Floating point |
| | Operating range Y variable | Start point 0.530 V End point 2.532 V |
| | Operating modes optional | variable (VDC, on/off, floating point) |
| | Position feedback U | 210 V |
| | Position feedback U note | Max. 0.5 mA |
| | Position feedback U variable | VDC variable |
| | Direction of motion motor | selectable with switch 0/1 |
| | Manual override | external push button |
| | Angle of rotation | Max. 95° |
| | Angle of rotation note | adjustable with mechanical stop |
| | Running Time (Motor) | 150 s / 90° |
| | Running time motor variable | 90150 s |
| | Noise level, motor | 45 dB(A) |
| | Position indication | Mechanically, 3065 mm stroke |
| Safety data | Power source UL | Class 2 Supply |
| | Degree of protection IEC/EN | IP54 |
| | Degree of protection NEMA/UL | NEMA 2 |
| | Enclosure | UL Enclosure Type 2 |
| | Agency Listing | cULus acc. to UL60730-1A/-2-14, CAN/CSA |
| | | E60730-1:02 |
| | Ouglity Stopdard | CE acc. to 2014/30/EU and 2014/35/EU |
| | Quality Standard | ISO 9001 |
| | UL 2043 Compliant | Suitable for use in air plenums per Section 300.22(C) of the NEC and Section 602 of the |
| | | IMC |
| | Ambient humidity | Max. 95% RH, non-condensing |
| | Ambient temperature | -22122°F [-3050°C] |
| | Storage temperature | -40176°F [-4080°C] |
| | <u> </u> | |



GMX24-MFT-X1

Safety data Servicing

Materials

maintenance-free

4.9 lb [2.2 kg]

Weight Weight

Housing material

Galvanized steel and plastic housing

†Rated Impulse Voltage 800V, Type action 1, Control Pollution Degree 3. Footnotes

Accessories

| Electrical accessories | Description | Туре |
|------------------------|---|----------|
| | Battery backup system, for non-spring return models | NSV24 US |
| | Battery, 12 V, 1.2 Ah (two required) | NSV-BAT |
| | Service Tool, with ZIP-USB function, for programmable and communicative Belimo actuators, VAV controller and HVAC performance devices | ZTH US |

Electrical installation

X INSTALLATION NOTES

A Actuators with appliance cables are numbered.

Provide overload protection and disconnect as required.

- Actuators may also be powered by DC 24 V.
 - Only connect common to negative (-) leg of control circuits.
- A 500 Ω resistor (ZG-R01) converts the 4...20 mA control signal to 2...10 V.
- 🚯 Control signal may be pulsed from either the Hot (Source) or Common (Sink) 24 V line.

For triac sink the Common connection from the actuator must be connected to the Hot *b*A connection of the controller. Position feedback cannot be used with a triac sink controller; the actuator internal common reference is not compatible.

\Lambda IN4004 or IN4007 diode. (IN4007 supplied, Belimo part number 40155).

Actuators may be controlled in parallel. Current draw and input impedance must be observed.

4 Master-Slave wiring required for piggy-back applications. Feedback from Master to control input(s) of Slave(s).

Meets cULus requirements without the need of an electrical ground connection.

Warning! Live electrical components!

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

