

## **Technical data sheet**



The second	
	BRIAND AR





## Type overview

Туре	DN
B264	65

### **Technical data**

Functional data	Valve size [mm]	2.5" [65]		
	Fluid	chilled or hot water, up to 60% glycol		
	Fluid Temp Range (water)	0212°F [-18100°C]		
	Body Pressure Rating	400 psi		
	Close-off pressure Δps	100 psi		
	Flow characteristic	equal percentage		
	Pipe connection type	Internal thread		
		NPT (female)		
	Servicing	maintenance-free		
	Flow Pattern	2-way		
	Leakage rate	0% for A – AB		
	Controllable flow range	75°		
	Cv	150		
Materials	Valve body	Nickel-plated brass body		
	Stem	stainless steel		
	Stem seal	EPDM (lubricated)		
	Seat	PTFE		
	Characterized disc	TEFZEL®		
	O-ring	EPDM (lubricated)		
	Ball	stainless steel		
uitable actuators	Non-Spring	ARB(X)		
	Spring	AFRB(X)		

#### Safety notes



• WARNING: This product can expose you to lead which is known to the State of California to cause cancer and reproductive harm. For more information go to www.p65warnings.ca.gov

### **Product features**


Application

**on** This valve is typically used in air handling units on heating or cooling coils, and fan coil unit heating or cooling coils. Some other common applications include Unit Ventilators, VAV box reheat coils and bypass loops. This valve is suitable for use in a hydronic system with variable flow.



## **Technical data sheet**

## Flow/Mounting details

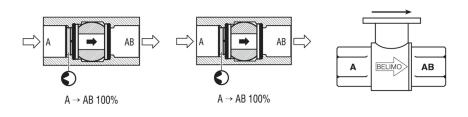


# Two-way valves should be installed with the disc upstream.

## Dimensions

<b>Type</b> B264	<b>DN</b> 65	Weight           8.1 lb [3.7 kg]
	ARB, ARX	
		A         B         C         D         E         F         H1           10.1" [257]         5.6" [141]         8.0" [203]         6.0" [152]         2.8" [71]         2.8" [71]         1.9" [48]
	AFRB, AFRX	
		A         B         C         D         E         F           11.5" [293]         5.6" [141]         8.6" [219]         6.6" [168]         2.0" [51]         2.0" [51]
	ARQB, ARQX	
		A         B         C         D         E         F         H1         H2           9.9" [251]         4.2" [107]         8.1" [206]         6.1" [155]         2.3" [58]         2.3" [58]         0.8" [20]         0.6" [15]



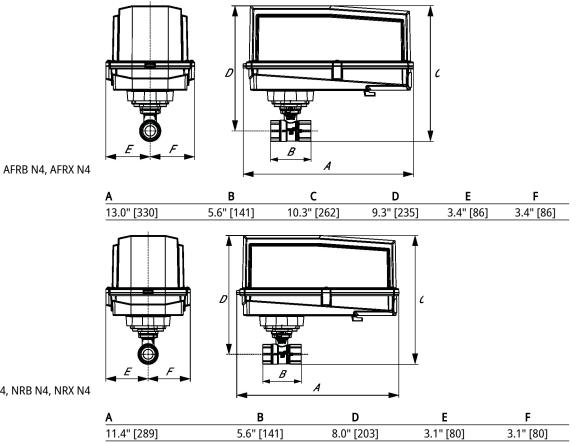

ARB N4, ARX N4, NRB N4, NRX N4



## On/Off, Floating point, Non fail-safe, 24 V





## **Technical data**

Electrical data	Nominal voltage	AC/DC 24 V		
	Nominal voltage frequency	50/60 Hz		
	Nominal voltage range	AC 19.228.8 V / DC 21.628.8 V		
	Power consumption in operation	2.5 W		
	Power consumption in rest position	0.5 W		
	Transformer sizing	5.5 VA		
Auxiliary switch		1x SPDT, 3 A resistive (0.5 A inductive) @ AC 250 V, adjustable 0100%		
	Switching capacity auxiliary switch	3 A resistive (0.5 A inductive) @ AC 250 V		
	Electrical Connection	18 GA plenum cable, 3 ft [1 m], with 1/2" NPT conduit connector		
	Overload Protection	electronic thoughout 090° rotation		
Functional data	Direction of motion motor	selectable with switch 0/1		
	Manual override	external push button		
	Angle of rotation	90°		
	Angle of rotation note	adjustable with mechanical stop		
	Running Time (Motor)	90 s / 90°		
	Noise level, motor	45 dB(A)		
	Position indication	Mechanical, pluggable		
Safety data	Power source UL	Class 2 Supply		
	Degree of protection IEC/EN	IP54		
	Degree of protection NEMA/UL	NEMA 2		
	Enclosure	UL Enclosure Type 2		
	Agency Listing	cULus acc. to UL60730-1A/-2-14, CAN/CSA E60730-1:02		
		CE acc. to 2014/30/EU and 2014/35/EU		
	Quality Standard	ISO 9001		
	UL 2043 Compliant	Suitable for use in air plenums per Section 300.22(C) of the NEC and Section 602 of the IMC		
	Ambient humidity	Max. 95% RH, non-condensing		
Ambient temperature Storage temperature		-22122°F [-3050°C]		
		-40176°F [-4080°C]		
	Servicing	maintenance-free		
Weight	Weight	2.5 lb [1.1 kg]		



Technical data					
	Materials	Housing material		Galvanized steel and p	lastic housing
I	Footnotes	†Rated Impulse Voltage 800V, Type action 1.B, Control Pollution Degree 3.			
Accessories					
Electrical ac	ccessories	Description			Туре
		Battery backup syste Battery, 12 V, 1.2 Ah	m, for non-spring retur (two required)	n models	NSV24 US NSV-BAT
Electrical installation					
<ul> <li>INSTALLATION NOTES</li> <li>Provide overload protection and disconnect as required.</li> <li>Actuators may be connected in parallel. Power consumption and input impedance must be observed.</li> <li>Actuators may also be powered by DC 24 V.</li> <li>Actuators Hot wire must be connected to the control board common. Only connect common to neg. (-) leg of control circuits. Terminal models (-T) have no-feedback.</li> <li>Actuators with plenum cable do not have numbers; use color codes instead.</li> <li>One built-in auxiliary switch (1x SPDT), for end position indication, interlock control, fan startup, etc.</li> <li>Apply only AC line voltage or only UL-Class 2 voltage to the terminals of auxiliary switches. Mixed or combined operation of line voltage/safety extra low voltage is not allowed.</li> <li>Warning! Live electrical components!</li> <li>During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.</li> </ul>					
Wiring diagrams On/Off 24 VAC Transformer Line Volts	-  Red	(1) Common (2) + Hot (3) Y Input	Floating Point 24 VAC Tra		1 2 3 18 (1) Common (2) + Hot (3) Y Input
24 VAC Transformer		1     2     3     18       Blk (1)     Common       Red (2)     + Hot       Wht (3)     Y Input	Floating Point - Triac S 24 VAC Trans Line Volts Hot	former	Image: 1 transformed by tran



## Electrical installation

Wiring diagrams Auxiliary Switches

