

3-way Mixing/Diverting, Characterized Control Valve, Chrome Plated Brass Ball and Nickel Plated Brass Stem







# Type overview

Туре	DN
B321B	20

#### **Technical data**

Functional data	Valve size [mm]	0.75" [20]
	Fluid	chilled or hot water, up to 60% glycol
	Fluid Temp Range (water)	0250°F [-18120°C]
	Body Pressure Rating	600 psi
	Close-off pressure Δps	200 psi
	Flow	A-port: as stated in chart B-port: 70% of A – AB Cv
	Flow characteristic	A-port equal percentage, B-port modified for constant common port flow
	Leakage rate	0% for A – AB, <2.0% for B – AB
	Pipe connection	Internal thread NPT (female)
	Servicing	maintenance-free
	Flow Pattern	3-way Mixing/Diverting
	Controllable flow range	75°
	Cv	24
Materials	Valve body	Nickel-plated brass body
	Stem	nickel-plated brass
	Stem seal	EPDM (lubricated)
	Seat	PTFE
	Characterized disc	TEFZEL®
	O-ring	EPDM (lubricated)
	Ball	chrome plated brass
Suitable actuators	Non Fail-Safe	LRB(X)
	Spring	(LFT)

## Safety notes




• WARNING: This product can expose you to lead which is known to the State of California to cause cancer and reproductive harm. For more information go to www.p65warnings.ca.gov




### Product features

Application This valve is typically used in air handling units on heating or cooling coils, and fan coil unit heating or cooling coils. Some other common applications include Unit Ventilators, VAV box re-heat coils and bypass loops. This valve is suitable for use in a hydronic system with variable or constant flow.

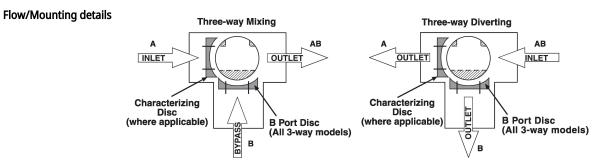

#### Dimensions

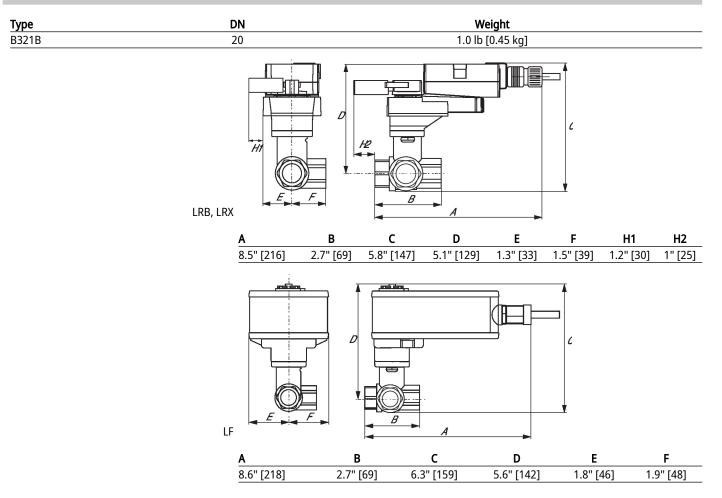



Modulating, Non fail-safe, 24 V





## **Technical data**

Electrical data	Nominal voltage	AC/DC 24 V
	Nominal voltage frequency	50/60 Hz
	Nominal voltage range	AC 19.228.8 V / DC 21.628.8 V
	Power consumption in operation	1.5 W
	Power consumption in rest position	0.2 W
	Transformer sizing	3 VA
	Electrical Connection	Screw terminal (for 26 to 14 GA wire)
	Overload Protection	electronic thoughout 090° rotation
	Electrical Protection	actuators are double insulated
Functional data	Operating range Y	210 V
	Operating range Y note	420 mA w/ ZG-R01 (500 Ω, 1/4 W resistor)
	Input impedance	100 kΩ for 210 V (0.1 mA), 500 Ω for 420 mA
	Position feedback U	210 V
	Position feedback U note	Max. 0.5 mA
	Direction of motion motor	selectable with switch 0/1
	Manual override	external push button
	Angle of rotation	90°
	Angle of rotation note	adjustable with mechanical stop
	Running Time (Motor)	90 s / 90°
	Noise level, motor	35 dB(A)
	Position indication	Mechanical, pluggable
Safety data	Power source UL	Class 2 Supply
	Degree of protection IEC/EN	IP54
	Degree of protection NEMA/UL	NEMA 2
	Enclosure	UL Enclosure Type 2
	Agency Listing	cULus acc. to UL60730-1A/-2-14, CAN/CSA E60730-1:02, CE acc. to 2014/30/EU
	Quality Standard	ISO 9001
	UL 2043 Compliant	Suitable for use in air plenums per Section 300.22(C) of the NEC and Section 602 of the IMC
	Ambient humidity	Max. 95% RH, non-condensing
	Ambient temperature	-22122°F [-3050°C]
	Storage temperature	-40176°F [-4080°C]
	Servicing	maintenance-free




Technical dat	ta
---------------	----

Technical data				
	Weight	Weight	1.3 lb [0.58 kg]	
	Materials	Housing material	Galvanized steel and plastic housing	
	Footnotes	†Rated Impulse Voltage 800V, Type o	f Action 1, Control Pollution Degree 2.	
Accessories				
	Electrical accessories	Description	Туре	
		Battery backup system, for non-spring Battery, 12 V, 1.2 Ah (two required) Auxiliary switch 1x SPDT add-on Auxiliary switch 2x SPDT add-on Feedback potentiometer 140 $\Omega$ add-on Feedback potentiometer 1 k $\Omega$ add-on Feedback potentiometer 10 k $\Omega$ add-o Feedback potentiometer 2.8 k $\Omega$ add-o Feedback potentiometer 500 $\Omega$ add-o Feedback potentiometer 5 k $\Omega$ add-on	NSV-BAT S1A S2A P140A GR a, grey P140A GR n, grey P1000A GR n, grey P2800A GR n, grey P2800A GR n, grey P500A GR	R
ectrical installation				
		observed. Actuators may also be powered by DC $\Omega$ Only connect common to negative (-) le A 500 $\Omega$ resistor (ZG-R01) converts the $\alpha$ Actuators are provided with a numbere Meets cULus requirements without the <b>Warning! Live electrical components!</b> During installation, testing, servicing an	. Power consumption and input impedance must 24 V. eg of control circuits.	cessar

who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components

### Wiring diagrams

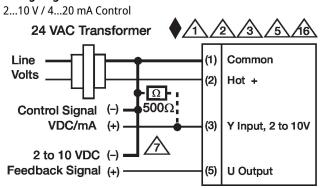

could result in death or serious injury.