

## **Butterfly Valve with**

- Bubble tight shut-off
- Resilient seat
- Valve face-to-face dimensions comply with API 609 & MSS-SP-67
- Completely assembled and tested, ready for installation





Picture may differ from product

ype overview	
<b>Гуре</b>	DN
6100L	4" [100]

# Fennical data Functional data Functional data Fluid Chilled and hot water, water with glycol up to max. 60% vol. Fluid temperature Body Pressure Rating ANSI Class Consistent with 125, 232 psi CWP Close-off pressure Δps 200 psi

Close-oπ pressure Δps	200 psi
Flow characteristic	equal percentage
Leakage rate	0% leakage
Pipe connection	Flange for use with ASME/ANSI class 125/150
Servicing	maintenance-free
Flow Pattern	2-way
Controllable flow range	90° rotation
Cv	798
Maximum Velocity	12 FPS


Lug threads	5/8-11 UNC	
Valve body	Ductile cast iron GGG40	
Valve plug	Stainless steel AISI 304 (CF-8, 1.4308)	
Stem	Stainless steel AISI 420 (1.4021)	
Stem seal	EPDM O-ring	
Stem bearing	Bronze, steel, PTFE	
Seat	EPDM	

Dimensions			
Туре	DN	Weight	
F6100L	4" [100]	14.8 lb [6.7 kg]	

Materials



# **Dimensions**

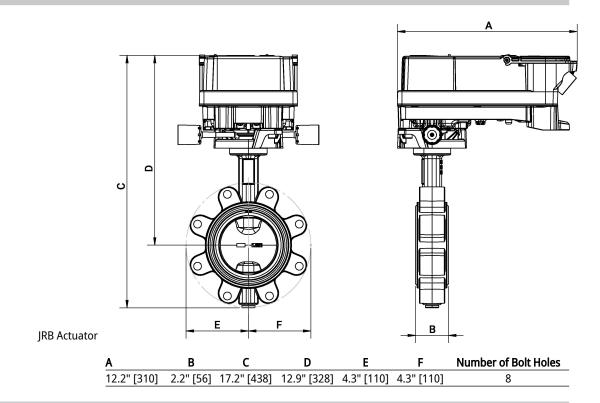

# **Further documentation**

- The complete product range for water applications
- Data sheets for actuators
- $\bullet$  Installation instructions for actuators and/or butterfly valves
- General notes for project planning

# Rotary actuator for butterfly valves

- Nominal voltage AC 24...240 V / DC 24...125 V
- Control Modulating, Communicative, Hybrid
- With two integrated auxiliary switches
- Conversion of sensor signals
- Communication via BACnet MS/TP, Modbus RTU, Belimo-MP-Bus or conventional control



Picture may differ from product

Technical data sheet



5-year warranty









Technical data		
Electrical data	Nominal voltage	AC 24240 V / DC 24125 V
	Nominal voltage frequency	50/60 Hz
	Nominal voltage range	AC 19.2264 V / DC 19.2137.5 V
	Power consumption in operation	20 W
	Power consumption in rest position	7 W
	Transformer sizing	with 24 V 20 VA / with 240 V 55 VA
	Auxiliary switch	2x SPDT, 1x 10° / 1x 090° (default setting 85°)
	Switching capacity auxiliary switch	1 mA3 A (0.5 A inductive), DC 5 VAC 250 V
	Connection protective earth	20 14 AWG, only copper wires
	Connection control	22 16 AWG, only copper wires (class 2 supply / SELV)
	Electrical Connection	Terminal blocks, (PE) Ground-Screw
	Overload Protection	electronic thoughout 090° rotation
Data bus communication	Communicative control	BACnet MS/TP Modbus RTU MP-Bus
	Number of nodes	BACnet / Modbus see interface description MP-Bus max. 16
Functional data	Position accuracy	±5%
	Manual override	hand lever
	Running Time (Motor)	35 s / 90°
	Running time motor variable	20120 s
	Noise level, motor	65 dB(A)
	Position indication	Mechanical, integrated
Safety data	Power source UL	Class 2 Supply
	Degree of protection IEC/EN	IP66/67
	Degree of protection NEMA/UL	NEMA 4X
	Housing	UL Enclosure Type 4X
	EMC	CE according to 2014/30/EU
	- I I I I I I I I I I I I I I I I I I I	

Low voltage directive

CE according to 2014/35/EU

	RR	UP-	М	FT.	-Т
J	IZD	UF-	IVI	L U	10

#### **Technical data**

Safety data
-------------

Certification IEC/EN	IEC/EN 60730-1 and IEC/EN 60730-2-14
UL Approval	cULus according to UL60730-1A, UL60730-2-14
	and CAN/CSA E60730-1
	The UL marking on the actuator depends on
	the production site, the device is UL-compliant
	in any case
Overvoltage category	III
Ambient humidity	Max. 100% RH
Ambient temperature	-22122°F [-3050°C]
Storage temperature	-40176°F [-4080°C]
Software Class	A
Servicing	maintenance-free
Connection flange	F07 (F05 only with accessory)
Weight	8.1 lb [3.7 kg]

# Safety notes



Weight

Mechanical data

- This device has been designed for use in stationary heating, ventilation and air-conditioning systems and must not be used outside the specified field of application, especially in aircraft or in any other airborne means of transport.
- · Caution: Line voltage!
- The device has a protective earthing. Incorrect connection of the protective earth can lead to hazards due to electrical shock.
- Only authorized specialists may carry out installation. All applicable legal or institutional installation regulations must be complied with during installation.
- Apart from the wiring compartment, the device may be opened only at the manufacturer's site. It does not contain any parts that can be replaced or repaired by the user.
- The device contains electrical and electronic components and must not be disposed of as household refuse. All locally valid regulations and requirements must be observed.
- The two switches integrated in the actuator are to be operated either on line voltage or on safety extra-low voltage. The combination line voltage/safety extra-low voltage is not permitted.
- For maintenance work, the correct valve position must be set via the control signal.

  Additionally, the actuator must be disconnected from the power source. The hand crank and manual override shall not be used as a safety measure to maintain the valve position.

#### **Product features**

#### Fields of application

The actuator is particularly suitable for utilisation in outdoor applications and is protected against the following weather conditions:

- UV radiation
- Dirt / Dust
- Rain / Snow
- Air humidity

## **Converter for sensors**

Connection option for two sensors (passive, active or switching contacts). In this way, the analog sensor signal can be easily digitized and transferred to the bus systems BACnet or Modbus.

#### Internal heating

An internal heater prevents condensation buildup.

Thanks to the integrated temperature and humidity sensor, the built-in heater automatically switches on/off.



#### **Product features**

**Parametrizable actuators** The factory settings cover the most common applications.

Belimo Assistant 2 is required for programming via Near Field Communication (NFC) and simplifies commissioning. Moreover, Belimo Assistant 2 provides a variety of diagnostic

options.

The ZTH EU service tool provides a selection of both diagnostic and setting options.

Combination analogue - communicative

(hybrid mode)

With conventional control by means of an analogue control signal, BACnet or Modbus can be used for the communicative position feedback

Simple direct mounting

Simple direct mounting on the butterfly valve. The mounting orientation in relation to the butterfly valve can be selected in 90° (angle) increments.

Manual override

The valve can be manually operated using a hand crank. Unlocking is carried out manually by removing the hand crank.

High functional reliability

The actuator is overload protected, requires no limit switches and automatically stops when the end stop is reached.

Innovative motorization

The actuator uses the powerful Belimo M600 microchip in combination with the INFORM method. It provides the full starting torque from a standstill with high precision (sensorless INFORM-Drive by Prof. Schrödl).

Flexible signaling

The actuator has one auxiliary switch with a fixed setting (10°) and one adjustable auxiliary switch (0...90°).

#### **Accessories**

Tools	Description	Туре
	Service-Tool for wired and wireless setup, on-site operation and troubleshooting.	Belimo Assistant 2
	Universal converter, with ZIP-USB function and Bluetooth to NFC conversion, for wired and wireless connection of the device to PC/tablet/smartphone	Belimo One Tool
	Connecting cable 16 ft [5 m], A: RJ11 6/4 ZTH EU, B: 6-pin for connection to service socket	ZK1-GEN
Mechanical accessories	Description	Туре
	Hand crank for JR actuator	ZJR20

## **Electrical installation**




Caution: Line voltage!


Parallel connection of other actuators possible. Observe the performance data.

The wiring of the line for BACnet MS/TP / Modbus RTU is to be carried out in accordance with applicable RS485 regulations.

AC 24...240 V / DC 24...125 V




Modulating control

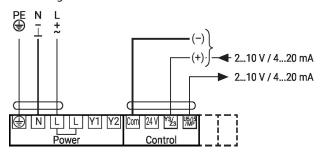




## **Electrical installation**

#### Auxiliary switch




Connection BACnet MS/TP / Modbus RTU

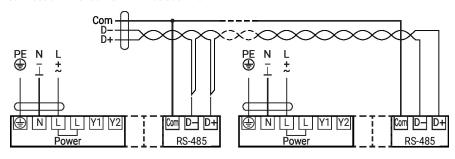

#### **Converter for sensors**


Connection of passive sensors (BACnet MS/TP / Modbus RTU / MP-Bus)

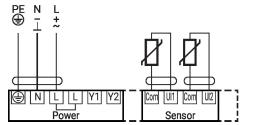

1)	2)
500 Ω2 kΩ	+/-1%
2 kΩ10 kΩ	+/-2%
10 kΩ55 kΩ	+/-6%

- 1) Resistance range
- 2) Resolution Compensation of the measured value is recommended
- Suitable for Ni1000 and Pt1000
- Suitable Belimo types 01DT-..

Switching contact connection (BACnet MS/TP / Modbus RTU / MP-Bus)

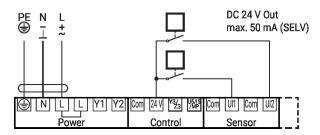


Switching contact requirements: The switching contact must be able to switch a current of 10 mA at 24 V accurately.

To capture, for example:

- Flow monitors
- Operation/malfunction messages of chillers

Connection of active sensors (BACnet MS/TP / Modbus RTU / MP-Bus)

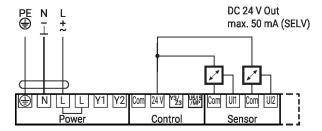

Possible input voltage range:

0...10 V

Resolution 5 mV

To capture, for example:


- Active temperature sensors
- Flow sensors
- Pressure/differential pressure sensors



# Further electrical installations


# Functions with basic values (conventional mode)

Connection on the MP-Bus

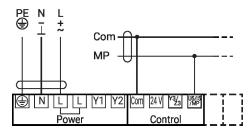


# Functions with specific parameters (parametrization necessary)


Control on/off








# Control floating point




Connection BACnet MS/TP / Modbus RTU with analog setpoint (hybrid mode)

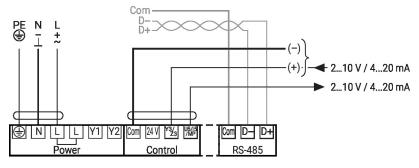



# Operating controls and indicators

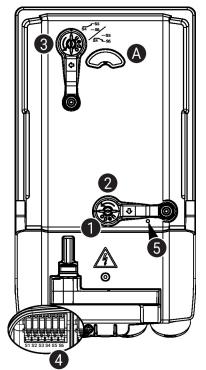

# 5 LED display green

Off: No power supply or malfunction

On: In operation

## **Auxiliary switch settings**



**Note:** Perform settings on the actuator only in deenergised state.

For the auxiliary switch position settings, carry out points 1 to 4 successively.

# 1 Gear train disengagement

Opening the manual override cover and adjusting the hand crank. Manual override is possible.

# 2 Manual override

Turn the hand crank until the desired switching position (A) is indicated and then remove the hand crank.

# 3 Auxiliary switch

For the auxiliary switch position settings, carry out points 1


to 4 successively.

Opening the auxiliary switch adjustment cover and adjusting the hand crank. Turn the hand crank until the arrow points to the line.

## 4 Terminals

Connect continuity tester to S4 + S5 or to S4 + S6.

If the auxiliary switch should switch in the opposite direction, rotate the hand crank by 180°.



## Service

Rotary Actuator, Modulating, Communicative, Hybrid, AC 24...240 V / DC 24...125 V, 90 Nm, Running Time (Motor) 35 s




# Service

#### Wireless connection

Belimo devices marked with the NFC logo can be operated with the Belimo Assistant 2. Requirement:


- NFC- or Bluetooth-capable smartphone
- Belimo Assistant 2 (Google Play and Apple AppStore)

Align NFC-capable smartphone on the device so that both NFC antennas are superposed. Connect Bluetooth-enabled smartphone via the Bluetooth-to-NFC converter ZIP-BT-NFC to the device. Technical data and operating instructions are shown in the ZIP-BT-NFC data sheet.

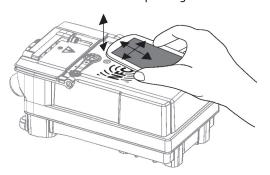


## Wired connection


The Belimo One Tool can configure the actuator via the service socket.

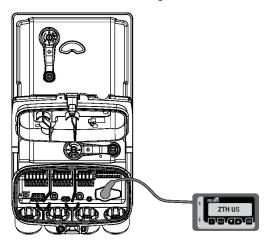



## **Dimensions**

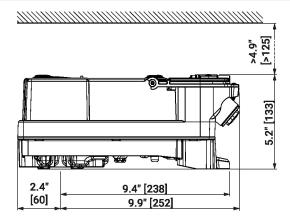

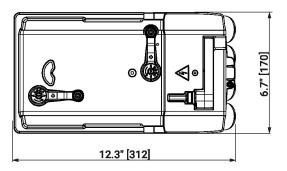

## **Further documentation**

- Tool connections
- BACnet Interface description
- Modbus Interface description
- Overview MP Cooperation Partners
- Introduction to MP-Bus Technology
- MP Glossary
- The complete product range for water applications
- Data sheets for butterfly valves
- Installation instructions for actuators and/or butterfly valves
- General notes for project planning
- Quick Guide Belimo Assistant 2