

Butterfly Valve with

- Disc 304 stainless steel
- Bubble tight shut-off
- Resilient seat
- Valve face-to-face dimensions comply with API 609 & MSS-SP-67
- Completely assembled and tested, ready for installation





Type overview			
Туре			DN
F6600HD			600
Technical data			
recrimical data			
	Functional data	Valve size [mm]	24" [600]
		Fluid	chilled or hot water, up to 60% glycol
		Fluid Temp Range (water)	-22250°F [-30120°C]
		Body Pressure Rating	ANSI Class Consistent with 125, 232 psi CW
		Close-off pressure ∆ps	150 psi
		Flow characteristic	modified equal percentage
		Leakage rate	0% leakage, leakage rateA
		Pipe connection	Flange
			for use with ASME/ANSI class 125/150
		Servicing	maintenance-free
		Flow Pattern	2-way
		Controllable flow range	90° rotation
		Cv	43116
		Maximum Velocity	12 FPS
		Lug threads	1 1/4-7 UNC
	Materials	Valve body	Ductile cast iron ASTM A536
		Body finish	epoxy powder coating (blue RAL 5002)
		Stem	416 stainless steel
		Stem seal	EPDM (lubricated)
		Seat	EPDM
		Disc	304 stainless steel

Suitable actuators


Non Fail-Safe

SY11




Product features

Flow/Mounting details

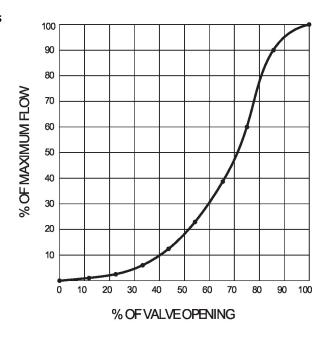

Dimensions

Туре	DN	Weight	
F6600HD	600	710 lh [320 kg]	

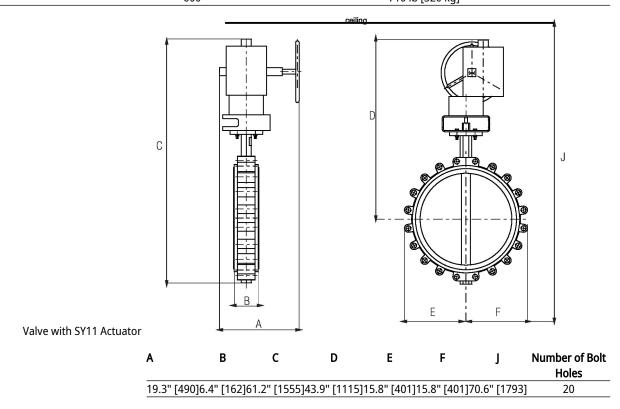



MFT/programmable, Non fail-safe, 120 V





	b No	
Technical data		
Electrical dat	a Nominal voltage	AC 120 V
	Nominal voltage frequency	50/60 Hz
	Nominal voltage range	AC 96132 V
	Transformer sizing	516 VA
	Current consumption	4.3 A
	Auxiliary switch	2x SPDT, 1 mA5 A (3 A inductive), DC 5 VAC 250 V, 1x 3° / 1x 87°
	Switching capacity auxiliary switch	1 mA5 A (3 A inductive), DC 5 VAC 250 V
	Electrical Connection	Terminal blocks
	Overload Protection	thermally protected 135°C cut-out
	Internal Humidty Control	resistive heating element
Functional dat	a Torque motor	3000 Nm
	Operating range Y	210 V
	Input impedance	100 kΩ
	Position feedback U	210 V
	Position feedback U note	Max. 0.5 mA
	Position feedback U variable	VDC variable
	Direction of motion motor	selectable with switch 0/1
	Manual override	hand wheel
	Angle of rotation	90°
	Running Time (Motor)	71 s
	Duty cycle value	50%
	Noise level, motor	45 dB(A)
	Position indication	top mounted domed indicator
Safety dat	a Degree of protection IEC/EN	IP66/67
	Degree of protection NEMA/UL	NEMA 4X
	Enclosure	UL Enclosure Type 4X
	Agency Listing	ISO, cCSAus
	Quality Standard	ISO 9001
	Ambient humidity	Max. 100% RH
	Ambient temperature	-22149°F [-3065°C]
	Storage temperature	-40176°F [-4080°C]
	Servicing	maintenance-free

160 lb [72 kg]

Weight Weight



Technical data

Materials

Housing material	die cast aluminium
Gear train	high alloy steel gear sets, self locking

Product features

Application

SY Series actuators are fractional horsepower devices, and utilize full-wave power supplies. Observe wire sizing and transformer sizing requirements. Proportional models CANNOT be connected to Belimo direct coupled (AF, AM, GM...etc) actuator power supplies or any type of half-wave device. You MUST use a separate, dedicated transformer or power supply to power the SY actuator. Please do not connect other automation equipment to the dedicated SY supply source. You MUST use four wires (plus a ground) to control a proportional control SY actuator (See SY Wiring Section).

Accessories

Gateways	Description	Туре		
	Gateway MP to BACnet MS/TP	UK24BAC		
	Gateway MP to Modbus RTU	UK24MOD		
	Gateway MP to LonWorks	UK24LON		
Electrical accessories	Description	Туре		
	Local electric disconnect for SY412 series actuator, AC 120 V, MFT	HOA-120VMFT		
	Service tool, with ZIP-USB function, for programmable and	ZTH US		
	communicative Belimo actuators, VAV controller and HVAC performance			
	devices			
	Battery backup system for SY712 series actuator, AC 120 V, on/off	EXT-NSV-B05-120		
Tools	Description	Туре		
	Connecting cable 10 ft [3 m], A: RJ11 6/4 ZTH EU, B: 3-pin Weidmüller and supply connection	ZK4-GEN		
	Service tool, with ZIP-USB function, for programmable and communicative Belimo actuators, VAV controller and HVAC performance devices	ZTH US		

Electrical installation



> INSTALLATION NOTES

Do not change sensitivity or dip switch setting with power applied.

6 Power supply Common/Neutral and Control Signal "-"wiring to a common is prohibited. Terminals 4 and 6 need to be wired separately.



<u>kallow</u> Isolation relays must be used in parallel connection of multiple actuators using a common control signal inputs. The relays should be DPDT.

fix Isolation relays are required in parallel applications. The reason parallel applications need isolation relays is that the motor uses two sets of windings, one for each direction. When one is energized to turn the actuator in a specific direction a voltage is generated in the other due to the magnetic field created from the first. It's called back EMF. This is not an issue with one actuator because the voltage generated in the second winding isn't connected to anything so there is no flow. On parallel applications without isolation, this EMF voltage energizes the winding it is connected to on the other actuators in the system, the actuators are tying to turn in both directions at once. The EMF voltage is always less than the supply voltage due to the resistance of the windings, so while the actuator still turns in the commanded direction, the drag from the other reduces the torque output and causes overheating.



Warning! Live electrical components!

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks.



Electrical installation

Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

Wiring diagrams

