

# **Technical data sheet**

## F680-150SHP

#### Butterfly Valve with ANSI Class 150 Lug types

- Disc 316 stainless steel
- Bubble tight shut-off
- Teflon seat
- Valve face-to-face dimensions comply with API 609 & MSS-SP-67
- For use with dead-end service
- Completely assembled and tested, ready for installation





#### Type overview

Туре	DN
F680-150SHP	80

#### **Technical data**

Functional data	Valve size [mm]	3" [80]
	Fluid	chilled or hot water, up to 60% glycol, steam
	Fluid Temp Range (water)	-22400°F [-30204°C]
	Body Pressure Rating	ANSI Class 150
	Close-off pressure ∆ps	285 psi
	Flow characteristic	modified equal percentage, unidirectional
	Pipe connection	Flange
		for use with ASME/ANSI class 150
	Servicing	maintenance-free
	Flow Pattern	2-way
	Leakage rate	0%
	Controllable flow range	quarter turn, mechanically limited
	Cv	228
	Maximum Inlet Pressure (Steam)	50 psi
	Maximum Velocity	32 FPS
	Lug threads	5/8-11 UNC
Materials	Valve body	Carbon steel full lug (ASME B16.34)
	Stem	17-4 PH stainless steel
	Seat	RPTFE
	Bearing	glass backed PTFE
	Disc	316 stainless steel
Suitable actuators	Non Fail-Safe	PRB(X)
		GMB(X)
	Spring	2*AFB(X)
	Electrical fail-safe	PKRB(X)
		GKRB(X)

## Safety notes




• WARNING: This product can expose you to lead which is known to the State of California to cause cancer and reproductive harm. For more information go to www.p65warnings.ca.gov




## **Product features**


Dimensions

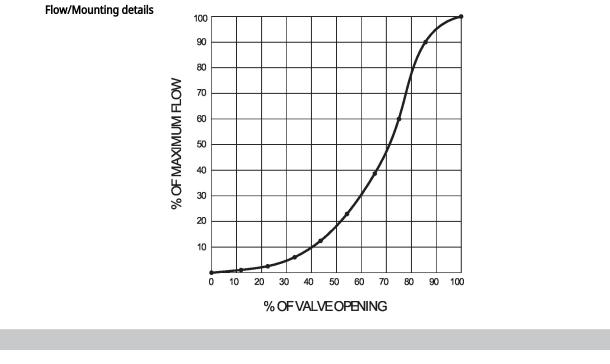


Туре	DN	Weight	
F680-150SHP	80	4.8 lb [2.2 kg]	

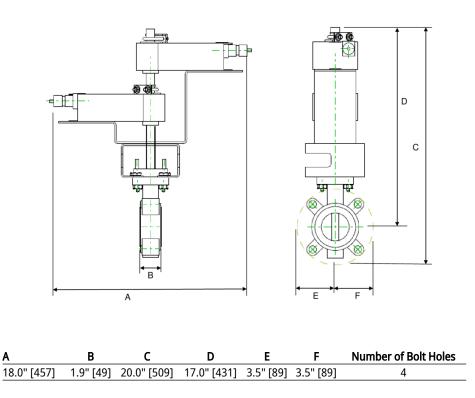



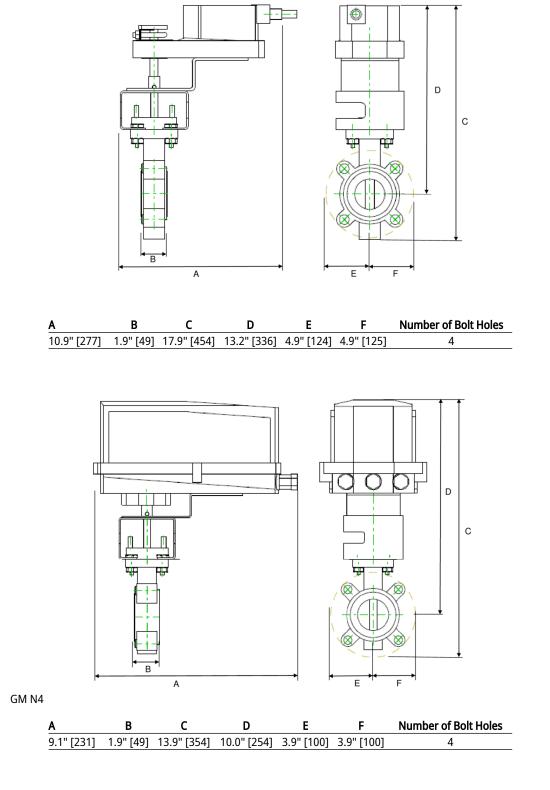



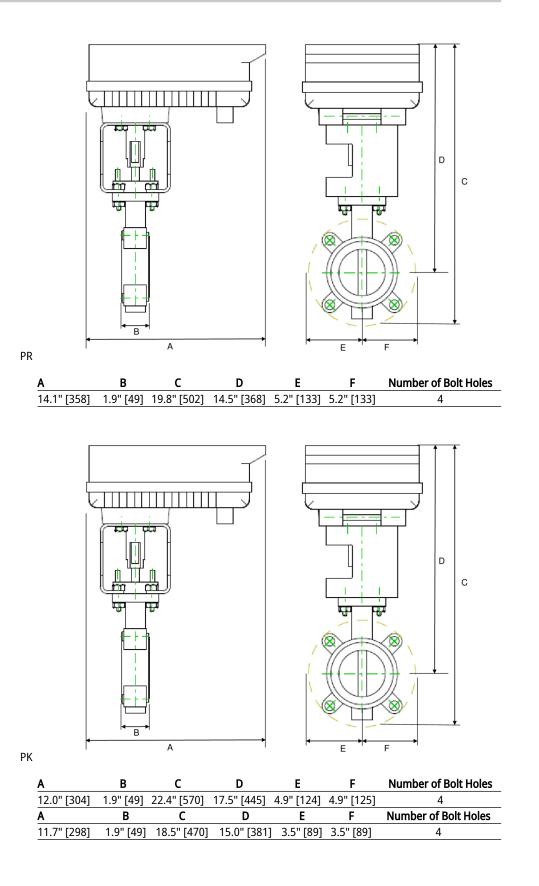



## MFT/programmable, Electrical fail-safe, 24 V








Electrical data	Nominal voltage	AC/DC 24 V
	Nominal voltage frequency	50/60 Hz
	Nominal voltage range	AC 19.228.8 V / DC 21.628.8 V
	Power consumption in operation	12 W
	Power consumption in rest position	3 W
	Transformer sizing	21 VA
	Electrical Connection	18 GA plenum cable, 1 m, 3 m, or 5 m with 1/2" NPT conduit connector, degree of protection NEMA 2 / IP54
	Overload Protection	electronic throughout 095° rotation
Functional data	Operating range Y	210 V
	Operating range Y note	420 mA w/ ZG-R01 (500 Ω, 1/4 W resistor)
	Input impedance	100 k $\Omega$ for 210 V (0.1 mA), 500 $\Omega$ for 420 mA, 1500 $\Omega$ for PWM, On/Off and Floating point
	Operating range Y variable	Start point 0.530 V End point 2.532 V
	Operating modes optional	variable (VDC, on/off, floating point)
	Position feedback U	210 V
	Position feedback U note	Max. 0.5 mA
	Position feedback U variable	VDC variable
	Bridging time (PF)	2 s
	Bridging time (PF) variable	010 s
	Pre-charging time	520 s
	Direction of motion motor	selectable with switch 0/1
	Direction of motion fail-safe	reversible with switch
	Manual override	external push button
	Angle of rotation	Max. 95°
	Angle of rotation note	adjustable with mechanical stop
	Running Time (Motor)	150 s / 90°
	Running time motor variable	95150 s
	Running time fail-safe	<35 s
	Noise level, motor	52 dB(A)
	Noise level, fail-safe	61 dB(A)
	Position indication	Mechanical, 3065 mm stroke
Safety data	Power source UL	Class 2 Supply



Technical data			
Safety data	Degree of protection IEC/EN	IP54	
	Degree of protection NEMA/UL	NEMA 2	
	Enclosure	UL Enclosure Type 2	
	Agency Listing	cULus acc. to UL60730-1A E60730-1:02 CE acc. to 2014/30/EU and	
	Quality Standard	ISO 9001	
	UL 2043 Compliant	Suitable for use in air pler 300.22(C) of the NEC and IMC	
	Ambient humidity	Max. 95% RH, non-conder	nsing
	Ambient temperature	-22122°F [-3050°C]	
	Storage temperature	-40176°F [-4080°C]	
	Servicing	maintenance-free	
Weight	Weight	4.0 lb [1.8 kg]	
Materials	Housing material	Galvanized steel and plast	tic housing
Footnotes	†Rated Impulse Voltage 800V, Type of a	action 1.AA, Control Pollution Degr	ee 3
Product features			
Bridging time	Power failures can be bridged up to a maximum of 10 s.		
	In the event of a power failure, the actuator will remain stationary in accord bridging time. If the power failure is greater than the set bridging time, the move into the selected fail-safe position.		
	The bridging time set at the factory is 2 the Belimo service tool MFT-P.	s. It can be modified on site in op	eration by means
	Settings: The rotary knob must not be s	set to the "PROG FAIL-SAFE" position	on!
	For retroactive adjustments of the brid the ZTH EU adjustment and diagnostic		
Accessories			
Electrical accessories	Description		Туре
	Feedback potentiometer 140 $\Omega$ add-on Feedback potentiometer 500 $\Omega$ add-on Feedback potentiometer 1 k $\Omega$ add-on, Feedback potentiometer 2.8 k $\Omega$ add-on Feedback potentiometer 5 k $\Omega$ add-on, Feedback potentiometer 10 k $\Omega$ add-on, Auxiliary switch 1x SPDT add-on Auxiliary switch 2x SPDT add-on Service tool, with ZIP-USB function, for communicative Belimo actuators, VAV of devices	, grey grey h, grey grey , grey programmable and	P140A GR P500A GR P1000A GR P2800A GR P5000A GR P10000A GR S1A S2A ZTH US
Electrical installation			
×	<b>INSTALLATION NOTES</b> Actuators with appliance cables are num Provide overload protection and disconn		



## Technical data sheet



- $\overline{\Lambda}$  A 500  $\Omega$  resistor (ZG-R01) converts the 4...20 mA control signal to 2...10 V.
- 🔏 Control signal may be pulsed from either the Hot (Source) or Common (Sink) 24 V line.
  - $\overline{\lambda}$  For triac sink the Common connection from the actuator must be connected to the Hot

connection of the controller. Position feedback cannot be used with a triac sink controller; the actuator internal common reference is not compatible.

- \Lambda IN4004 or IN4007 diode. (IN4007 supplied, Belimo part number 40155).
- $\bigwedge$  Actuators may be controlled in parallel. Current draw and input impedance must be observed.

Master-Slave wiring required for piggy-back applications. Feedback from Master to control input(s) of Slave(s).

Meets cULus requirements without the need of an electrical ground connection.

### Warning! Live electrical components!

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

