

Configurable damper actuator for adjusting dampers in technical building installations

- Air damper size up to approx. 8 m²
- Torque motor 40 Nm
- Nominal voltage AC/DC 24 V
- Control modulating 2...10 V variable
- Position feedback 2...10 V variable



Technical data

Electrical data	Nominal voltage	AC/DC 24 V
	Nominal voltage frequency	50/60 Hz
	Nominal voltage range	AC 19.228.8 V / DC 21.628.8 V
	Power consumption in operation	4.5 W
	Power consumption in rest position	1.5 W
	Power consumption for wire sizing	7 VA
	Connection supply / control	Cable 1 m, 4x 0.75 mm²
	Parallel operation	Yes (note the performance data)
Functional data	Torque motor	40 Nm

Parallel operation	Yes (note the performance data)
Torque motor	40 Nm
Torque variable	25%, 50%, 75% reduced
Operating range Y	210 V
Input impedance	100 kΩ
Operating range Y variable	Start point 0.530 V End point 2.532 V
Operating modes optional	Open/close 3-point (AC only) Modulating (DC 032 V)
Position feedback U	210 V
Position feedback U note	Max. 0.5 mA
Position feedback U variable	Start point 0.58 V End point 210 V
Position accuracy	±5%
Direction of motion motor	selectable with switch 0/1
Direction of motion variable	electronically reversible
Direction of motion note	Y = 0 V: At switch position 0 (ccw rotation) / 1 (cw rotation)
Manual override	with push-button, can be locked
Angle of rotation	Max. 95°
Angle of rotation note	can be limited on both sides with adjustable mechanical end stops
Running time motor	150 s / 90°
Running time motor variable	75290 s
Sound power level, motor	45 dB(A)
Adaptation setting range	manual



Technical data

Functional data	Adaptation setting range variable	No action Adaptation when switched on Adaptation after pushing the manual override button
	Override control	MAX (maximum position) = 100% MIN (minimum position) = 0% ZS (intermediate position, AC only) = 50%
	Override control variable	MAX = (MIN + 32%)100% MIN = 0%(MAX – 32%) ZS = MINMAX
	Mechanical interface	Universal shaft clamp reversible 1226.7 mm
	Position indication	Mechanical, pluggable
Safety data	Protection class IEC/EN	III, Safety Extra-Low Voltage (SELV)
	Power source UL	Class 2 Supply
	Degree of protection IEC/EN	IP54
	Degree of protection NEMA/UL	NEMA 2
	Housing	UL Enclosure Type 2
	EMC	CE according to 2014/30/EU
	Certification IEC/EN	IEC/EN 60730-1 and IEC/EN 60730-2-14
	UL Approval	cULus according to UL60730-1A, UL60730-2-14 and CAN/CSA E60730-1 The UL marking on the actuator depends on the production site, the device is UL-compliant in any case
	Type of action	Type 1
	Rated impulse voltage supply / control	0.8 kV
	Pollution degree	3
	Ambient humidity	Max. 95% RH, non-condensing
	Ambient temperature	-3050°C [-22122°F]
	Storage temperature	-4080°C [-40176°F]
	Servicing	maintenance-free
Weight	Weight	1.6 kg

Safety notes



- This device has been designed for use in stationary heating, ventilation and air-conditioning systems and must not be used outside the specified field of application, especially in aircraft or in any other airborne means of transport.
- Outdoor application: only possible in case that no (sea) water, snow, ice, insolation or aggressive gases interfere directly with the device and that it is ensured that the ambient conditions remain within the thresholds according to the data sheet at any time.
- Only authorised specialists may carry out installation. All applicable legal or institutional installation regulations must be complied with during installation.
- The device may only be opened at the manufacturer's site. It does not contain any parts that can be replaced or repaired by the user.
- Cables must not be removed from the device.
- To calculate the torque required, the specifications supplied by the damper manufacturers concerning the cross-section and the design, as well as the installation situation and the ventilation conditions must be observed.
- The device contains electrical and electronic components and must not be disposed of as household refuse. All locally valid regulations and requirements must be observed.



Product features

Operating mode The actuator is connected with a standard control signal of 0...10 V and drives to the position defined by the control signal. Measuring voltage U serves for the electrical display of the

damper position 0...100% and as control signal for other actuators.

Parametrisable actuators The factory settings cover the most common applications. Single parameters can be modified

with Belimo Assistant 2 or ZTH EU.

Simple direct mounting Simple direct mounting on the damper shaft with a universal shaft clamp, supplied with an

anti-rotation device to prevent the actuator from rotating.

Manual override Manual override with push-button possible (the gear train is disengaged for as long as the

button is pressed or remains locked).

Adjustable angle of rotation Adjustable angle of rotation with mechanical end stops.


High functional reliability The actuator is overload protected, requires no limit switches and automatically stops when

the end stop is reached.

Home position The first time the supply voltage is switched on, i.e. at the time of commissioning, the actuator

carries out a synchronisation. The synchronisation is in the home position (0%).

The actuator then moves into the position defined by the control signal.



Adaptation and synchronisation

An adaptation can be triggered manually by pressing the "Adaptation" button or with Belimo Assistant 2. Both mechanical end stops are detected during the adaptation (entire setting range).

Automatic synchronisation after pressing the manual override button is parametrised. The synchronisation is in the home position (0%).

The actuator then moves into the position defined by the control signal.

A range of settings can be made using Belimo Assistant 2.

Accessories

Tools	Description	Туре
	Service tool, with ZIP-USB function, for parametrisable and communicative Belimo actuators, VAV controller and HVAC performance devices	ZTH EU
	Service tool for wired and wireless setup, on-site operation, and troubleshooting.	Belimo Assistant 2
	Adapter for Service-Tool ZTH	MFT-C
	Connecting cable 5 m, A: RJ11 6/4 ZTH EU, B: 6-pin for connection to service socket	ZK1-GEN
	Connecting cable 5 m, A: RJ11 6/4 ZTH EU, B: free wire end for connection to MP/PP terminal	ZK2-GEN
Electrical accessories	Description	Туре
	Auxiliary switch 1x SPDT add-on	S1A
	Auxiliary switch 2x SPDT add-on	S2A
	Feedback potentiometer 140 Ω add-on	P140A
	Feedback potentiometer 1 k Ω add-on	P1000A
	Feedback potentiometer 10 k Ω add-on	P10000A
	Positioner for wall mounting	CRP24-B1
Mechanical accessories	Description	Туре
	Actuator arm for standard shaft clamp	AH-GMA
	Ball joint suitable for damper crank arm KH8 / KH10	KG10A



Accessories

Description	Туре
Damper crank arm Slot width 8.2 mm, clamping range ø1425 mm	KH10
Anti-rotation mechanism 230 mm, Multipack 20 pcs.	Z-ARS230
Mounting kit for linkage operation for flat installation	ZG-GMA
Baseplate extension for GMA to GM	Z-GMA
Position indicator, Multipack 20 pcs.	Z-PI


Electrical installation




Supply from isolating transformer.


Wire colours:

- 1 = black
- 2 = red
- 3 = white
- 5 = orange






1	2	3		
~L	Ļ L	2 V	~	(
⊸ L	↓ L	10 V	(\bigcirc

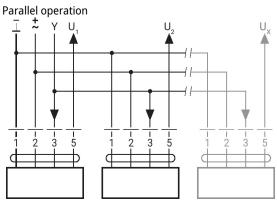

- Max. 8 actuators in parallel
- Parallel operation is permitted only on non-connected axes
- Do not fail to observe performance data with parallel operation

Wiring diagram piggy-back operation (mechanically coupled actuators)




- Max. 2 actuators in primary/ secondary operation
- Primary/secondary operation is permitted only on one fixed shaft or on two mechanically coupled shafts
- The programming of the primary actuator is adopted by the secondary actuator



Further electrical installations


Functions with basic values (conventional mode)


Override control with AC 24 V with relay contacts

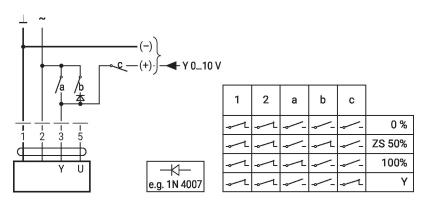


Control remotely 0...100% with positioner SG..

Minimum limit with positioner SG..

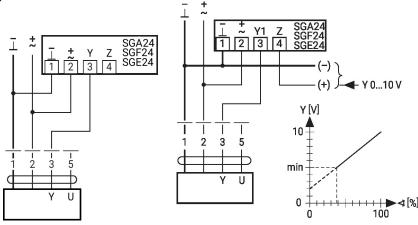

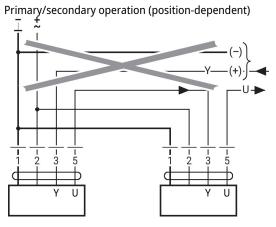


Override control with AC 24 V with rotary switch






Functions with basic values (conventional mode)

Control with 4...20 mA via external resistor



Functional check



Procedure

- 1. Connect 24 V to connections 1 and 2
- 2. Disconnect connection 3:
- With direction of rotation 0:

Actuator rotates to the left

- With direction of rotation 1:

Actuator rotates to the right

- 3. Short-circuit connections 2 and 3:
- Actuator runs in opposite direction


Caution:

to DC 2...10 V.


The operating range must be set

The 500 Ohm resistor converts the 4...20 mA current signal to a voltage signal DC 2...10 V.


Functions with specific parameters (Parametrisation necessary) Override control and limiting with AC 24 V with relay contacts



-	
e.g. 1N 4007	

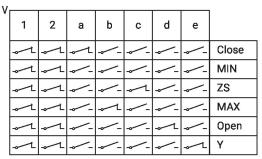

Control open/close






Further electrical installations


Functions with specific parameters (Parametrisation necessary)

Override control and limiting with AC 24 V with rotary switch




Caution:


The "Close" function is only guaranteed if the start point of the operating range is defined as min. 0.5 V.



Control 3-point with AC 24 V



Operating controls and indicators

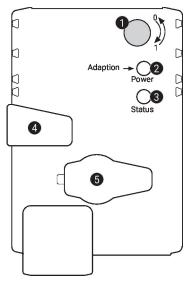

Direction of rotation switch

Switch over: Direction of rotation changes

2 Push-button and LED display green

Off: No power supply or malfunction

On: In operation

Press button: Triggers angle of rotation adaptation, followed by standard mode

3 Push-button and LED display yellow

Off: Standard mode

On: Adaptation or synchronisation process active

Press button: No function

4 Manual override button

Press button: Gear train disengages, motor stops, manual override possible

Release Gear train engages, synchronisation starts, followed by standard

button: mode

5 Service plug

For connecting parametrisation and service tools

Check power supply connection

2 Off and 3 On Possible wiring error in power supply




Service

Wired connection

The device can be parametrised by ZTH EU via the service socket.


For an extended parametrisation, Belimo Assistant 2 can be connected.

Connection ZTH EU / Belimo Assistant 2

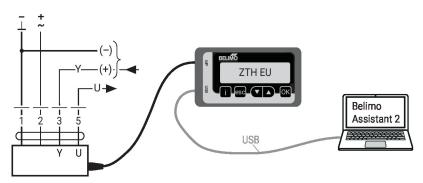



Dimensions





Clamping range



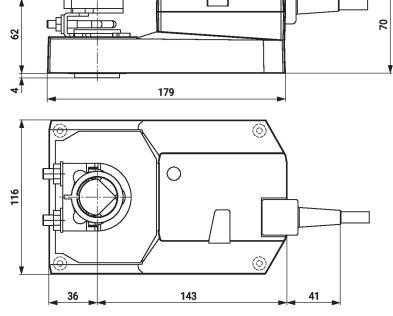

Further documentation

• Quick Guide – Belimo Assistant 2