

## **Technical data sheet**

Rotary actuator fail-safe for adjusting dampers in technical building installations

- Air damper size up to approx. 0.8 m<sup>2</sup>
- Torque motor 4 Nm
- Nominal voltage AC 100...240 V
- Control Open/close
- PWIS/LABS-compliant according to VDMA 24364



## **Technical data**

Electrical data	Nominal voltage	AC 100240 V
	Nominal voltage frequency	50/60 Hz
	Nominal voltage range	AC 85265 V
	Power consumption in operation	3.5 W
	Power consumption in rest position	2 W
	Power consumption for wire sizing	6.5 VA
	Power consumption for wire sizing note	Imax 150 mA @ 10 ms
	Connection supply / control	Cable 1 m, 2x 0.75 mm <sup>2</sup>
	Parallel operation	Yes (note the performance data)
Functional data	Torque motor	4 Nm
	Torque fail-safe	4 Nm
	Direction of motion motor	selectable by mounting L/R
	Direction of motion fail-safe	selectable by mounting L/R
	Manual override	No
	Angle of rotation	Max. 95°
	Angle of rotation note	Adjustable 37100% with integrated mechanical limitation
	Running time motor	75 s / 90°
	Running time fail-safe	<20 s @ -2050°C / <60 s @ -30°C
	Sound power level, motor	50 dB(A)
	Mechanical interface	Universal shaft clamp 816 mm
	Position indication	Mechanical
	Service life	Min. 60'000 fail-safe positions
Safety data	Protection class IEC/EN	II, reinforced insulation
	Degree of protection IEC/EN	IP54
	EMC	CE according to 2014/30/EU
	Low voltage directive	CE according to 2014/35/EU
	Certification IEC/EN	IEC/EN 60730-1 and IEC/EN 60730-2-14
	PWIS/LABS-conformity	According to VDMA 24364 (test class C1) Approved for use in zone II Cleaning with low-pressure plasma treatment
	Hygiene test	According to VDI 6022 Part 1 / SWKI VA 104-01, cleanable and disinfectable, low emission
	Type of action	Туре 1.В
	Rated impulse voltage supply / control	4 kV



# Technical data sheet

Safety data	Pollution degree	3
	Ambient humidity	Max. 95% RH, non-condensing
	Ambient temperature	-3050°C [-22122°F]
	Storage temperature	-1040°C [14104°F]
	Servicing	maintenance-free
Weight	Weight	1.6 kg


## Safety notes

Surcey notes		
Ţ	<ul> <li>This device has been designed for use in stationary heating, venti systems and must not be used outside the specified field of applic or in any other airborne means of transport.</li> <li>Outdoor application: only possible in case that no (sea) water, snot aggressive gases interfere directly with the device and that it is er conditions remain within the thresholds according to the data shee.</li> <li>Caution: Power supply voltage!</li> <li>Only authorised specialists may carry out installation. All applicab installation regulations must be complied with during installation</li> <li>The device may only be opened at the manufacturer's site. It does can be replaced or repaired by the user.</li> <li>Cables must not be removed from the device.</li> <li>To calculate the torque required, the specifications supplied by th concerning the cross-section and the design, as well as the installation conditions must be observed.</li> <li>The device contains electrical and electronic components and must household refuse. All locally valid regulations and requirements in UABS-compliant packaging has been opened, the proper handling responsibility of the customer. PWIS/LABS-conformity of unopenent of the data so the period of one year after cleaning, provided they are handled to be applied by the content of the customer.</li> </ul>	ation, especially in aircra ow, ice, insolation or nsured that the ambient eet at any time. le legal or institutional s not contain any parts that ation situation and the st not be disposed of as nust be observed. unopened. Once the PWIS of the products is the ed products is guaranteed
	and cleanly. Proof of proper, professional and clean handling is th purchaser. Ensure that the required cleanliness of the products is the products with bare hands. Belimo accepts no liability for the c from the contamination of a product caused by the customer.	maintained. Do not touch
Product features	purchaser. Ensure that the required cleanliness of the products is the products with bare hands. Belimo accepts no liability for the c	maintained. Do not touch
Product features Operating mode	purchaser. Ensure that the required cleanliness of the products is the products with bare hands. Belimo accepts no liability for the c	maintained. Do not touch onsequences resulting me time as tensioning the
	purchaser. Ensure that the required cleanliness of the products is the products with bare hands. Belimo accepts no liability for the c from the contamination of a product caused by the customer. The actuator moves the damper to the operating position at the sar return spring. The damper is turned back to the safety position by s	maintained. Do not touch onsequences resulting me time as tensioning the pring energy when the
Operating mode	<ul> <li>purchaser. Ensure that the required cleanliness of the products is the products with bare hands. Belimo accepts no liability for the c from the contamination of a product caused by the customer.</li> <li>The actuator moves the damper to the operating position at the same return spring. The damper is turned back to the safety position by s supply voltage is interrupted.</li> <li>Simple direct mounting on the damper shaft with a universal shaft.</li> </ul>	maintained. Do not touch onsequences resulting me time as tensioning the pring energy when the
Operating mode Simple direct mounting	purchaser. Ensure that the required cleanliness of the products is the products with bare hands. Belimo accepts no liability for the c from the contamination of a product caused by the customer. The actuator moves the damper to the operating position at the sar return spring. The damper is turned back to the safety position by s supply voltage is interrupted. Simple direct mounting on the damper shaft with a universal shaft anti-rotation device to prevent the actuator from rotating.	maintained. Do not touch onsequences resulting me time as tensioning the pring energy when the
Operating mode Simple direct mounting Adjustable angle of rotation	purchaser. Ensure that the required cleanliness of the products is the products with bare hands. Belimo accepts no liability for the c from the contamination of a product caused by the customer. The actuator moves the damper to the operating position at the sar return spring. The damper is turned back to the safety position by s supply voltage is interrupted. Simple direct mounting on the damper shaft with a universal shaft anti-rotation device to prevent the actuator from rotating.	maintained. Do not touch onsequences resulting me time as tensioning the pring energy when the
Operating mode Simple direct mounting Adjustable angle of rotation Accessories	purchaser. Ensure that the required cleanliness of the products is the products with bare hands. Belimo accepts no liability for the c from the contamination of a product caused by the customer. The actuator moves the damper to the operating position at the sar return spring. The damper is turned back to the safety position by s supply voltage is interrupted. Simple direct mounting on the damper shaft with a universal shaft anti-rotation device to prevent the actuator from rotating. Adjustable angle of rotation with mechanical end stops. Description Auxiliary switch 2x SPDT	maintained. Do not touch onsequences resulting me time as tensioning the spring energy when the clamp, supplied with an <b>Type</b> S2A-F
Operating mode Simple direct mounting Adjustable angle of rotation Accessories Electrical accessories	purchaser. Ensure that the required cleanliness of the products is         the products with bare hands. Belimo accepts no liability for the c         from the contamination of a product caused by the customer.         The actuator moves the damper to the operating position at the sar         return spring. The damper is turned back to the safety position by s         supply voltage is interrupted.         Simple direct mounting on the damper shaft with a universal shaft anti-rotation device to prevent the actuator from rotating.         Adjustable angle of rotation with mechanical end stops.         Description         Auxiliary switch 2x SPDT         Feedback potentiometer 1 kΩ	maintained. Do not touch onsequences resulting me time as tensioning the spring energy when the clamp, supplied with an <b>Type</b> S2A-F P1000A-F
Operating mode Simple direct mounting Adjustable angle of rotation Accessories	purchaser. Ensure that the required cleanliness of the products is the products with bare hands. Belimo accepts no liability for the c from the contamination of a product caused by the customer. The actuator moves the damper to the operating position at the sar return spring. The damper is turned back to the safety position by s supply voltage is interrupted. Simple direct mounting on the damper shaft with a universal shaft anti-rotation device to prevent the actuator from rotating. Adjustable angle of rotation with mechanical end stops. Description Auxiliary switch 2x SPDT	maintained. Do not toucl onsequences resulting me time as tensioning the spring energy when the clamp, supplied with an <b>Type</b> S2A-F
Operating mode Simple direct mounting Adjustable angle of rotation Accessories Electrical accessories	purchaser. Ensure that the required cleanliness of the products is the products with bare hands. Belimo accepts no liability for the of from the contamination of a product caused by the customer. The actuator moves the damper to the operating position at the sar return spring. The damper is turned back to the safety position by s supply voltage is interrupted. Simple direct mounting on the damper shaft with a universal shaft anti-rotation device to prevent the actuator from rotating. Adjustable angle of rotation with mechanical end stops. Description Auxiliary switch 2x SPDT Feedback potentiometer 1 kΩ Description Shaft extension 170 mm ø10 mm for damper shaft ø616 mm Shaft clamp reversible, clamping range ø1620 mm	maintained. Do not touch onsequences resulting me time as tensioning the spring energy when the clamp, supplied with an clamp, supplied with an S2A-F P1000A-F Type AV6-20 K6-1
Operating mode Simple direct mounting Adjustable angle of rotation Accessories Electrical accessories	purchaser. Ensure that the required cleanliness of the products is         the products with bare hands. Belimo accepts no liability for the c         from the contamination of a product caused by the customer.         The actuator moves the damper to the operating position at the same return spring. The damper is turned back to the safety position by s         supply voltage is interrupted.         Simple direct mounting on the damper shaft with a universal shaft anti-rotation device to prevent the actuator from rotating.         Adjustable angle of rotation with mechanical end stops.         Description         Auxiliary switch 2x SPDT         Feedback potentiometer 1 kΩ         Description         Shaft extension 170 mm ø10 mm for damper shaft ø616 mm	maintained. Do not touch onsequences resulting me time as tensioning the spring energy when the clamp, supplied with an clamp, supplied with an <u>Type</u> S2A-F P1000A-F Type AV6-20



Description	Туре
Damper crank arm Slot width 8.2 mm, clamping range ø1018 mm	KH8
Actuator arm, clamping range ø816 mm, Slot width 8.2 mm	KH-LF
Angle of rotation limiter, with end stop	ZDB-LF
Form fit adapter 8x8 mm	ZF8-LF
Mounting kit for linkage operation for flat installation	ZG-LF1
Mounting kit for linkage operation for side installation Slot width 6.2	ZG-LF3
mm	
Anti-rotation mechanism 180 mm, Multipack 20 pcs.	Z-ARS180L


## **Electrical installation**



## Wire colours:

1 = blue 2 = brown

#### Wiring diagrams




## Dimensions

#### Spindle length

	Min. 84
	Min. 20 mm [0.75"]

## **Clamping range**

<b>O</b> I	
816	816

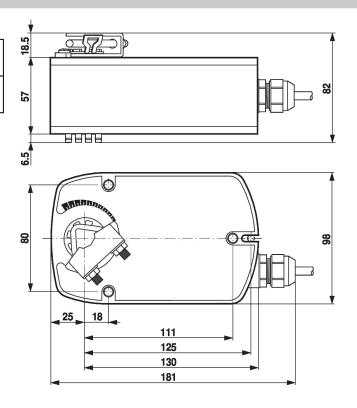

Parallel connection of other actuators possible. Observe the performance data.